

## Product Datasheet

# 6-Port Full Gigabit Managed bt Industrial PoE Switch

## (ONV-IPS33064PFM-bt)



## OVERVIEW

ONV-IPS33064PFM-bt is a full Gigabit managed bt industrial PoE switch independently developed by ONV. It has 4\*10/100/1000M RJ45 ports and 2\*100/1000M SFP fiber slot ports. Port 1-4 can support 71W PoE super high power output and backward compatible with the IEEE802.3af/at PoE standard. Single-port PoE power output is 95W. As a PoE power supply device, it can automatically detect and recognize the power-receiving equipment that meets the standard and supply power through the network cable. It provides stable and safe terminals for PTZ network domes, high-power wireless AP, high-power network multimedia speakers, and high-power POE lighting, etc. through a network cable to meet the network environment that needs high-density PoE power supply. It is suitable for intelligent transportation, rail transit, electric power, mining, metallurgy and green energy. Industrial scenes such as construction set up a cost-effective and stable communication network.

The ONV-IPS33064PFM-bt has L2+ full network management function, support IPV4/

IPV6 management, static route full line rate forwarding, security protection mechanism, ACL/QoS policy and VLAN, and is easy to manage and maintain. Support multiple network redundancy protocols STP/RSTP/MSTP(<50ms) and (ITU-T G.8032) ERPS(<20ms) to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application requirements, you can configure multiple application services such as PoE power management, port traffic control, VLAN division, and SNMP through the Web network management mode.

## FEATURE

### ■ Gigabit access, SFP fiber port uplink

- ◇ All series support “Gigabit Ethernet port and Gigabit SFP port” combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

### ■ Intelligent PoE power supply

- ◇ 4\*10/100/1000Base-T RJ45 ports can support bt PoE power supply, meeting the demand for super high power PoE power supply in various scenarios.
- ◇ IEEE 802.3af/at PoE standard, without damaging non-PoE devices.
- ◇ Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.
- ◇ Set on the Web network management interface to control the PoE port power supply based on the user-defined time period.
- ◇ Customize the output power of the PoE port, the output power range covers the 5-95W PoE terminal load, providing a more practical configuration for the flexible use and control of PoE.

### ■ PoE network management and fast Ring function

- ◇ IEEE802.1Q VLAN, flexible VLAN division, Voice VLAN and QinQ configuration.
- ◇ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including EQU, SP, WRR & SP+WRR.
- ◇ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.
- ◇ IGMP V1/V2 and IGMP Snooping.
- ◇ ERPS/STP/RSTP/MSTP.
- ◇ Static and dynamic aggregation.

### ■ Security

- ◇ 802.1X authentication.
- ◇ Port isolation, Storm control.
- ◇ IP-MAC-VLAN-Port binding.

### ■ Stable and reliable

- ◇ Low power consumption, fan-less design, aluminum shell.
- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel, it can show the device status through the LED indicator of PWR, SYS, Link, L/A, PoE.

### ■ One-stop remote control and management

- ◇ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).
- ◇ HTTPS, SSLV3, and SSHV1/V2.
- ◇ RMON, system log, LLDP, and port traffic statistics.
- ◇ CPU monitoring, memory monitoring, Ping test, and cable diagnose.

## TECHNICAL SPECIFICATION

Model	ONV-IPS33064PFM-bt
<b>Interface Characteristics</b>	
Fixed Port	4*10/100/1000M bt PoE ports (Data/Power) 2*100/1000M uplink SFP slot ports (Data) 1 * RS232 console port(115200,N,8,1) 2 set of V+, V- redundant DC power interface (5 Pin Phoenix terminal)
Ethernet Port	Port 1-4 support 10/100/1000Base-T, auto-sensing, Full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)
SFP Slot Port	Gigabit SFP optical fiber interface, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Optical Cable/ Distance	Multi mode: 850nm /0 ~ 500M, single mode: 1310nm /0 ~ 40KM, 1550nm /0 ~ 120KM.
<b>Chip Parameter</b>	
Network Management Type	L2+
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-X, IEEE802.3x
Forwarding Mode	Store and Forward(Full Wire Speed)
Switching Capacity	128Gbps

Forwarding Rate@64byte	8.93Mpps
MAC	8K
Buffer Memory	4M
Jumbo Frame	9.6K
LED Indicator	Power/ System : SYS (green) , Network: Link (yellow), fiber port: L/A (green), PoE: PoE (green)
Reset Switch	Yes, (Press and hold for 10 seconds and release, the switch will restore the factory settings)
<b>PoE &amp; Power</b>	
PoE Port	Port 1- 4 @bt POE and backward compatible with IEEE802.3af/at
PoE Management	PoE working status Delay start of power supply PoE output priority configuration Scheduling of PoE operation and time Total power limit of PoE power supply PoE output power allocation, off& af &at
Power Supply Pin	Defaul 1/2 (+), 3/6 (-), 4/5 (+), 7/8 (-)
Max Power Per Port	95W, IEEE802.3af/at/bt, when 4 ports are used at the same time, the average power per port is maximum 71W
Total PWR / Input Voltage	240W (DC48-57V)
Power Consumption	Standby<8W, Full load<240W
Working Voltage	48-57VDC; 5 Pin industrial Phoenix terminal, support anti-reverse protection.
Power Supply	No, optional 48V/240W or 48V/480W industrial power supply
<b>Physical Parameter</b>	

Operation TEMP / Humidity	-40~+80°C;5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+85°C;5%~95% RH Non condensing
Dimension (L*W*H)	145*134.5*47.5mm
Net /Gross Weight	<0.6kg / <0.8kg
Installation	Desktop, DIN rail
<b>Certification &amp; Warranty</b>	
Lightning protection / protection level	<p>Lightning protection: 6KV 8/20us; Protection level: IP40</p> <p>IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge</p> <p>IEC61000-4-3(RS):10V/m(80~1000MHz)</p> <p>IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV</p> <p>IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV</p> <p>IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz)</p> <p>IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s</p> <p>IEC61000-4-9(pulsed magnet field):1000A/m</p> <p>IEC61000-4-10(damped oscillation):30A/m 1MHz</p> <p>IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV</p> <p>IEC61000-4-16(common-mode transmission):30V; 300V,1s</p> <p>FCC Part 15/CISPR22(EN55022):Class A</p> <p>IEC61000-6-2(Common Industrial Standard)</p>
Mechanical Properties	<p>IEC60068-2-6 (anti vibration)</p> <p>IEC60068-2-27 (anti shock)</p> <p>IEC60068-2-32 (free fall)</p>


Certification	CCC;CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B; RoHS
Warranty	5 years, lifelong maintenance.
<b>Network Management Features</b>	
Interface	IEEE802.3X (Full-duplex) Port temperature protection setting Port green Ethernet Energy-saving setting Broadcast storm control based on port speed The speed limit of the message flow in the access port. The minimum particle size is 64Kbps.
Layer 3 Features	L2+ network management ,IPV4/IPV6 management L3 soft routing forwarding, Static route, Default route @ 128 pcs, APR @ 1024 pcs
VLAN	4K VLAN based on port, IEEE802.1q VLAN based on the protocol VLAN based on MAC Voice VLAN, QinQ configuration Port configuration of Access, Trunk, Hybrid
Port Aggregation	LACP, Static aggregation Max 3 aggregation groups and 8 ports per group.
Spanning Tree	STP (IEEE802.1d),RSTP (IEEE802.1w),MSTP (IEEE802.1s)
Industrial Ring	G.8032 (ERPS),Recovery time less than 20ms
Network Protocol	250 Ring at most, Max 250 devices per ring.
Multicast	MLD Snooping v1/v2,Multicast VLAN IGMP Snooping v1/v2, Max 1024 multicast groups, Fast log out
Port Mirroring	Bidirectional data mirroring based on port
QoS	Flow-based Rate Limiting Flow-based Packet Filtering 8*Output queues of each port

	<p>802.1p/DSCP priority mapping</p> <p>Diff-Serv QoS, Priority Mark/Remark</p> <p>Queue Scheduling Algorithm (SP, WRR, SP+WRR)</p>
ACL	<p>Port-based Issuing ACL, ACL based on port and VLAN</p> <p>L2 to L4 packet filtering, matching first 80 bytes message. Provide</p> <p>ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc.</p>
Security	<p>IP-MAC-VLAN-Port binding</p> <p>ARP inspection, Anti-DoS attack</p> <p>AAA &amp; RADIUS, MAC learning limit</p> <p>Mac black holes, IP source protection</p> <p>IEEE802.1X &amp; MAC address authentication</p> <p>Broadcast storm control, Backup for host datum</p> <p>SSH 2.0, SSL, Port isolation, ARP message speed limit</p> <p>User hierarchical management and password protection</p>
DHCP	<p>DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay</p>
Management	<p>One-key recovery</p> <p>Cable Diagnose, LLDP</p> <p>Web Management (HTTPS)</p> <p>NTP, System work log, Ping Test</p> <p>CPU instant utilization status view</p> <p>Console/AUX Modem/Telnet/SSH2.0 CLI</p> <p>Download &amp; Management on FTP, TFTP, Xmodem, SFTP, SNMP V1/V2C/V3</p> <p>ONV NMS - smart network management system platform (LLDP+SNMP)</p>
System	<p>Category 5 Ethernet network cable</p> <p>Web browser: Mozilla Firefox 2.5 or higher, Google browser</p>




chrome V42 or higher, Microsoft Internet Explorer10 or later;  
 TCP/IP, network adapter, and network operating system (such as  
 Microsoft Windows, Linux, or Mac OS X) installed on each  
 computer in a network

## DIMENSION

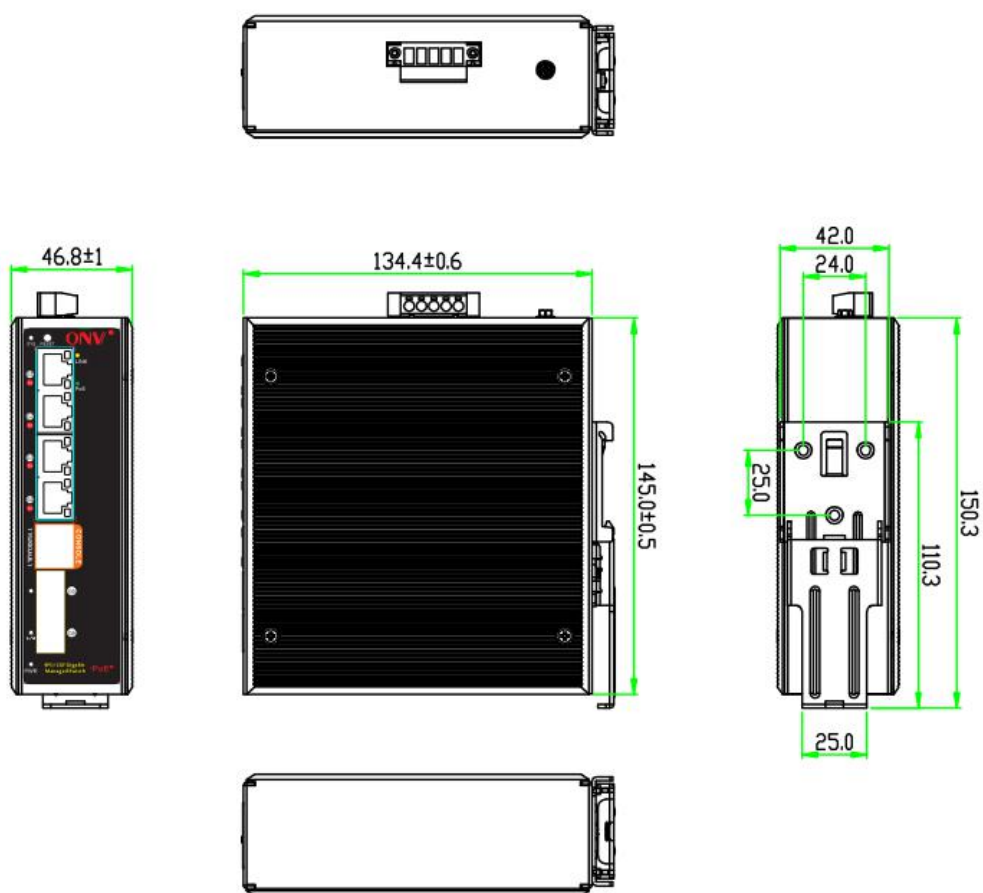

## APPLICATION

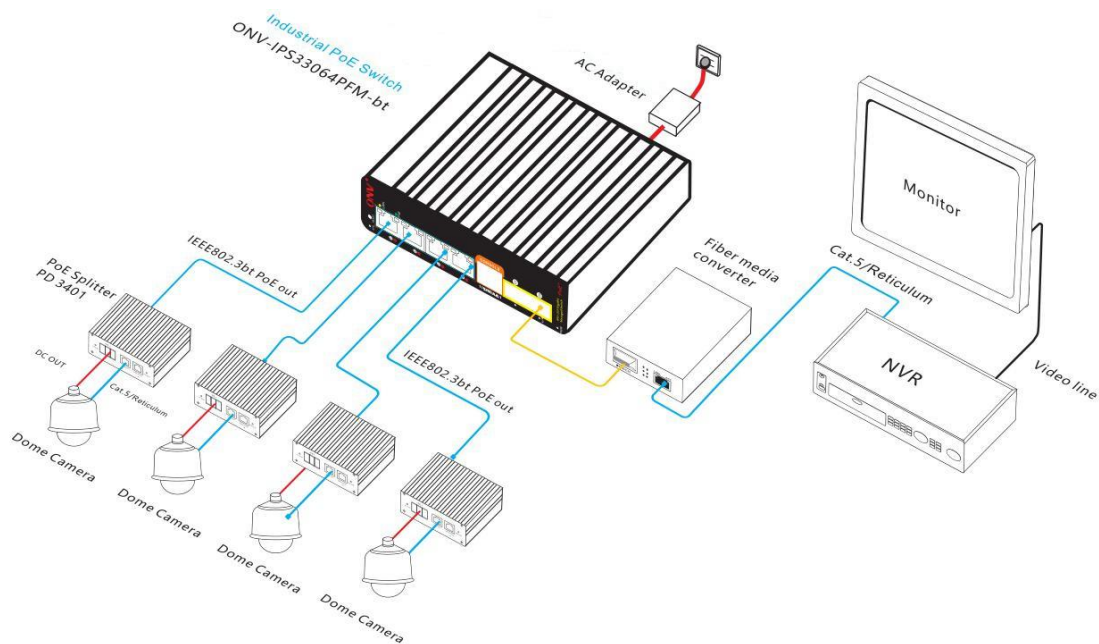

## ORDERING INFORMATION

Model	Description	Recommended Power Supply
ONV-IPS33064PF M-bt	L2+ managed bt industrial PoE switch with 4*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP ports. Port 1- 4 @bt PoE and backward compatible with IEEE802.3af/at. It can support dual DC power input and DIN rail mounting.	240W

**Note:** Industrial PoE switch does not match the SFP optical module and power supply.

## PACKING LIST

PACKING LIST	CONTENT	QTY	UNIT
	6-port full gigabit managed bt industrial PoE switch	1	SET
	RJ45-DB9 Line	1	PC
	User Guide	1	PC
	Warranty Card	1	PC

## OPTICAL MODULE INFORMATION

Product	Model	Description	Unit
1.25G Optical Module	ONV-2630	SFP optical module, 1.25G, multi mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2632	SFP optical module, 1.25G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2612-T	SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2613-R	SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2612-T-G	Industrial SFP optical module, 1.25G, single-mode	PC

		single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	
	2613-R-G	Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2612-T-S C	SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
	ONV-2613-R-S C	SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
Power Module	ONV-2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC

## POWER SUPPLY SELECTION TABLE

Product	Model	Description	Unit
240W DIN Rail Industrial Power Supply	GWS-DP240-48	Din Rail type 240W single set of output power supply; Input Voltage:AC 100V~240V 50-60Hz,3A Output Voltage:DC 48V 5A Operation Temperature:-40℃—+70℃	PC

480W DIN Rail Industrial Power Supply	GWS-DP480-48	Din Rail type 480W single set of output power supply; Input Voltage:AC 100V~240V 50-60Hz,5A Output Voltage:DC 48V 10A Operation Temperature:-40℃—+70℃	PC
---	--------------	--	----

## RELATED PRODUCT

Model	Description
ONV-IPS31064P-bt	Unmanaged bt industrial PoE switch with 6*10/100M RJ45 ports. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC power input and DIN rail mounting.
ONV-IPS31064PFG-bt	Unmanaged bt industrial PoE fiber switch with 4*10/100M RJ45 ports and 1*10/100/1000M uplink RJ45 port and 1*1000M uplink SFP port. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC power input and DIN rail mounting.
ONV-IPS31004PF-bt	Unmanaged bt industrial PoE fiber switch with 4*10/100M RJ45 ports and 1*155M uplink SC port. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC power input and DIN rail mounting.
ONV-IPS31064PF-bt	Unmanaged bt industrial PoE fiber switch with 4*10/100M RJ45 ports and 2*155M uplink SFP ports. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC power input and DIN rail mounting.
ONV-IPS33064P-bt	Unmanaged bt industrial PoE fiber switch with 6*10/100/1000M RJ45 ports. Port 1-4 can support 71W super high power out and

backward compatible with POE@IEEE802.3af/at. It can support dual DC power input and DIN rail mounting.

## CONTACT US



OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: [onv@onv.com.cn](mailto:onv@onv.com.cn)

Website: [www.onvcom.com](http://www.onvcom.com)

Zip: 518000

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen, China

Factory Address: The 4-6th Floor, No. 59, Huning Road, Xinwei Community, Dalang Street, Longhua District, Shenzhen, China

