

Product Datasheet

36-port 10G Uplink L3 Managed Ethernet Fiber Switch

(ONV38368FM)



OVERVIEW

The ONV38368FM is a 10G uplink L3 managed Ethernet fiber switch independently developed by ONV. It has 8*10/100/1000Base-T RJ45 ports and 24*100/1000Base-X SFP ports and 4*1/10G SFP+ fiber slot ports. Each port can support wire-speed forwarding.

The ONV38368FM has L3 network management function, support IPV4/IPV6 management, dynamic routing and forwarding, complete security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS(<20ms) to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application requirements, you can configure multiple application services such as port traffic control, VLAN division, and SNMP through the Web network management mode. It satisfies high-density network application environment and is suitable for medium, large-scale scenes such as hotel, campus, park, shopping mall, scenic spot, hospital, bank to form an economical, efficient and reliable communication network.

FEATURE

■ Gigabit multi fiber port access, 10G SFP+ fiber port uplink

- ◇ Supports Gigabit Ethernet port and gigabit SFP fiber slot port and 1/10G SFP+ fiber slot port combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.

■ Strong business processing capability

- ◇ IEEE802.1Q VLAN, flexible VLAN division, Voice VLAN and QinQ configuration.
- ◇ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including Equ, SP, WRR & SP+WRR.
- ◇ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.
- ◇ IGMP V1/V2 and IGMP Snooping.
- ◇ ERPS/STP/RSTP/MSTP.
- ◇ Static and dynamic aggregation.

■ Security

- ◇ 802.1X authentication.
- ◇ Port isolation, Storm control.
- ◇ IP-MAC-VLAN-Port binding.

■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ Low power consumption, galvanized steel casing, The fan active cooling.
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable power output.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR,

SYS, Link, L/A.

■ Easy operation and maintenance management

- ◇ HTTPS, SSLV3, and SSHV1/V2.
- ◇ RMON, system log, LLDP, and port traffic statistics.
- ◇ CPU monitoring, memory monitoring, Ping test, and cable diagnose.
- ◇ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).

TECHNICAL SPECIFICATION

| Model | ONV36368FM | ONV38368FM |
|----------------------------------|--|------------|
| Interface Characteristics | | |
| Fixed Port | 8*10/100/1000Base-T RJ45 ports (Data) 24*100/1000Base-X SFP ports (Data) 4*1/10G SFP+ fiber slot ports (Data) 1*Console RS232 port (115200,N,8,1) | |
| Ethernet Port | Port 1-8 support 10/100/1000Base-T, auto-sensing, Full/half duplex MDI/MDI-X self-adaption | |
| Twisted Pair Transmission | 10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter) | |
| Optical Fiber Port | 1/10G SFP+ optical fiber port, default no include optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC) | |
| Optical Fiber Port Expansion | Support Turbo overclocking 2.5G optical module expansion and ring network | |
| Optical Cable/ | Multi-mode: 850nm / 0~500M(1.25G), 0~300M(10G), | |


| | | |
|---------------------------|---|----|
| Distance | Single-mode: 1310nm / 0~ 40KM, 1550nm / 0~120KM. | |
| Chip Parameter | | |
| Network Management Type | L2+ | L3 |
| Network Protocol | IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X, IEEE802.3ae 10GBase-SR/LR, IEEE802.3x | |
| Forwarding Mode | Store and Forward(Full Wire Speed) | |
| Switching Capacity | 598Gbps | |
| Forwarding Rate@64byte | 107.14Mpps | |
| MAC | 32K | |
| Buffer Memory | 32M | |
| Jumbo Frame | 9.6K | |
| CPU(Hz) | 500M | |
| DRAM | 2G | |
| Flash | 128M | |
| LED Indicator | Power: PWR (Yellow), System: SYS(Yellow), Network: Link (Yellow), Fiber port: L/A (Green) | |
| Reset Switch | Yes, press and hold the switch for 10 seconds and release it to restore the factory settings | |
| Power Supply | | |
| Total PWR / Input Voltage | 60W/(AC100-240V) | |
| Power Consumption | Standby<20W, Full Load<45W | |
| Power Supply | Built-in power supply, AC 100~240V 50-60Hz 1.0A | |
| Physical Parameter | | |
| Operation TEMP / | -20~+55°C, 5%~90% RH Non condensing | |

| | | | | | | | | | | | | | |
|---|---|------------------------|-------------------------|------------------------------------|-----------------------------------|---|------------------------------------|---|---|--|--|--|---|
| Humidity | | | | | | | | | | | | | |
| Storage TEMP / Humidity | -40~+80°C, 5%~95% RH Non condensing | | | | | | | | | | | | |
| Dimension (L*W*H) | 440*290*44.5mm | | | | | | | | | | | | |
| Net /Gross Weight | <3.5kg / <4.3kg | | | | | | | | | | | | |
| Installation | Desktop, 19 inch 1U cabinet installation | | | | | | | | | | | | |
| Certification & Warranty | | | | | | | | | | | | | |
| Lightning Protection | Lightning protection: 4KV 8/20us, Protection level: IP30 | | | | | | | | | | | | |
| Certification | CCC, CE mark, commercial, CE/LVD EN60950, FCC Part 15 Class B, RoHS | | | | | | | | | | | | |
| Warranty | 3 years, lifelong maintenance. | | | | | | | | | | | | |
| Network Management Features | | | | | | | | | | | | | |
| Interface | IEEE802.3X (Full-duplex) Port temperature protection setting No connection port automatic sleep Port green Ethernet Energy-saving setting Broadcast storm control based on port speed SFP+ optical port DDMI real-time digital diagnosis The speed limit of the message flow in the access port, minimum particle size is 64Kbps. | | | | | | | | | | | | |
| Layer 3 Features | <table border="0"> <tr> <td>L2+ network management</td> <td>IPV4 Equal Cost Routing</td> </tr> <tr> <td>ARP protocol, maximum 1024 entries</td> <td>NG protocol, maximum 1000 entries</td> </tr> <tr> <td>IPV4/IPV6 static route/default route supports up to 128 entries</td> <td>ARP protocol, maximum 1000 entries</td> </tr> <tr> <td>Layer 3 routing and forwarding, support communication between</td> <td>Pingv6, Telnetv6, TFTPv6, DNSv6, ICMPv6</td> </tr> <tr> <td></td> <td>IPV4/IPV6 VRRP, the maximum group is 255</td> </tr> <tr> <td></td> <td>IPV4/IPV6 VLANIF interface supports up to 128</td> </tr> </table> | L2+ network management | IPV4 Equal Cost Routing | ARP protocol, maximum 1024 entries | NG protocol, maximum 1000 entries | IPV4/IPV6 static route/default route supports up to 128 entries | ARP protocol, maximum 1000 entries | Layer 3 routing and forwarding, support communication between | Pingv6, Telnetv6, TFTPv6, DNSv6, ICMPv6 | | IPV4/IPV6 VRRP, the maximum group is 255 | | IPV4/IPV6 VLANIF interface supports up to 128 |
| L2+ network management | IPV4 Equal Cost Routing | | | | | | | | | | | | |
| ARP protocol, maximum 1024 entries | NG protocol, maximum 1000 entries | | | | | | | | | | | | |
| IPV4/IPV6 static route/default route supports up to 128 entries | ARP protocol, maximum 1000 entries | | | | | | | | | | | | |
| Layer 3 routing and forwarding, support communication between | Pingv6, Telnetv6, TFTPv6, DNSv6, ICMPv6 | | | | | | | | | | | | |
| | IPV4/IPV6 VRRP, the maximum group is 255 | | | | | | | | | | | | |
| | IPV4/IPV6 VLANIF interface supports up to 128 | | | | | | | | | | | | |

| | | |
|------------------|---|---|
| | different network segments and different VLANs | <p>IPV4/IPV6 static route/default route supports up to 128 entries</p> <p>L3 network management function, IPV4/IPV6 dual-stack management</p> <p>IPV4 dynamic routing, RIPv1/v2, OSPFv2, BGP4+, 4000 routing entries</p> <p>IPV6 dynamic routing OSPFv3, BGP+, RIPv6, IPV6 management, 1000 routing entries</p> <p>Layer 3 routing and forwarding, support communication between different network segments and different VLANs</p> |
| VLAN | <p>Voice VLAN, QinQ configuration, IEEE802.1q</p> <p>VLAN based on MAC, VLAN based on the protocol</p> <p>4K VLAN based on port, Port configuration of Access, Trunk, Hybrid</p> | |
| Port Aggregation | <p>LACP, Static aggregation</p> <p>Max 18 aggregation groups and 8 ports per group.</p> | |
| Spanning Tree | STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s) | |
| Industrial Ring | G.8032 (ERPS), Recovery time less than 20ms | |
| Network Protocol | 250 Ring at most, Max 250 devices per ring. | |
| Multicast | <p>MLD Snooping v1/v2, Multicast VLAN</p> <p>IGMP Snooping v1/v2, Max 1024 multicast groups, Fast log out</p> | |
| Port Mirroring | Bidirectional data mirroring based on port | |
| QoS | <p>Flow-based Rate Limiting</p> <p>Flow-based Packet Filtering</p> <p>8*Output queues of each port</p> <p>802.1p/DSCP priority mapping</p> <p>Diff-Serv QoS, Priority Mark/Remark</p> <p>Queue Scheduling Algorithm (SP, WRR, SP+WRR)</p> | |


| | |
|------------|---|
| ACL | <p>Port-based Issuing ACL, ACL based on port and VLAN</p> <p>L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc.</p> |
| Security | <p>IP-MAC-VLAN-Port binding</p> <p>ARP inspection, Anti-DoS attack</p> <p>AAA & RADIUS, MAC learning limit</p> <p>Mac black holes, IP source protection</p> <p>IEEE802.1X & MAC address authentication</p> <p>Broadcast storm control, Backup for host datum</p> <p>SSH 2.0, SSL, Port isolation, ARP message speed limit</p> <p>User hierarchical management and password protection</p> |
| DHCP | DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay |
| Management | <p>CPU instant utilization status view</p> <p>Console/AUX Modem/Telnet/SSH2.0 CLI</p> <p>One-key recovery, Cable Diagnose, LLDP</p> <p>Web Management (HTTPS), NTP, System work log, Ping Test</p> <p>ONV NMS- Smart Network Management System Platform (LLDP+SNMP)</p> <p>Download & Management on FTP, TFTP, Xmodem, SFTP, SNMP</p> <p>V1/V2C/V3</p> |
| System | <p>Category 5 Ethernet network cable</p> <p>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer 10 or later;</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network</p> |

DIMENSION

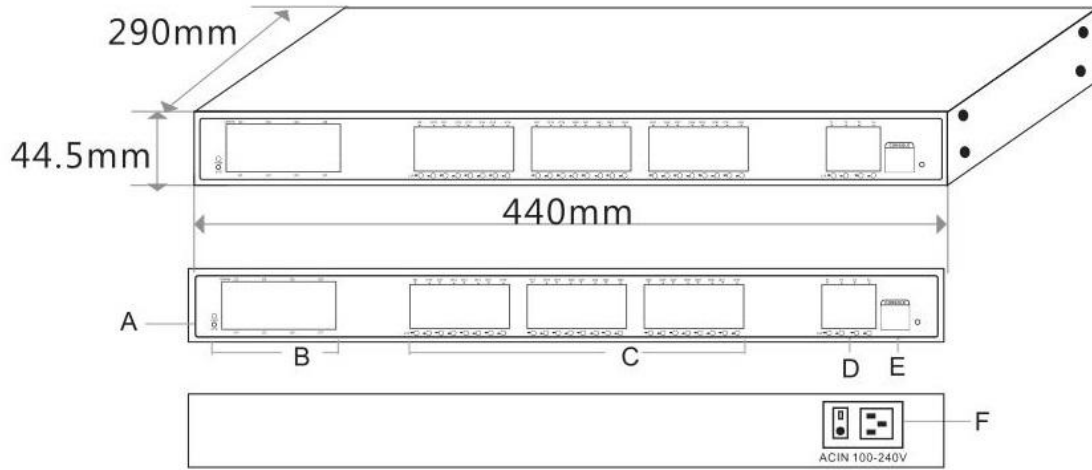

- | | |
|---------------------------|---|
| A. Working indicate | B. 8*10/100/1000M RJ45 ports |
| C. 24*100/1000M SFP ports | D. 4*10G SFP+ ports |
| E. Console port | F. Power input port AC100-240V, 50/60Hz |

APPLICATION

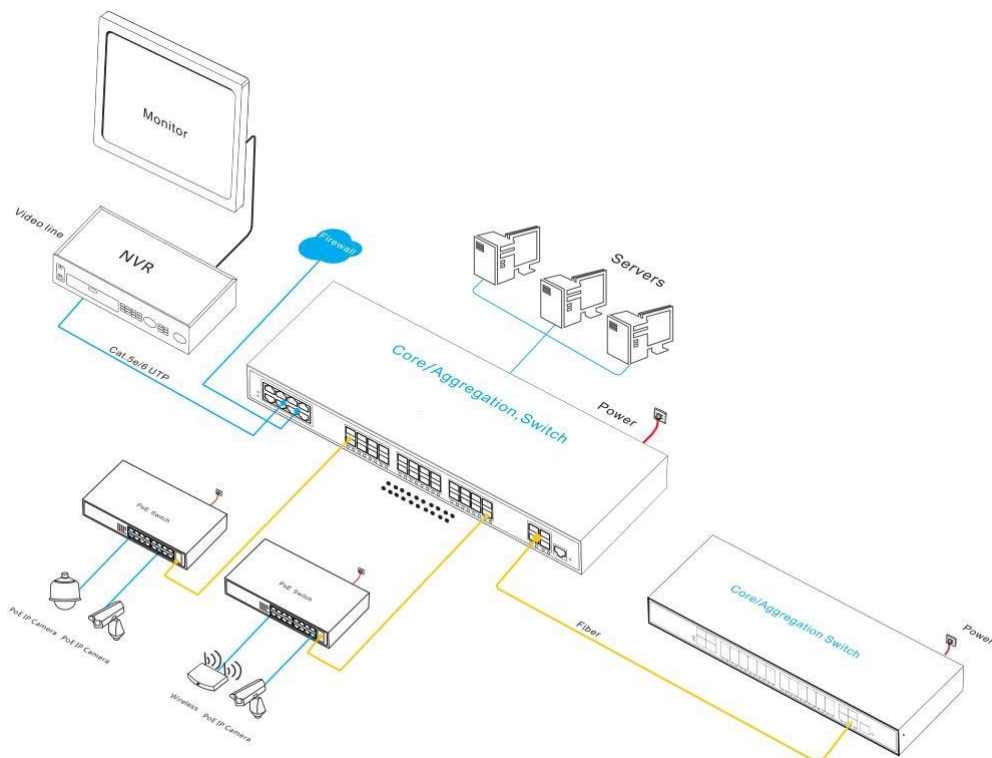

ORDERING INFORMATION

| Model | Description | Built-in Power Supply |
|------------|---|-----------------------|
| ONV36368FM | L2+ managed Ethernet aggregation /core fiber switch with 8*10/100/1000M RJ45 ports and 24*100/1000M SFP ports and 4*1/10G SFP+ fiber ports. Support 1U/19 inch rack installation. | 60W |
| ONV38368FM | L3 managed Ethernet aggregation /core fiber switch with 8*10/100/1000M RJ45 ports and 24*100/1000M SFP ports and 4*1/10G SFP+ fiber ports. Support 1U/19 inch rack installation. | 60W |

Note: The SFP optical module is not included by default and needs to be purchased separately.

PACKING LIST

| | CONTENT | QTY | UNIT |
|--------------|---|-----|------|
| PACKING LIST | 36-port 10G uplink L3 managed Ethernet fiber switch | 1 | SET |
| | AC Power Cable | 1 | PC |
| | RJ45-DB9 Line | 1 | PC |
| | Mounting Kits(Hanging Ear) | 1 | SET |
| | User Guide | 1 | PC |
| | Warranty Card | 1 | PC |

OPTICAL MODULE INFORMATION

| Product | Model | Description | Unit |
|----------------------------|-----------|--|------|
| 1.25G Optical Module | 2630 | SFP optical module, 1.25G, multi mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull. | PC |
| | 2632 | SFP optical module, 1.25G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | 2612-T | SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | 2613-R | SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | 2612-T-SC | SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull. | PC |
| | 2613-R-SC | SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull. | PC |
| Power Module | 2633 | 1.25G SFP optical module transfers to 10/100/1000M RJ45 port. | PC |
| 10G Optical Module | 6630 | SFP+ optical module, 10G Multi-mode dual fiber 850nm, transmission distance: 300m, LC interface, support DDM function, support hot plug and pull. | PC |
| | 7832 | SFP+ optical module, 10G Single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM | PC |

| | | | |
|--|---------|---|----|
| | | function, support hot plug and pull. | |
| | 7832-33 | SFP+ optical module, 10G Single-mode single fiber TX1330nm/RX1270nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | 7832-27 | SFP+ optical module, 10G Single-mode single fiber TX1270nm/RX13300nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |

RELATED PRODUCT

| Model | Description |
|------------|---|
| ONV38168FM | L3 managed Ethernet aggregation fiber switch with 12*10/100/1000M RJ45 ports and 4*1/10G SFP+ fiber ports. Built-in 30W power supply. Support 1U/19 inch rack installation. |
| ONV38028FM | L3 managed Ethernet aggregation fiber switch with 24*10/100/1000M RJ45 ports and 4*1/10G SFP+ fiber ports. Built-in 60W power supply. Support 1U/19 inch rack installation. |
| ONV38036FM | L3 managed Ethernet aggregation fiber switch with 24*10/100/1000M RJ45 ports and 8* 100/1000M SFP fiber ports and 4*1/10G SFP+ fiber ports. Built-in 60W power supply. Support 1U/19 inch rack installation. |
| ONV38448FM | L3 managed Ethernet aggregation fiber switch with 12*10/100/1000M RJ45 ports and 28* 100/1000M SFP fiber ports and 4*1/10G SFP+ fiber ports. Built-in 60W power supply. Support 1U/19 inch rack installation. |
| ONV38048FM | L3 managed Ethernet aggregation fiber switch with 48*10/100/1000M RJ45 ports and 4*1/10G SFP+ fiber ports. Built-in 60W power supply. Support 1U/19 inch rack installation. |

CONTACT US

ONV OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Website: www.onvcom.com

Email/Skype/WeChat ID: onv@onv.com.cn

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen,
China

Factory Address: The 4-6th Floor, No. 59, Huaning Road, Xinwei Community, Dalang
Street, Longhua District, Shenzhen, China

