

## Product Datasheet

# 52-port 10G Uplink L3 Managed Industrial Ethernet Switch

(ONV-IPS38048FM)



## OVERVIEW

The ONV-IPS38048FM is a 10G uplink L3 managed industrial Ethernet switch independently developed by ONV. It has 48\*10/100/1000Base-T RJ45 ports and 4\*1/10G SFP+ fiber slot ports. Each port can support wire-speed forwarding.

The ONV-IPS38048FM has L3 network management function, supports IPV4/IPV6 management, dynamic routing full line-speed forwarding, complete security protection mechanism, perfect ACL/QoS policy, and rich VLAN functions, easy to manage and maintain. With industry-leading ring network technology. It supports a variety of industrial-grade redundant ring network protocols, and each port can form a ring network, supporting chain ring network, starring network, double starring network, ring network, tangent network ring network, intersecting ring network, coupled ring network, self-healing within 20ms of the ring network. The switches series has high reliability, high security, and high manageability, ensures reliable transmission of key data, supports remote management, and cooperates with the ONV-NMS network management platform for

cluster management to achieve no blind spot network management throughout the process. The product completely follows the industrial product design and materials. The shell is made of metal material to enhance heat dissipation. It has excellent adaptability to the industrial site environment (including mechanical stability, climate environment adaptability, electromagnetic environment adaptability, etc.). Protection level reaches IP40 and supports 2AC+DC dual redundant power supply, and the MTBF can up to 35 years, 5 years warranty. It is suitable for intelligent transportation, rail transit, power industry, mining, petroleum, and industrial scenes such as shipping, metallurgy, and green energy construction form a cost-effective, stable, and reliable communication network.

## FEATURE

### ■ Gigabit wire speed access, 10G uplink

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit Ethernet port and 10G uplink SFP+ port to meet the networking requirements of various scenarios.

### ■ Security

- ◇ 802.1X authentication.
- ◇ Port isolation, Storm control.
- ◇ IP-MAC-VLAN-Port binding.

### ■ Strong business processing capability

- ◇ ERPS/STP/RSTP/MSTP.
- ◇ Static and dynamic aggregation.
- ◇ IGMP V1/V2 and IGMP Snooping.
- ◇ IEEE802.1Q VLAN, flexible VLAN division, Voice VLAN, and QinQ configuration.

- ◇ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including EQU, SP, WRR & SP+WRR.
- ◇ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.

#### ■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ Low power consumption, No fan, galvanized steel case.
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable power output.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link.

#### ■ Easy operation and maintenance management

- ◇ HTTPS, SSLV3, and SSHV1/V2.
- ◇ RMON, system log, LLDP, and port traffic statistics.
- ◇ CPU monitoring, memory monitoring, Ping test, and cable diagnose.
- ◇ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).

## TECHNICAL SPECIFICATION

Model	ONV-IPS36048FM	ONV-IPS38048FM
<b>Interface Characteristics</b>		
Fixed Port	2*AC100-240V input ports Alarm switch port (FAULT) 1*Console port (115200, N, 8,1) 4*1/10G uplink SFP+ ports (Data) 48*10/100/1000Base-T RJ45 ports (Data)	

	1 group of DC12-48V input ports (Support reverse polarity protection function)	
Ethernet Port	Port 1-48 support 10/100/1000Base-T(x) auto-sensing, Full/half duplex MDI/MDI-X self-adaption	
Optical Fiber Port	1/10G SFP+ optical fiber port, default no include optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)	
SFP Port Expansion	Turbo overclocking 2.5G optical module and ring	
Optical Cable/ Distance	Multi-mode: 850nm / 0-500M, 0-300M(10G), Single-mode: 1310nm / 0-40KM, 1550nm / 0-120KM.	
<b>Chip Parameter</b>		
Network Management Type	L2+	L3
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X, IEEE802.3ae 10GBase-LR/SR, IEEE802.3x	
Forwarding Mode	Store and Forward(Full Wire Speed)	
Switching Capacity	598Gbps	
Forwarding Rate@64byte	131Mpps	
CPU	500MHz	
DRAM	4G	
FLASH	256M	
MAC	32K	
Buffer Memory	32M	

Jumbo Frame	9.6K
LED Indicator	Power: PWR (Yellow), System:SYS (Yellow), Network: Link (Yellow), Fiber port: L/A (Green)
Reset Switch	Yes, Press and hold the reset switch for 10s and release it to restore the factory settings
<b>Power</b>	
Total PWR / Input Voltage	60W (AC100-240V)
Power Consumption	Standby:<30W, Full load:<50W
Power Input Interface	Built-in power supply, AC 100~240V 50-60Hz 0.65A
Power Supply	1 group of DC12-48V input port, Alarm switch port, 2 group of AC power input ports  Dual input power port design: AC power supply priority, support anti-reverse protection, power-off automatic switching DC connection.
<b>Physical Parameter</b>	
Operation TEMP / Humidity	-40~+80°C, 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+85°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*298*44mm
Net /Gross Weight	<5.0kg / <5.8kg
Installation	Desktop, 19 inch 1U cabinet
<b>Certification &amp; Warranty</b>	
Lightning Protection	Lightning protection: 6KV 8/20us; Protection level: IP40 IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge IEC61000-4-3(RS):10V/m(80~1000MHz) IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz)

	<p>IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s</p> <p>IEC61000-4-9(pulsed magnet field):1000A/m</p> <p>IEC61000-4-10(damped oscillation):30A/m 1MHz</p> <p>IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV</p> <p>IEC61000-4-16(common-mode transmission):30V; 300V,1s</p> <p>FCC Part 15/CISPR22(EN55022):Class A</p> <p>IEC61000-6-2(Common Industrial Standard)</p>
Mechanical Properties	<p>IEC60068-2-6 (anti vibration)</p> <p>IEC60068-2-27 (anti shock)</p> <p>IEC60068-2-32 (free fall)</p>
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	5 years, lifelong maintenance.

### Network Management Features

Interface	<p>IEEE802.3X (Full-duplex)</p> <p>Port temperature protection setting</p> <p>No connection port automatic sleep</p> <p>Port green Ethernet Energy-saving setting</p> <p>Broadcast storm control based on port speed</p> <p>SFP+ optical port DDMI real-time digital diagnosis</p> <p>The speed limit of the message flow in the access port, minimum particle size is 64Kbps.</p>	
Layer 3 Features	<p>L2+ network management</p> <p>ARP protocol, maximum 1024 entries</p> <p>IPV4/IPV6 static route/default route supports up to 128 entries</p> <p>Layer 3 routing and forwarding,</p>	<p>IPV4 Equal Cost Routing</p> <p>NG protocol, maximum 1000 entries</p> <p>ARP protocol, maximum 1000 entries</p> <p>Pingv6, Telnetv6, TFTPv6,</p>


	support communication between different network segments and different VLANs	<p>DNSv6, ICMPv6</p> <p>IPV4/IPV6 VRRP, the maximum group is 255</p> <p>IPV4/IPV6 VLANIF interface supports up to 128</p> <p>IPV4/IPV6 static route/default route supports up to 128 entries</p> <p>L3 network management function, IPV4/IPV6 dual-stack management</p> <p>IPV4 dynamic routing, RIPv1/v2, OSPFv2, BGP4+, 4000 routing entries</p> <p>IPV6 dynamic routing OSPFv3, BGP+, RIPv6, IPV6 management, 1000 routing entries</p> <p>Layer 3 routing and forwarding, support communication between different network segments and different VLANs</p>
VLAN	<p>Voice VLAN, QinQ configuration, IEEE802.1q</p> <p>VLAN based on MAC, VLAN based on the protocol</p> <p>4K VLAN based on port, Port configuration of Access, Trunk, Hybrid.</p>	
Port Aggregation	<p>LACP, Static aggregation</p> <p>Max 26 aggregation groups and 8 ports per group.</p>	
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)	
Industrial Ring	G.8032 (ERPS), Recovery time less than 20ms	
Network Protocol	250 Ring at most, Max 250 devices per ring.	
Multicast	MLD Snooping v1/v2, Multicast VLAN	

	IGMP Snooping v1/v2, Max 1024 multicast groups, Fast log out
Port Mirroring	Bidirectional data mirroring based on port
QoS	Flow-based Rate Limiting Flow-based Packet Filtering 8*Output queues of each port 802.1p/DSCP priority mapping Diff-Serv QoS, Priority Mark/Remark Queue Scheduling Algorithm (SP, WRR, SP+WRR)
ACL	Port-based Issuing ACL, ACL based on port and VLAN L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc.
Security	IP-MAC-VLAN-Port binding ARP inspection, Anti-DoS attack AAA & RADIUS, MAC learning limit Mac black holes, IP source protection IEEE802.1X & MAC address authentication Broadcast storm control, Backup for host datum SSH 2.0, SSL, Port isolation, ARP message speed limit User hierarchical management and password protection
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	CPU instant utilization status view Console/AUX Modem/Telnet/SSH2.0 CLI One-key recovery, Cable Diagnose, LLDP Web Management (HTTPS), NTP, System work log, Ping Test ONV NMS- Smart Network Management System Platform (LLDP+SNMP) Download & Management on FTP, TFTP, Xmodem, SFTP, SNMP V1/V2C/V3




System	<p>Category 5 Ethernet network cable</p> <p>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later;</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network</p>
--------	---

## DIMENSION

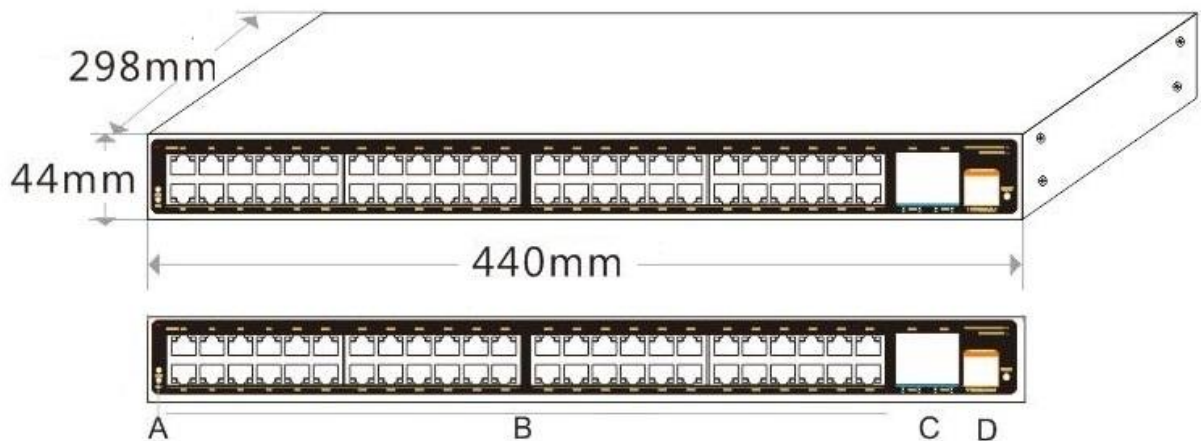

- A. Working indicator      B. 48\*10/100/1000M RJ45 ports
- C. 4\*1/10G SFP+ ports      D. Console port

## APPLICATION

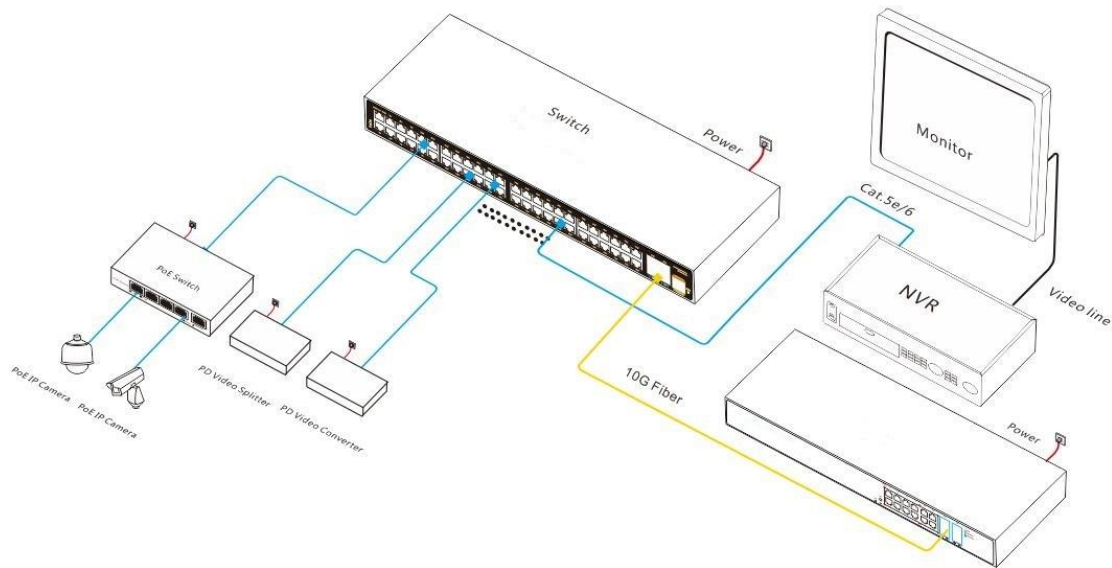

## ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV-IPS36048FM	L2+ managed industrial Ethernet fiber switch with 48*10/100/1000M RJ45 ports and 4*1/10G SFP+ ports. Built-in redundant dual power supply. Support 2AC+DC power terminal input and 1U/19-inch cabinet installation.	2*60W
ONV-IPS38048FM	L3 managed industrial Ethernet fiber switch with 48*10/100/1000M RJ45 ports and 4*1/10G SFP+ ports. Built-in redundant dual power supply. Support 2AC+DC power terminal input and 1U/19-inch cabinet installation.	2*60W

**Note:** The SFP optical module is not included by default and needs to be purchased separately.

## PACKING LIST

Packing List	CONTENT	QTY	UNIT
	52-port 10G uplink L3 managed industrial Ethernet switch	1	SET
	AC Power Cable	1	PC
	Mounting Kits	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

## OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G, multi-mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull.	PC
	2632-G	Industrial SFP optical module, 1.25G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2612-T-G	Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2613-R-G	Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2612-T-G-SC	Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
	2613-R-G-SC	Industrial SFP optical module, 1.25G, single-mode single fiber	PC

		TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	
10G Optical Module	6630-G	Industrial SFP+ optical module, 10G, Multi-mode dual fiber 850nm, transmission distance: 300m, LC interface, support DDM function, support hot plug and pull.	PC
	7832-G	Industrial SFP+ optical module, 10G, Single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	7832-33-G	Industrial SFP+ optical module, 10G, Single-mode single fiber TX1330nm/RX1270nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	7832-27-G	Industrial SFP+ optical module, 10G, Single-mode single fiber TX1270nm/RX13300nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC

## RELATED PRODUCT

Model	Description
ONV-IPS33018FM	L2+ managed industrial Ethernet fiber switch with 16*10/100/1000M RJ45 ports and 2*100/1000M SFP ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.
ONV-IPS33026FM	L2+ managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 2*100/1000M SFP ports (Combo port). Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.
ONV-IPS38028FM	L3 managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 4*1/10G SFP+ ports. Built-in redundant dual power

	supply. support 1U/19-inch cabinet installation and 2AC+DC power terminal input (Phoenix terminal connection).
ONV-IPS38036FM	L3 managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 8*100/1000M SFP ports and 4*1/10G SFP+ ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.
ONV-IPS38368FM	L3 managed industrial Ethernet fiber switch with 8*10/100/1000M RJ45 ports and 24*100/1000M SFP ports and 4*1/10G SFP+ ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.
ONV-IPS38448FM	L3 managed industrial Ethernet fiber switch with 12*10/100/1000M RJ45 ports and 28*100/1000M SFP ports and 4*1/10G SFP+ ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.

## CONTACT US

**ONV** OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT

Email: [onv@onv.com.cn](mailto:onv@onv.com.cn)

Skype: [onv@onv.com.cn](https://www.skype.com/people/onv@onv.com.cn)

Website: [www.onvcom.com](http://www.onvcom.com)

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: The 4-6th Floor, No. 59, Huaning Road, Xinwei Community, Dalang

Street, Longhua District, Shenzhen

