

## Product Datasheet

# 27-port Gigabit Uplink Non-standard PoE Switch

(ONV-H2024PFG-YS)



## OVERVIEW

The ONV-H2024PFG-YS is a gigabit uplink non-standard PoE fiber switch independently developed by ONV. It has 24\*10/100M RJ45 ports and 2\*10/100/1000M uplink RJ45 ports and 1\*1000M uplink SFP fiber port. Port 1-24 can support 24V non-standard PoE+ power supply and single-port PoE power up to 18W. As a non-standard PoE power supply device, it must be connected to the corresponding non-standard electrical equipment (such as wireless bridge, building visual intercom, etc.) or the non-standard PoE splitter to convert, and then achieve the PoE power supply. It can supply power to various adaptable terminals through network cables to meet the demand for a high-density PoE power supply network environment. It is suitable for hotels, campuses, factory dormitories, and small and medium-sized enterprises to establish cost-effective networks. Unmanaged mode, plug and play, no configuration, easy to use.

## FEATURE

### ■ 10/100M access, gigabit uplink RJ45 and SFP port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Provides 10/100M RJ45 port and Gigabit RJ45 and SFP port, which is more convenient for users to flexibly set up to meet the network requirements of various scenarios.

### ■ Smart PoE power supply

- ◇ The PoE port has a short-circuit protection function to prevent accidental contact and short-circuit burns.
- ◇ Quickly implement PoE network cable power supply through the switch to directly connect non-standard electrical equipment or the switch and non-standard PoE splitter cable.
- ◇ 24\*10/100Base-TX RJ45 ports can support 24V PoE power supply meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- ◇ (8 ports in a group, each group has 4 ports at the end) The 12 ports have a delayed start function, which can avoid power overload protection caused by overload at the moment of power-on.

### ■ Stable and reliable, easy to use


- ◇ CCC, CE, FCC, RoHS.
- ◇ Plug and play, no configuration, simple and convenient.
- ◇ The user-friendly pane can show the device status through the LED indicator of PWR and PoE.
- ◇ Low power consumption, galvanized steel casing, and excellent heat dissipation ensure the stable operation of the switch.
- ◇ Long-distance mode (250m): Turn the switch to ON (default off), and the rate of ports 17-24 is reduced to 10M/250 meters it can also solve the problem of poor transmission caused by aging lines.

## TECHNICAL SPECIFICATION


Model	ONV-H2016PFG-YS	ONV-H2024PFG-YS
<b>Interface Characteristics</b>		
Fixed Port	16*10/100Base-TX PoE ports (Data/Power) 2*10/100/1000Base-T uplink RJ45 ports (Data) 1*1000Base-X uplink SFP fiber port (Data)	24*10/100Base-TX PoE ports (Data/Power) 2*10/100/1000Base-T uplink RJ45 ports (Data) 1*1000Base-X uplink SFP fiber port (Data)
Ethernet Port	Port 1-16/ 1-24 can support 10/100Base-T(X) and port 17-18/ 25-26 can support 100/1000Base-T(X) auto-sensing, full/ half duplex MDI/ MDI-X self-adaption	
Twisted Pair Transmission	10BASE-TX : Cat5 or later UTP (≤250 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T :Cat5e or later UTP (≤100 meters)	
Optical Fiber Port	Gigabit optical fiber port, default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC/SC)	
Optical Cable/ Distance	Multi-mode: 850nm/ 0-500m Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km	
Functional Switch	Port 9-16/ 17-24 can support 10M/250 meters transmission when the functional switch is on 250m.	
<b>Chip Parameter</b>		
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x	
Forwarding Mode	Store and Forward (Full Wire Speed)	
Switching Capacity	9.2Gbps (Non-blocking)	10.8Gbps (Non-blocking)
Forwarding Rate@64byte	6.84Mpps	8.04Mpps

MAC	2K	
Buffer Memory	2.75M	
Jumbo Frame	9216B	
LED Indicator	Power: PWR (Green), Network: Link (Green), PoE: PoE(Red), Fiber port: L/A (Green), Functional switch: 100m/250m (Green)	
<b>PoE &amp; Power Supply</b>		
PoE Port	Port 1-16	Port 1-24
Power Supply Pin	4/5(+) 7/8(-)	
Max Single Port PoE Power	18W, non-standard PoE+	
Total PWR / Input Voltage	250W /(AC100-240V)	
Power Consumption	Standby<5W, Full Load<250W	Standby<8W, Full Load<250W
Power Supply	Built-in power supply, AC100~240V 50-60Hz, 4.1A	
<b>Physical Parameter</b>		
Operation TEMP / Humidity	-20°C~+55°C, 5%~90% RH Non condensing	
Storage TEMP / Humidity	-40°C~+80°C, 5%~95% RH Non condensing	
Dimension (L*W*H)	350*215*44mm	
Net /Gross Weight	1.9kg / 2.45kg	
Installation	Desktop, Rack mounted	
<b>Certification &amp; Warranty</b>		
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30	
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS	
Warranty	1 year, lifelong maintenance.	

## DIMENSION

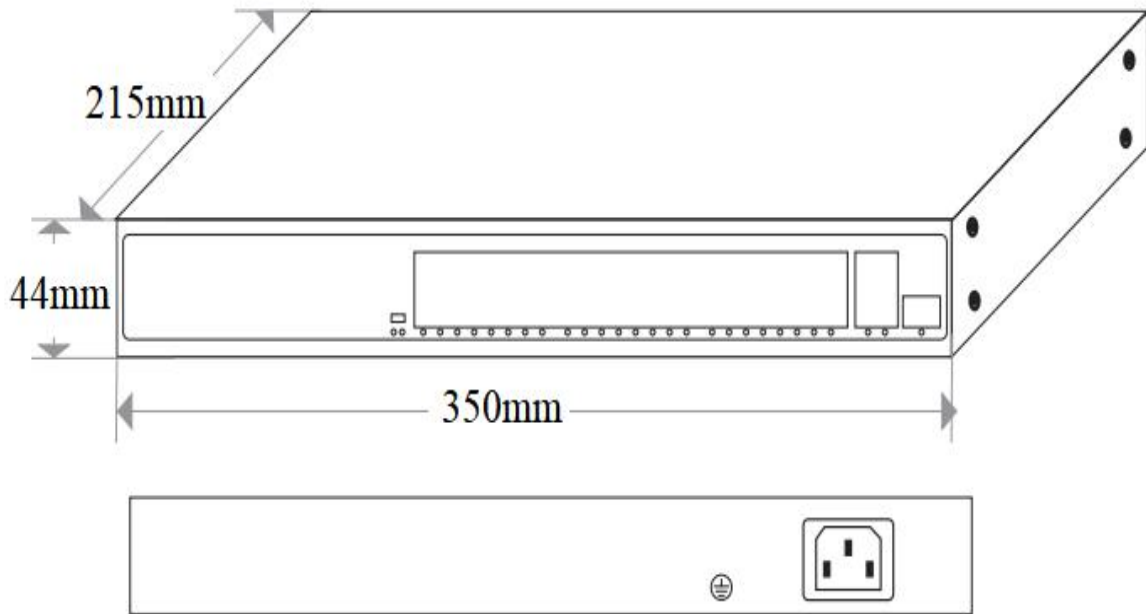

## APPLICATION

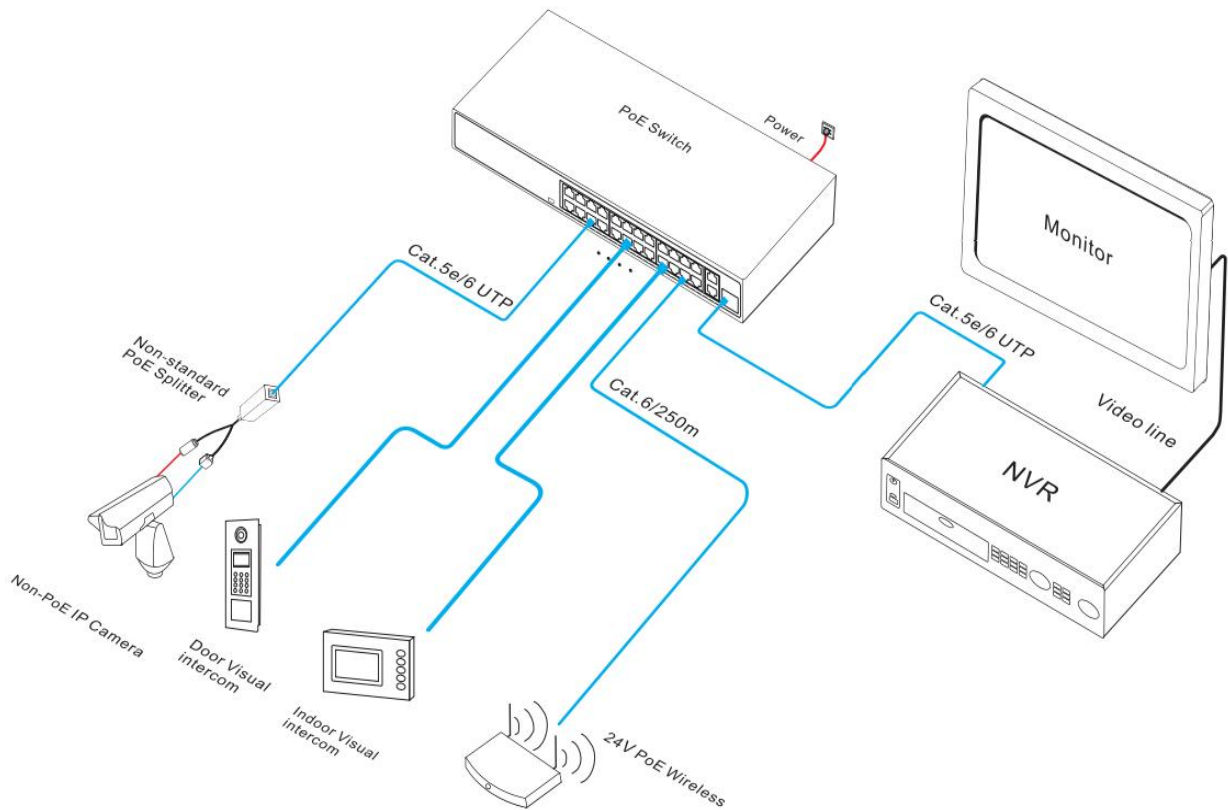

## ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV-H2016PFG-YS	Unmanaged PoE switch with 16*10/100M RJ45 ports and 2*10/100/1000M uplink RJ45 ports and 1*1000M uplink SFP fiber port. Port 1-16 support 24V non-standard PoE+ power supply. Port 9-16 can support 10M/250 meters transmission when the functional switch is on 250m.	24V/250W
ONV-H2024PFG-YS	Unmanaged PoE switch with 24*10/100M RJ45 ports and 2*10/100/1000M uplink RJ45 ports and 1*1000M uplink SFP fiber port. Port 1-24 support 24V non-standard PoE+ power supply. Port 17-24 can support 10M/250 meters transmission when the functional switch is on 250m.	24V/250W

**Note:** The optical module is not included and needs to be purchased.

## PACKING LIST

	Content	Qty	Unit
Packing List	27-port gigabit uplink non-standard PoE fiber switch	1	PC
	AC Power Cable	1	PC
	User Guide	1	PC
	Warranty Card	1	PC

## OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630	SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. supports DDM function and hot plugging.	PC

2632	SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
2612-T	SFP optical module, 1.25G single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
2613-R	SFP optical module, 1.25G single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
2612-T-SC	SFP optical module, 1.25G single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC
2613-R-SC	SFP optical module, 1.25G single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC

## CONTACT US



**Optical Network Video Technologies (Shenzhen) Co., Ltd.**

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Skype: onv@onv.com.cn

WeChat ID: ONV-PoE-IoT

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333, Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou