

## Product Datasheet

# 26-port Full Gigabit L2+ Managed Ethernet Fiber Switch (ONV33026FM)



## OVERVIEW

The ONV33026FM is a full gigabit L2+ managed Ethernet fiber switch independently developed by ONV. It has 24\*10/100/1000Base-T adaptive RJ45 ports and 4\*100/1000Base-X uplink SFP fiber (including 2 combo ports). Each port can support wire-speed forwarding.

The ONV33026FM has L2+ full network management function, supports IPV4/IPV6 management, static route forwarding, complete security protection mechanism, complete ACL/QoS policy, and rich VLAN functions for easy management and maintenance. It supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS (<20ms) to improve link backup and network reliability, and can quickly recover when a one-way network failure occurs communication ensures uninterrupted communication for important applications. Port management, routing address management, port flow control, VLAN division, IGMP, security policy, and other application business configurations are performed according to application needs through network management methods such as Web, CLI, SNMP, and Telnet. It meets high-density network application environments and is suitable for establishing economical, efficient, and reliable communication networks in medium and large-scale scenarios such as hotels, campuses, parks, supermarkets, scenic spots, hospitals, and banks.

## FEATURE

- Gigabit access, uplink SFP fiber port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.
- ◇ Support Gigabit rj45 port and Gigabit SFP port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

### ■ Strong business processing ability

- ◇ Support ERPS ring network and STP/ RSTP/ MSTP to eliminate layer 2 loops and realize link backup.
- ◇ Support IEEE802.1Q VLAN, Users can flexibly divide VLAN, Voice VLAN, and QinQ configuration according to their needs.
- ◇ Support static and dynamic aggregation to effectively increase link bandwidth, realize load balancing, link backup, and improve link reliability.
- ◇ Support QoS, port-based, 802.1P-based, and DSCP-based three priority modes and four queue scheduling algorithms: Equ, SP, WRR, and SP+WRR.
- ◇ Support ACL to filter data packets by configuring matching rule processing operations and time permissions, and provide flexible security access control policies.
- ◇ Support IGMP V1/V2/V3 multicast protocol, IGMP Snooping meets multi-terminal high-definition video surveillance and video conference access requirements.

### ■ Security

- ◇ Port isolation and storm control.
- ◇ IP+MAC+port+VLAN quadruple flexible combination binding function.
- ◇ 802.1X authentication provides authentication functions for LAN computers and controls the authorization status of controlled ports according to the authentication results.

### ■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ Low power consumption, with fan, galvanized steel metal shell, and excellent heat dissipation to ensure the stable operation of the switch.
- ◇ Self-developed power supply, high redundancy, providing a long term and stable power output.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, SYS,

Link, and L/A.

### ■ Easy O&M management

- ◇ Support CPU monitoring, memory monitoring, Ping detection, and cable length detection.
- ◇ HTTPS, SSLV3, SSHV1/V2, and other encryption methods are more secure in management.
- ◇ RMON, system log, and port traffic statistics are convenient for network optimization and transformation.
- ◇ LLDP is convenient for the network management system to query and judge the communication status of the link.
- ◇ Support diverse management and maintenance methods such as Web network management, CLI command line (Console, Telnet), SNMP (V1/V2/V3), Telnet, etc.

## TECHNICAL SPECIFICATION


Model	ONV33026FM
<b>Interface Characteristics</b>	
Fixed Port	1*RS232 console port(115200,N,8,1) 24*10/100/1000Base-T RJ45 ports (Data) 4*100/1000Base-X uplink SFP fiber (including 2 combo ports) (Data)
Ethernet Port	Port 1-24 support 10/100/1000Base-T auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)
Optical Fiber Port	Gigabit optical fiber port, default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)
Optical Fiber Port Expansion	Turbo overclocking 2.5G optical module expansion and ring network
Optical Cable/ Distance	Multi-mode: 850nm/ 0-500m, Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km

<b>Chip Parameter</b>	
Network Management Type	L2+
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	52Gbps (non-blocking)
Forwarding Rate@64byte	38.69Mpps
CPU(Hz)	416M
DRAM	1G
Flash	128M
MAC	8K
Buffer Memory	8M
Jumbo Frame	9.6K
LED Indicator	Power: PWR (Yellow), System: SYS (Yellow), Network: Link (Yellow), Fiber port: L/A (Green)
Reset Switch	Yes, One-button factory reset
<b>Power Supply</b>	
Total PWR / Input Voltage	60W/ (AC100-240V)
Power Consumption	Standby<18W, Full load<30W
Power Supply	Built-in power supply, AC100~240V 50-60Hz, 0.56A
<b>Physical Parameter</b>	
Operation TEMP / Humidity	-20~+55°C, 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+75°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*290*44.5mm

Net /Gross Weight	3.2kg / 4.2kg
Installation	Desktop, 1U/19" cabinet, wall-mounted
<b>Certification &amp; Warranty</b>	
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	3 years, lifelong maintenance.
<b>Network Management Feature</b>	
Interface	<p>Port temperature protection setting</p> <p>IEEE 802.3x flow control (Full duplex)</p> <p>Port green Ethernet Energy-saving setting</p> <p>Broadcast storm control based on port speed</p> <p>Limit the speed of the message traffic at the inbound and outbound ports mini granularity is 64Kbps</p>
L3 Feature	<p>ARP protocol, max 1024 entries</p> <p>Static route /default route max 128 entries</p> <p>L2+ network management function, IPV4/IPV6 dual-stack management</p> <p>L3 routing and forwarding, support communication between different network segments and different VLAN</p>
VLAN	<p>4K VLAN based on port, IEEE802.1q</p> <p>Port configuration of Access, Trunk, Hybrid</p> <p>VLAN based on MAC address, QinQ configuration, Voice VLAN</p>
Port Aggregation	<p>LACP, Static aggregation</p> <p>Max 13 aggregation groups and 8 ports per group.</p>
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
ERPS Ring Network Protocol	<p>G.8032 (ERPS), recovery time less than 20ms</p> <p>255 Ring at most, Max 1024 devices per ring.</p>
Multicast	<p>IGMP Snooping v1/v2/v3, Max 1024 multicast groups</p> <p>MLD Snooping, Multicast VLAN, User quick exit mechanism</p>
Port Mirroring	Bidirectional data mirroring based on port


QoS	<p>Flow-based packet filtering, Priority Mark/ Remark</p> <p>Flow-based redirection, Flow-based rate limiting</p> <p>8*Output queues of each port, 802.1p/ DSCP priority mapping</p> <p>Diff-Serv QoS, Queue Scheduling Algorithm (SP, WRR, SP+WRR)</p>
ACL	<p>ACL distribution based on port and VLAN</p> <p>L2-L4 packet filtering function, matching the first 80 bytes message, and provides ACL definitions based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.</p>
Security	<p>IEEE802.1X &amp; MAC address authentication</p> <p>IP-MAC-VLAN-Port binding, MAC learning limit</p> <p>Broadcast storm control, Backup for host datum</p> <p>Mac black holes, IP source protection, Anti-DoS attack</p> <p>SSH 2.0, SSL, Port isolation, ARP message speed limit</p> <p>User hierarchical management and password protection</p> <p>AAA &amp; RADIUS &amp; TACACS+ certification, ARP inspection</p>
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	<p>System work log, Link Layer Discovery Protocol</p> <p>NTP clock, Cable length detection, SNMP V1/V2/V3</p> <p>Ping detection, Web network management (HTTPS)</p> <p>ONV-NMS platform cluster management (LLDP+SNMP)</p> <p>One click recovery, View CPU real-time utilization status</p> <p>FTP, TFTP, Xmodem, SFTP file upload and download management</p> <p>Console/ AUX Modem/ Telnet/ SSH2.0 CLI command line configuration</p>
System	<p>Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher, Cat5 and above Ethernet cable</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, Mac OS X) installed on each computer in the network Cat5 and above Ethernet cable</p>

## DIMENSION

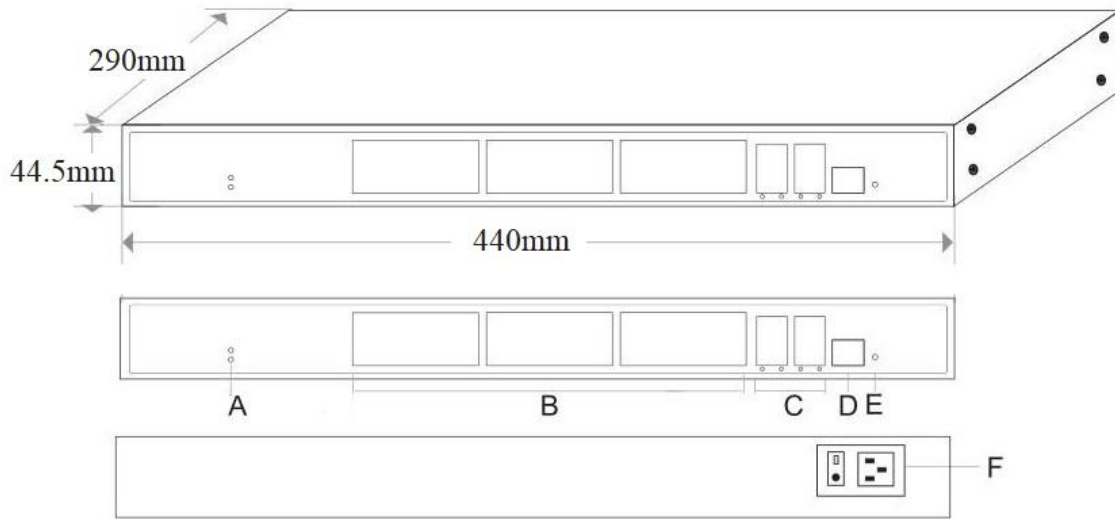

- A. Working indicator
- B. 24\*10/100/1000M RJ45 ports
- C. 4\*100/1000M uplink SFP fiber (including 2 combo ports)
- D. Console port
- E. Reset switch
- F. Power input port AC100-240V, 50/60Hz

## APPLICATION

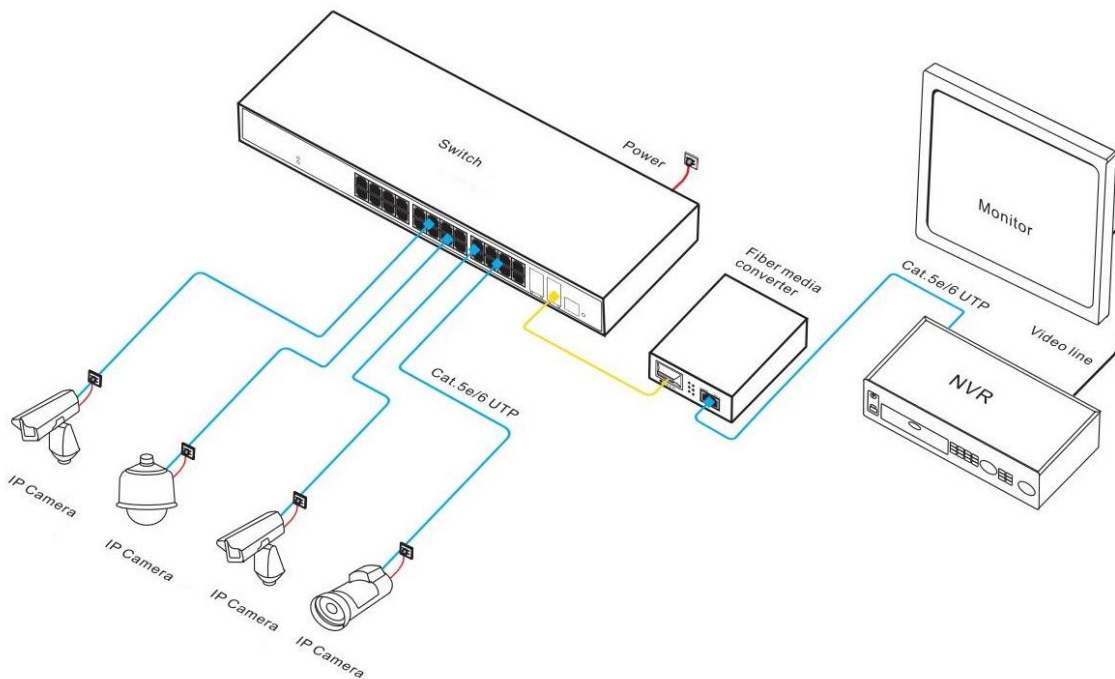

## ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV33026FM	L2+ managed Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 4*100/1000M SFP fiber (including 2 combo ports). It built-in power supply and 1U/19" cabinet installation.	60W

**Note:** The optical module is not included and needs to be purchased.

## PACKING LIST

	Content	Qty	Unit
Packing List	26-port full gigabit managed Ethernet switch	1	SET
	RJ45-DB9 Line	1	PC
	AC Power Cable	1	PC
	Mounting Kits(Hanging Ear)	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

## OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630	SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. support DDM function and hot plugging.	PC
	2632	SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	2612-T	SFP optical module, 1.25G single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC



	2613-R	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	2612-T-SC	SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. support DDM function and hot plugging.	PC
	2613-R-SC	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. support DDM function and hot plugging.	PC
Power Module	2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC

## RELATED PRODUCT

Model	Description
ONV33020FM	L2+ managed Ethernet fiber switch with 16*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. It built-in power supply and 1U/19" cabinet installation.
ONV33168FM	L2+ managed Ethernet fiber switch with 8*10/100/1000M RJ45 ports and 8*100/1000M uplink SFP fiber ports. It built-in power supply and 1U/19" cabinet installation.
ONV33028FM	L2+ managed Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. It built-in power supply and 1U/19" cabinet installation.
ONV33052FM	L2+ managed Ethernet fiber switch with 48*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. It built-in power supply and 1U/19" cabinet installation.

## CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: [onv@onv.com.cn](mailto:onv@onv.com.cn)

Skype: [onv@onv.com.cn](https://www.skype.com/people/onv@onv.com.cn)

WeChat ID: ONV-PoE-IoT

Website: [www.onvcom.com](http://www.onvcom.com)

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333, Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou