

## Product Datasheet

# 5-port Gigabit Ethernet Switch

(ONV-H3005ES)



## OVERVIEW

The ONV-H3005ES is a Gigabit Ethernet switch independently developed by ONV. It has 5\*10/100/1000Base-T adaptive RJ45 ports. The scheme of the large backplane and large cache switching chip is preferred to improve the forwarding rate of large files and effectively solve the problems of video freeze and picture loss in the high-definition surveillance environment. It is suitable for hotels, banks, campuses, factory quarters, and small and medium-sized enterprises to establish a cost-effective network. Unmanaged model, plug and play, no configuration, simple and convenient to use.

## FEATURE

### ■ Gigabit rate, high-speed transmission

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.
- ◇ Gigabit RJ45 port, high speed, fast transmission, convenient for users to flexibly network, and meet various high-definition network requirements

### ■ Stable and reliable


- ◇ CCC, CE, FCC, RoHS.
- ◇ Plug and play, no configuration, simple and convenient.
- ◇ Low power consumption, no fan, flame-retardant plastic shell, compact and beautiful.
- ◇ The user-friendly panel can show the device status through the LED indicator of Link/ Act and PWR.

## TECHNICAL SPECIFICATION


Model	ONV-H3005ES	ONV-H3008ES
<b>Interface Characteristics</b>		
Fixed Port	5*10/100/1000Base-T RJ45 ports (Data)	8*10/100/1000Base-T RJ45 ports (Data)
Ethernet Port	10/100/1000Base-T auto-sensing, full/ half duplex MDI/ MDI-X self-adaption.	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)	
<b>Chip Parameter</b>		
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3x	
Forwarding Mode	Store and Forward (Full Wire Speed)	
Switching Capacity	10Gbps (non-blocking)	16Gbps (non-blocking)
Forwarding Rate @64byte	7.44Mpps	11.9Mpps
MAC	2K	
Buffer Memory	2M	
Jumbo Frame	9.2K	
LED Indicator	Power: PWR (Green), Network: Link/ Act (Green)	
<b>Power Supply</b>		

Total PWR / Input Voltage	5W/ DC5V	
Power Consumption	Standby<1W, Full Load<4W	Standby<1W, Full Load<5W
Power Supply	External power adapter, AC100~240V 50-60Hz, 0.56A	
<b>Physical Parameter</b>		
Operation TEMP/ Humidity	0°C~+55°C, 5%~90% RH Non condensing	
Storage TEMP/ Humidity	-40°C~+75°C, 5%~95% RH Non condensing	
Dimension (L*W*H)	87.7*55*23.9mm	132*55*23.9mm
Net /Gross Weight	0.08kg/ 0.18kg	0.1kg/ 0.2kg
Installation	Desktop	
<b>Certification &amp; Warranty</b>		
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30	
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS	
Warranty	1 year, lifelong maintenance.	

## DIMENSION

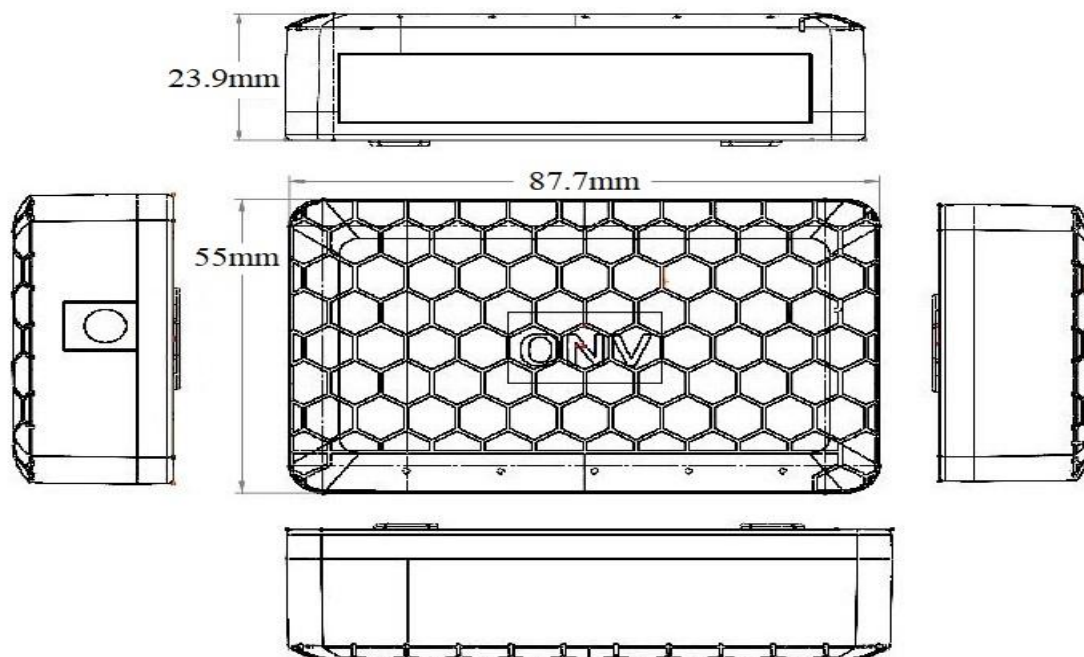

## APPLICATION

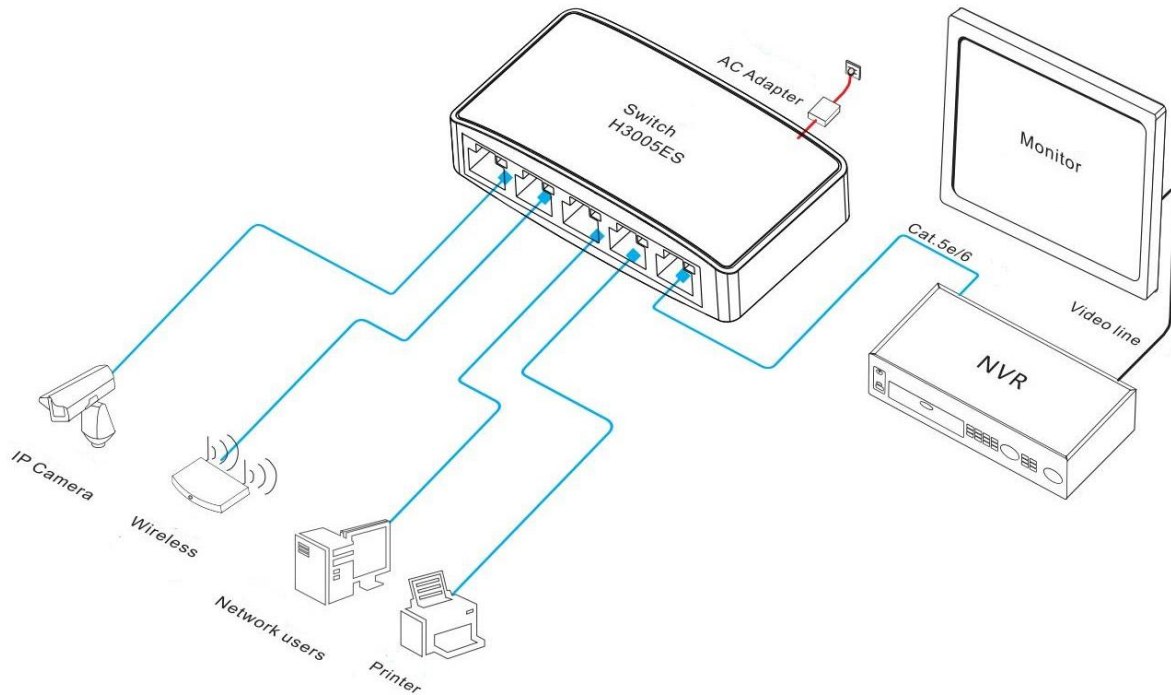

## ORDERING INFORMATION

Model	Description	External Power Adapter
ONV-H3005ES	Unmanaged Ethernet switch with 5*10/100/1000M RJ45 ports. External power adapter.	5W
ONV-H3008ES	Unmanaged Ethernet switch with 8*10/100/1000M RJ45 ports. External power adapter.	

## PACKING LIST

	Content	Qty	Unit
Packing List	5-port gigabit Ethernet switch	1	SET
	Power Adapter 5V/1A	1	PC
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

## CONTACT US



**Optical Network Video Technologies (Shenzhen) Co., Ltd.**

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: [onv@onv.com.cn](mailto:onv@onv.com.cn)

Skype: [onv@onv.com.cn](https://www.skype.com/people/onv@onv.com.cn)

WeChat ID: ONV-PoE-IoT

Website: [www.onvcom.com](http://www.onvcom.com)

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333, Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

