

Product Datasheet

10-port 10/100M Smart PoE Switch

(ONV-H1108PLD)



OVERVIEW

The ONV-H1108PLD is a 10/100M smart PoE switch independently developed by ONV. It has 8*10/100Base-TX RJ45 ports and 2*10/100Base-TX RJ45 ports. Port 1-8 can support IEEE 802.3 af/at PoE standard and single-port PoE power reaches 30W. It can support the watchdog function. When the port communication failure corresponds to the port PoE will automatically restart, self-recover network communication, reducing manual intervention and maintenance. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to PoE terminal equipment such as wireless AP, IP camera, VoIP phone, building visual access control intercom through network cable, to meet the network environment that needs high-density PoE power supply, suitable for hotels, campuses, parks, supermarkets, scenic spots, factory quarters and SMB small and medium-sized enterprises form a cost-effective network. Unmanaged mode, plug, and play, no configuration, easy to use.

FEATURE

■ 10/100M access, uplink RJ45 port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.

- ◇ 10*10/100Base-TX RJ45 ports allow users to flexibly network to meet the networking requirements of various scenarios.

■ Smart PoE power supply

- ◇ 8*10/100Base-TX PoE ports can support the watchdog function, real-time detection of data communication status.
- ◇ Comply with IEEE 802.3 af/at PoE standard, automatically identify PoE devices for power supply, and not damage non-PoE devices.
- ◇ 8*10/100Base-TX PoE ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.

■ Innovative function

- ◇ **Power supply priority mode:** The PoE port power supply priority function is enabled by default, giving priority to the power output of the PoE port (port 1) to prevent overload.
- ◇ **PoE watchdog mode (D):** When the switch status is ON (default off), port 1-8 can support the watchdog function and automatically detects the data communication status in real-time.
- ◇ **long-distance transmission and VLAN mode (E):** When the switch status is ON (default off), Port 1-8 rate is 10M/250 meters transmission, the port physical VLAN isolated, broadcast storm, the transmission distance can up to 250m, solve the problem of poor transmission caused by line aging.

■ Stable and reliable


- ◇ CCC, CE, FCC, RoHS.
- ◇ Plug and play, no configuration, easy to maintain.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link, and PoE.
- ◇ Self-developed power supply, high redundancy design, providing a long-term and stable PoE power output.
- ◇ Low power consumption, galvanized steel housing, and excellent heat dissipation to ensure the stable operation of the switch.

TECHNICAL SPECIFICATION


Model	ONV-H1064PLD	ONV-H1108PLD
Interface Characteristics		
Fixed Port	4*10/100Base-TX PoE ports (Data/Power) 2*10/100Base-TX uplink RJ45 ports (Data)	8*10/100Base-TX PoE ports (Data/Power) 2*10/100Base-TX uplink RJ45 ports (Data)
Ethernet Port	Port 1-6/ 1-10 can support 10/100Base-TX auto-sensing, full/ half duplex MDI/ MDI-X self-adaption	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤250 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters)	
Function Switch	E: long-distance transmission and VLAN isolation (Default off)	
	D: PoE watchdog mode: When the network fails, PoE watchdog will restart the power supply of the device and automatically repair the network communication. (Default off)	
	Note: The function switch can control different functions, which can be enabled separately and simultaneously.	
Chip Parameter		
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3x	
Forwarding Mode	Store and Forward(Full Wire Speed)	
Switching Capacity	1.6Gbps (non-blocking)	2Gbps (non-blocking)
Forwarding Rate @64byte	0.89Mpps	1.488Mpps
MAC	1K	2K
Buffer Memory	768K	1.25M
Jumbo Frame	1536byte	
LED Indicator	Power: PWR (Green), Network: Link (Yellow), PoE: PoE (Green), Function	

	switch: E/D (Green)	
PoE & Power Supply		
PoE Port	Port 1-4	Port 1-8
Power Supply Pin	1/2(+) 3/6(-)	
Max Power Per Port	30W, IEEE 802.3 af/at	
Total PWR / Input Voltage	65W/ (AC100-240V)	120W/ (AC100-240V)
Power Consumption	Standby<3W, Full load<65W	Standby<5W, Full load<120W
Power Supply	Built-in power supply, AC100-240V 50-60Hz, 1.1A	Built-in power supply, AC100-240V 50-60Hz, 2.2A
Physical Parameter		
Operation Temp/ Humidity	-20°C~+55°C, 5%~90% RH Non condensing	
Storage Temp/ Humidity	-40°C~+80°C, 5%~95% RH Non condensing	
Dimension (L*W*H)	142.5*115*40mm	195*130*40mm
Net /Gross Weight	0.55kg/ 0.8kg	0.75kg/ 1.0kg
Installation	Desktop, Wall mount	
Certification & Warranty		
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30	
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS	
Warranty	1 year, lifelong maintenance.	

DIMENSION

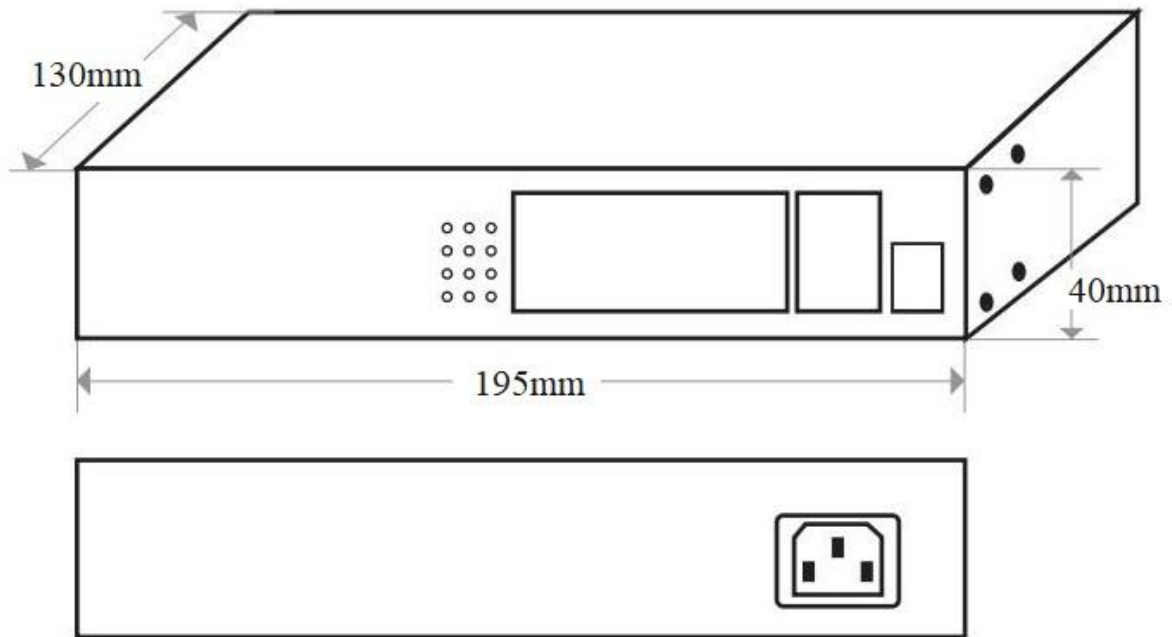

APPLICATION

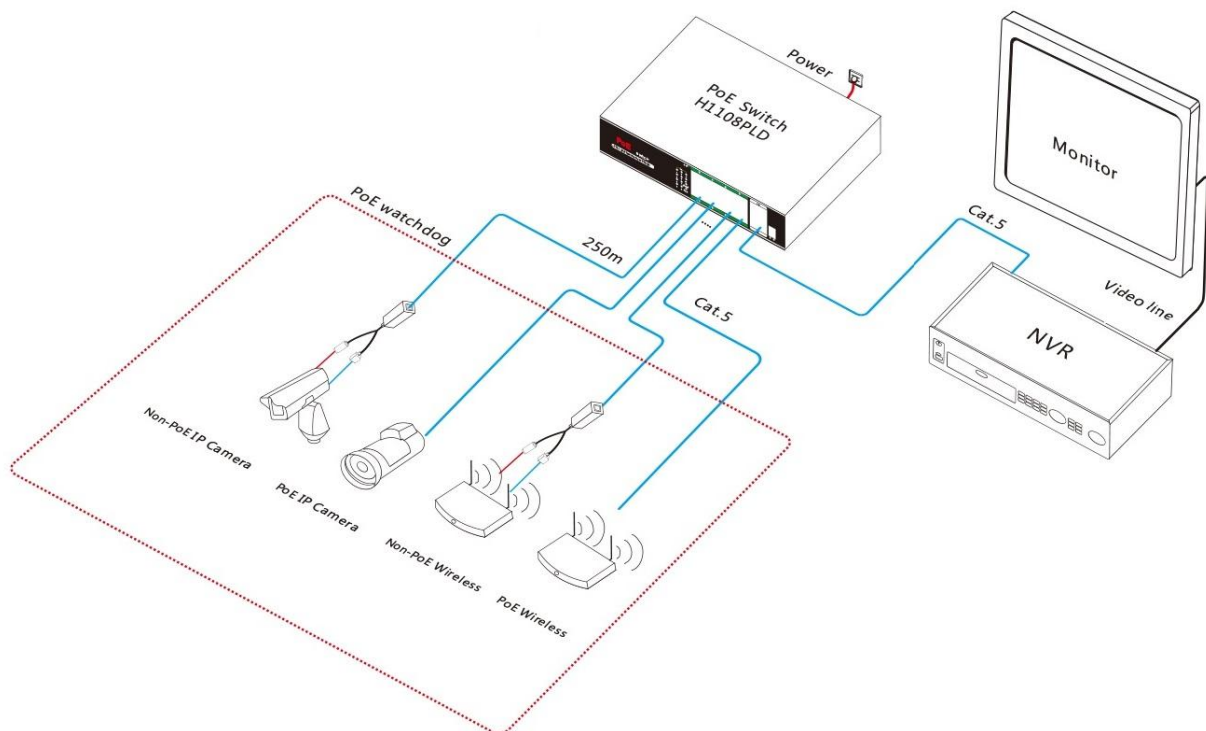

ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV-H1064PLD	Smart PoE switch with 6*10/100M RJ45 ports. Port 1-4 can support IEEE 802.3 af/at PoE standard. Adjust function switch, port 1-4 can support 10M/250 meters transmission, VLAN isolation, and PoE watchdog function. Built-in power supply.	65W
ONV-H1108PLD	Smart PoE switch with 10*10/100M RJ45 ports. Port 1-8 can support IEEE 802.3 af/at PoE standard. Adjust function switch, port 1-8 can support 10M/250 meters transmission, VLAN isolation, and PoE watchdog function. Built-in power supply.	120W

PACKING LIST

	Content	Qty	Unit
Packing List	10-port 10/100M smart PoE switch	1	SET
	AC Power Cable	1	PC
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

CONTACT US

ONV Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Skype: onv@onv.com.cn

WeChat ID: ONV-PoE-IoT

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333, Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

