

## Product Datasheet

# 6-port Gigabit Uplink Managed Industrial Ethernet Switch (ONV-IPS31064FM)



## OVERVIEW

The ONV-IPS31064FM is a gigabit uplink managed industrial Ethernet switch independently developed by ONV. It has 4\*10/100Base-TX RJ45 ports and 2\*10/100/1000Base-T uplink RJ45 ports and 2\*100/1000Base-X uplink SFP fiber combo ports. Each port can support wire-speed forwarding.

The ONV-IPS31064FM adopts a new generation of high-performance hardware and software platform, supports a complete security protection mechanism, perfect ACL/QoS strategy and flexible VLAN function for easy management and maintenance, and meets users' needs for easy management, high security and low-cost networking of network equipment. It adopts aluminum alloy housing and has excellent adaptability to industrial site environments (including mechanical stability, climate environment adaptability, electromagnetic environment adaptability, etc.). It is suitable for industrial scenarios such as intelligent transportation, rail transportation, power industry, mining, petroleum, shipping, metallurgy, and green energy construction to build economical, efficient, stable, and reliable communication networks.

## FEATURE

### ■ 100M access, uplink RJ45/SFP fiber combo port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.
- ◇ Support RJ45 port and Gigabit uplink RJ45/SFP fiber combo port, which enables users to flexibly build networking to meet the needs of various scenarios.

### ■ Security

- ◇ IP+MAC+Port binding function.
- ◇ Support port isolation and port broadcast storm suppression.
- ◇ Support 802.1X authentication, provide authentication function for LAN computers, and control the authorization status of controlled ports according to the authentication results.

### ■ Strong business processing capability

- ◇ Support STP/RSTP/MSTP production tree protocol, and eliminate Layer 2 loops to achieve link backup.
- ◇ Support IEEE 802.1Q VLAN, users can flexibly divide VLAN according to needs, and support QinQ configuration.
- ◇ Support static aggregation and dynamic aggregation to effectively increase link bandwidth to achieve load balancing, and link backup to improve link reliability.
- ◇ Support QoS, three priority modes based on port, based on 802.1P, and based on DSCP, and four queue scheduling algorithms of Equ, SP, WRR, and SP+WRR.
- ◇ Support ACL to filter data packets by configuring matching rules, processing operations, and time permissions, and provide flexible security access control strategies.
- ◇ Support IGMP V1/V2 multicast protocol, IGMP Snooping meets the access requirements of multi-terminal high-definition video surveillance and video conferencing.

### ■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR and

Link.

- ◇ Low power consumption, no fan, Aluminum alloy housing, and excellent heat dissipation to ensure the stable operation of the switch.

### ■ Easy O&M management

- ◇ Support CPU monitoring and memory monitoring.
- ◇ Support HTTPS, SSLV3, SSHV1/V2, and other encryption methods, making management more secure.
- ◇ Support Web network management, SNMP (v1/v2/v3), and other diversified management and maintenance.
- ◇ Support RMON, system log, and port traffic statistics to facilitate network optimization and transformation.
- ◇ Support LLDP to facilitate the network management system to query and judge the communication status of the link.

## TECHNICAL SPECIFICATION


Model	ONV-IPS31064FM
<b>Interface Characteristics</b>	
Fixed Port	4*10/100Base-TX RJ45 ports (Data) 2*10/100/1000Base-T uplink RJ45 ports (Data) 2*100/1000Base-X uplink SFP fiber ports (combo ports) (Data) 2 sets V+, V- redundant DC power ports (5P Phoenix terminal)
Ethernet Port	Port 1-4 can support 10/100Base-TX and Port 5-6 can support 10/100/1000Base-T(X) auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)
Optical Fiber Port	Gigabit optical fiber interface, default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)

Optical Cable/ Distance	Multi-mode: 850nm/ 0-550m, Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km.
<b>Chip Parameter</b>	
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3u 100Base-FX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	14.8Gbps (non-blocking)
Forwarding Rate @64byte	3.57Mpps
MAC	16K
Buffer Memory	4M
Jumbo Frame	10K
LED Indicator	Power: PWR (Green), Network: Link, Link/Act (Yellow), Rate: Speed (Green)
Reset Switch	Yes, Press and hold the reset switch for 10s and release it to restore the factory settings
<b>Power Supply</b>	
Power Consumption	Standby<5W, Full load<8W
Working Voltage	DC12-48V, 5P industrial phoenix terminal, support anti-reverse protection
Power Supply	No, optional 24V/24W industrial power supply
<b>Physical Parameter</b>	
Operation Temp/ Humidity	-40~+75°C, 5%~90% RH Non condensing
Storage Temp/ Humidity	-40~+85°C, 5%~95% RH Non condensing
Dimension (L*W*H)	145*134.5*47mm
Net /Gross Weight	0.7kg /0.9kg
Installation	Desktop, 35mm DIN Rail
<b>Certification &amp; Warranty</b>	


Lightning Protection	Protection level: IP40
	Lightning protection: 6KV 8/20us
	IEC61000-4-3 (RS):10V/m (80~1000MHz)
	FCC Part 15/CISPR22 (EN55022): Class B
	IEC61000-6-2 (Common Industrial Standard)
	IEC61000-4-9 (Pulsed magnet field): 1000A/m
	IEC61000-4-10 (Damped oscillation): 30A/m, 1MHz
	IEC61000-4-12/18 (Shockwave): CM 2.5kV, DM 1kV
	IEC61000-4-4(EFT): Power cable:±4kV, Data cable: ±2kV
	IEC61000-4-16 (Common-mode transmission): 30V, 300V, 1s
	IEC61000-4-2 (ESD): ±8kV contact discharge, ±15kV air discharge
	IEC61000-4-6 (Radio frequency transmission): 10V(150kHz~80MHz)
	IEC61000-4-8 (Power frequency magnetic field):100A/m, 1000A/m, 1s-3s
IEC61000-4-5 (Surge): Power cable: CM±4kV/ DM±2kV, Data cable: ±4kV	
Mechanical Properties	IEC60068-2-6 (Anti Vibration), IEC60068-2-32 (Free Fall), IEC60068-2-27 (Anti Shock)
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	5 years, lifelong maintenance.
<b>Network Management Feature</b>	
Interface	IEEE 802.3x flow control (Full duplex)
	Broadcast storm control based on port speed
	Limit the speed of the message traffic at the inbound and outbound ports mini granularity is 64Kbps
VLAN	4K VLAN based on port, IEEE 802.1q, QinQ configuration, VLAN based on protocol
Port Aggregation	LACP, Manual aggregation, Max 3 aggregation groups and 8 ports per group.
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
Multicast	MLD Snooping, Multicast VLAN, IGMP Snooping v1/v2/v3, Max 64 multicast groups, Fast log out

Port Mirroring	Bidirectional data mirroring based on port
QoS	Diff-Serv QoS, Priority Mark/Remark Queue Scheduling Algorithm (SP,WRR,SP+WRR) 8*Output queues of each port, 802.1p/DSCP priority mapping
ACL	The L2-L4 packet filtering function can match the first 80 bytes of the message and provide ACL definition based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.
Security	IP+MAC+port binding function, Port isolation, Port broadcast storm suppression
DHCP	DHCP Client, DHCP Snooping, DHCP Relay
Management	NTP clock, One-click restore, SNMP V1/V2/V3, System work log, Web network management (https)

## DIMENSION

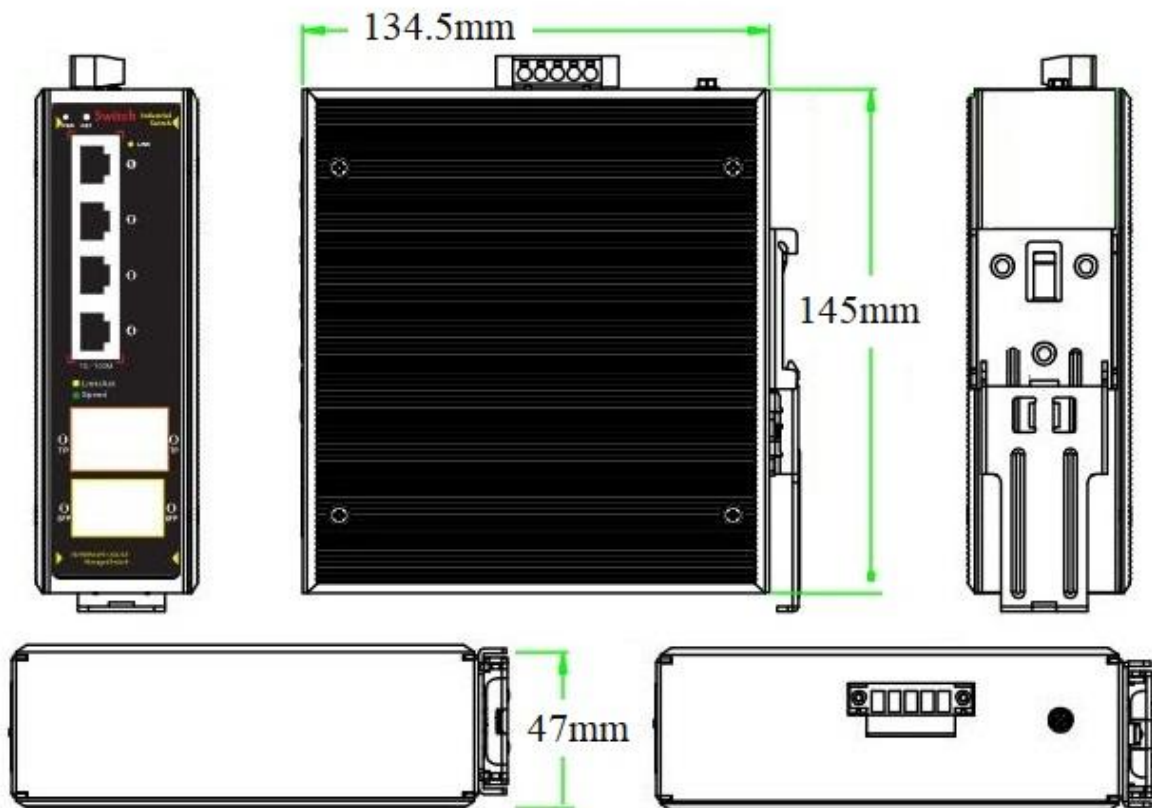

## APPLICATION

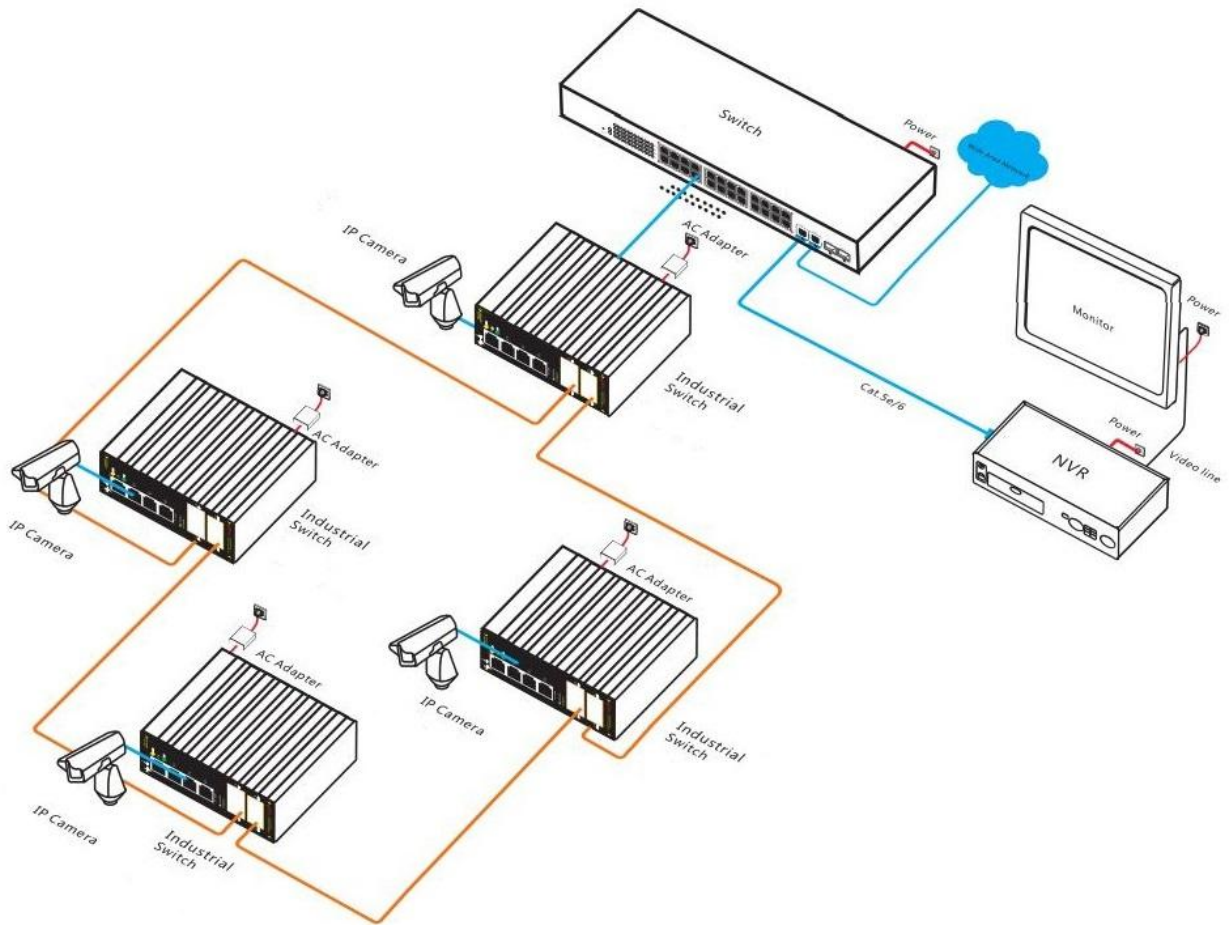

## ORDERING INFORMATION

Model	Description	Recommended Power Supply
ONV-IPS31064FM	L2 managed industrial Ethernet switch with 4*10/100M RJ45 ports and 2*10/100/1000M uplink RJ45 ports and 2*100/1000M uplink SFP fiber combo ports. It can support dual DC power supply input and DIN Rail mounting.	24W

**Note:** The optical module and power supply are not included and need to be purchased.

## PACKING LIST

Packing List	Content	Qty	Unit
	6-port gigabit uplink managed industrial Ethernet switch	1	SET
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

## OPTICAL MODULE

Product	Model	Description	Unit
155M Optical Module	5315-114-G	Industrial SFP optical module, 155M single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	1313-20-G	Industrial SFP optical module, 155M single-mode single fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	1315-20-G	Industrial SFP optical module, 155M single-mode single fiber, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. supports DDM function and hot plugging.	PC
	2632-G	Industrial SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2612-T-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2613-R-G	Industrial SFP optical module, 1.25G single-mode single fiber	PC



		TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	
	2612-T-SC-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC
	2613-R-SC-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC
Power Module	2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC

## POWER SUPPLY

Product	Model	Description	Unit
24W DIN Rail Industrial Power Supply	GWS-DP24-24	DIN Rail 24W single set of output power supply Input Voltage: AC100V~240V 50-60H, 0.35A Output Voltage: DC24V, 1.0A Operation Temperature: -40°C to +70°C	PC

## RELATED PRODUCT

Model	Description
ONV-IPS33064FM	L2+ managed industrial Ethernet fiber switch with 4*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP fiber ports. It can support dual DC power supply input and DIN Rail mounting.
ONV-IPS33108FM	L2+ managed industrial Ethernet fiber switch with 8*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP fiber ports. It can support dual DC power supply input and DIN Rail mounting.
ONV-IPS33012FM	L2+ managed industrial Ethernet fiber switch with 2*10/100/1000M RJ45 ports and 12*100/1000M uplink SFP fiber ports. It can support dual DC

	power supply input and DIN Rail mounting.
ONV-IPS33148FM	L2+ managed industrial Ethernet fiber switch with 10*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. It can support dual DC power supply input and DIN Rail mounting.
ONV-IPS33168FM	L2+ managed industrial Ethernet fiber switch with 8*10/100/1000M RJ45 ports and 8*100/1000M uplink SFP fiber ports. It can support dual DC power supply input and DIN Rail mounting.

## CONTACT US

**ONV** Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT

Email: onv@onv.com.cn

Skype: onv@onv.com.cn

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333, Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

