

Product Datasheet

44-port 10G Uplink Managed Industrial Ethernet Switch (ONV-IPS36448FM)



OVERVIEW

The ONV-IPS36448FM is a 10G uplink managed industrial Ethernet fiber switch independently developed by ONV. It has 12*10/100/1000Base-T adaptive RJ45 ports and 28*100/1000Base-X SFP fiber ports and 4*1/10G uplink SFP+ fiber ports. Each port can support wire-speed forwarding.

The ONV-IPS36448FM has L2+ network management function, supports IPV4/ IPV6 management, static route forwarding, complete security protection mechanism, complete ACL/QoS policy, and rich VLAN functions for easy management and maintenance. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS (<20ms) to improve link backup and network reliability, and can quickly restore communications when a one-way network fails. Ensure uninterrupted communication for important applications. According to the application needs, various

application services configurations such as port management, routing address management, port flow control, VLAN division, IGMP, security policy, and other network management methods are carried out through Web, CLI, SNMP, Telnet, and other network management methods. It meets the needs of various industrial Ethernet application environments and is suitable for establishing economical, efficient, stable, and reliable communication networks in industrial scenarios such as intelligent transportation, rail transportation, power industry, mining, petroleum, shipping, metallurgy, and green energy construction.

FEATURE

■ Gigabit multi-fiber port access, uplink 1/10G SFP+ fiber port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit RJ45 port and 1/10G uplink SFP+ fiber port to meet the networking requirements of various scenarios.

■ Security

- ◇ Support port isolation and port broadcast storm suppression.
- ◇ Support IP+MAC+port+VLAN quadruple flexible combination binding function.
- ◇ Support 802.1X authentication to provide authentication functions for LAN computers, and control the authorization status of controlled ports according to the authentication results.

■ Strong business processing capability

- ◇ Support ERPS ring network and STP/RSTP/MSTP to eliminate layer 2 loops and realize link backup.
- ◇ Support IEEE802.1Q VLAN, Users can flexibly divide VLAN, Voice VLAN, and QinQ configuration according to their needs.
- ◇ Support static and dynamic aggregation to effectively increase link bandwidth, realize load balancing, link backup, and improve link reliability.

- ◇ Support QoS, port-based, 802.1P-based, and DSCP-based three priority modes and four queue scheduling algorithms: Equ, SP, WRR, and SP+WRR.
- ◇ Support ACL to filter data packets by configuring matching rule processing operations and time permissions, and provide flexible security access control policies.
- ◇ Support IGMP V1/V2/V3 multicast protocol, IGMP Snooping meets multi-terminal high-definition video surveillance and video conference access requirements.

■ **Stable and reliable**

- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR and Link.
- ◇ Self-developed power supply, redundant dual power supply provides long-term stable power output.
- ◇ Low power consumption, no fan, galvanized steel housing, an aluminum alloy heat sink combination, and excellent heat dissipation ensure the switch's stable operation.

■ **Easy O&M management**

- ◇ Support CPU monitoring, memory monitoring, Ping detection, and cable length detection.
- ◇ Support RMON, system log, and port traffic statistics to facilitate network optimization and transformation.
- ◇ Support HTTPS, SSLV3, SSHV1/V2, and other encryption methods, making management more secure.
- ◇ Supports LLDP, making it easier for the network management system to query and determine the communication status of the link.
- ◇ Support Web network management, CLI command line (Console, Telnet), SNMP (V1/V2/V3), and other diversified management and maintenance.

TECHNICAL SPECIFICATION

Model	ONV-IPS36448FM
Interface Characteristics	
Fixed Port	1*Console port (115200,N,8,1) 2*AC100-240V power input ports Power off alarm switch port (FAULT) 4*1/10G uplink SFP+ fiber ports (Data) 12*10/100/1000Base-T RJ45 ports (Data) 28*100/1000Base-X SFP fiber ports (Data) 2*DC12-48V power input ports (support anti-reverse protection)
Ethernet Port	Port 1-12 can support 10/100/1000Base-T(X) auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meters) 100BASE-TX: Cat5 or later UTP(≤100 meters) 1000BASE-T: Cat5e or later UTP(≤100 meters)
Optical Fiber Port	1/10G SFP+ optical fiber port, default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)
Optical Fiber Port Expansion	Turbo overclocking 2.5G optical module expansion and ring network
Optical Cable/ Distance	Multi-mode: 850nm/ 0-550m, 850nm/ 0-300m(10G), Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km
Chip Parameter	
Network Management Type	L2+
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3ae 10GBase-LR/SR, IEEE 802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)

Switching Capacity	176Gbps (non-blocking)
Forwarding Rate @64byte	119.04Mpps
CPU (Hz)	500M
DRAM	4G
FLASH	256M
MAC	32K
Buffer Memory	32M
Jumbo Frame	9.6K
LED Indicator	Power: PWR (Yellow), System: SYS (Yellow), Network: Link/Act (Yellow), Fiber port: L/A (Green)
Reset Switch	Yes
Power Supply	
Total PWR/ Input Voltage	60W/(AC100-240V)
Power Consumption	Standby<35W, Full Load<55W
Power Supply	Built-in power supply, AC 100~240V 50-60Hz, 0.65A
Power Input Port	Alarm switch port, 2*AC power input ports, 2*DC12-48V input ports Dual input power port design: AC power supply priority to support anti-reverse connection protection, and automatically switches to DC connection when power fails.
Physical Parameter	
Operation Temp/ Humidity	-40°C~+80°C, 5%~90% RH Non condensing
Storage Temp/ Humidity	-40°C~+85°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*298*44mm
Net /Gross Weight	4.0kg/4.8kg
Installation	Desktop, 1U/19" cabinet

Certification & Warranty

Lightning Protection	<p>Protection level: IP40</p> <p>Lightning protection: 6KV 8/20us</p> <p>IEC61000-4-3(RS):10V/m (80~1000MHz)</p> <p>FCC Part 15/CISPR22(EN55022): Class B</p> <p>IEC61000-6-2(Common Industrial Standard)</p> <p>IEC61000-4-9(Pulsed magnet field): 1000A/m</p> <p>IEC61000-4-10(Damped oscillation): 30A/m, 1MHz</p> <p>IEC61000-4-12/18(Shockwave): CM 2.5kV, DM 1kV</p> <p>IEC61000-4-4(EFT): Power cable:±4kV, Data cable: ±2kV</p> <p>IEC61000-4-16(Common-mode transmission): 30V, 300V, 1s</p> <p>IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge</p> <p>IEC61000-4-6(Radio frequency transmission): 10V(150kHz~80MHz)</p> <p>IEC61000-4-8(Power frequency magnetic field):100A/m,1000A/m,1-3s</p> <p>IEC61000-4-5(Surge): Power cable: CM±4kV/DM±2kV, Data cable: ±4kV</p>
Mechanical Properties	<p>IEC60068-2-6 (Anti Vibration), IEC60068-2-32 (Free Fall), IEC60068-2-27 (Anti Shock)</p>
Certification	<p>CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS</p>
Warranty	<p>5 years, lifelong maintenance.</p>


Network Management Feature

Interface	<p>Port temperature protection setting</p> <p>No connection port automatic sleep</p> <p>IEEE 802.3x flow control (Full duplex)</p> <p>Port green Ethernet Energy-saving setting</p> <p>Broadcast storm control based on port speed</p> <p>SFP+ optical port DDMI real-time digital diagnosis</p> <p>Limit the rate of packet traffic on incoming and outgoing ports, mini granularity is 64Kbps</p>
-----------	---

L3 Feature	<p>ARP protocol, max 1024 entries</p> <p>Static routing/default routing, max 128 entries</p> <p>L2+ network management function, IPV4/IPV6 dual-stack management</p> <p>L3 routing and forwarding, support communication between different network segments and different VLAN</p>
VLAN	<p>VLAN based on MAC, VLAN based on the protocol</p> <p>Port configuration of Access, Trunk, Hybrid, GVRP VLAN protocol</p> <p>(4K) VLAN based on port, IEEE802.1q, Voice VLAN, QinQ configuration</p>
Port Aggregation	<p>Static aggregation, LACP dynamic aggregation</p> <p>Max 22 aggregation groups, per group support up to 8 ports</p>
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
Industrial Ring Network Protocol	G.8032 (ERPS), Recovery time less than 20ms, 250 Ring at most, Max 250 devices per ring.
Multicast	MLD Snooping, Multicast VLAN, Fast log out, IGMP Snooping v1/v2/v3, Max 1024 multicast groups
Port Mirroring	Bidirectional data mirroring based on port
QoS	<p>Flow-based rate limiting, Flow-based redirection</p> <p>Queue scheduling algorithm (SP, WRR, SP+WRR)</p> <p>Flow-based packet filtering, 8*Output queues of each port</p> <p>802.1p/DSCP priority mapping, Diff-Serv QoS, Priority mark/ remark</p>
ACL	<p>ACL distribution based on port and VLAN</p> <p>L2-L4 packet filtering function, matching the first 80 bytes message, and provides ACL definitions based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.</p>
Security	<p>IP source address protection</p> <p>ARP intrusion detection function</p> <p>ARP message rate limiting function</p> <p>Port broadcast message suppression</p>


	<p>AAA&RADIUS&TACACS+ certification</p> <p>SSL ensures data transmission security</p> <p>Anti-DoS attack, MAC address black hole</p> <p>Limit the number of MAC addresses learned</p> <p>Port isolation, Host data backup mechanism</p> <p>Quadruple binding function of IP+MAC+VLAN+port</p> <p>User hierarchical management and password protection</p> <p>SSH 2.0 provides a secure encrypted channel for user login</p> <p>IEEE802.1X authentication/ centralized MAC address authentication</p>
DHCP	DHCP Server, DHCP Client, DHCP Relay, DHCP Snooping
Management	<p>System work log, Dual system backup</p> <p>NTP clock, CPU real-time utilization status check</p> <p>One-click restore, Link layer discovery protocol LLDP</p> <p>FTP, TFTP, Xmodem, SFTP file upload and download management</p> <p>SNMP V1/V2/V3, Ping detection, Web network management (https)</p> <p>Console/AUX Modem/Telnet/SSH2.0 CLI command line configuration</p> <p>Cable length status detection, Mobile APP operation and maintenance</p> <p>ONV-NMS Network management platform cluster management (PC+cloud)</p>
System	<p>Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher,</p> <p>Cat5 and above Ethernet cable</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, Mac OS X) installed on each computer in the network</p> <p>Cat5 and above Ethernet cable</p>

DIMENSION

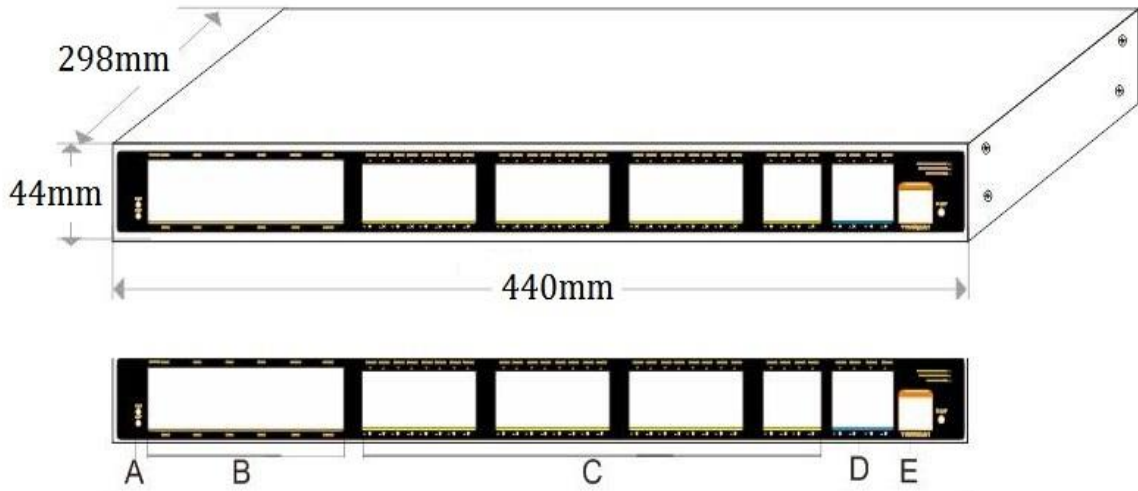

- A. Working indicator
- B. 12*10/100/1000M RJ45 ports
- C. 28*100/1000M SFP fiber ports
- D. 4*1/10G uplink SFP+ fiber ports
- E. Console port

APPLICATION

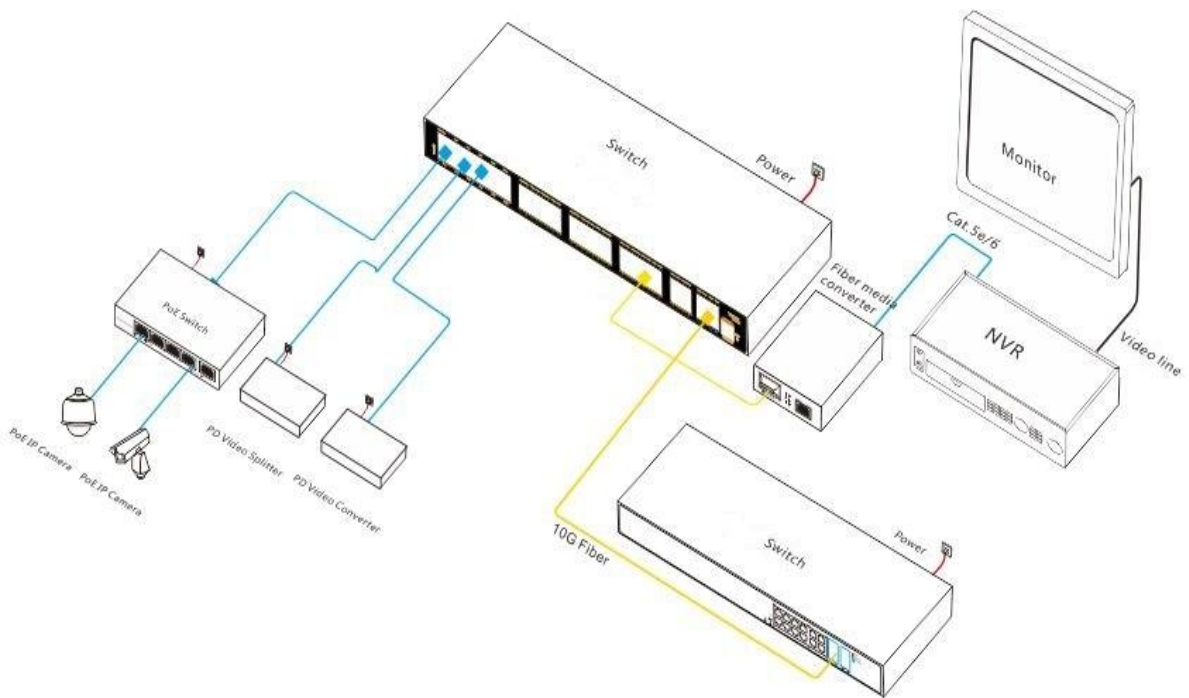

ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV-IPS38448FM	L2+ managed industrial Ethernet switch 12*10/100/1000M RJ45 ports and 28*100/1000M SFP fiber ports and 4*1/10G uplink SFP+ fiber ports. It has a built-in redundant dual power supply, supports 2AC+DC power terminal input, and 1U/19" cabinet installation.	2*60W

Note: The optical module is not included and needs to be purchased.

PACKING LIST

	Content	Qty	Unit
Packing List	44-port 10G uplink managed industrial Ethernet switch	1	SET
	AC Power Cable	1	PC
	RJ45-DB9 Adapter Cable	1	PC
	Mounting Kit	1	SET
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. supports DDM function and hot plugging.	PC
	2632-G	Industrial SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports	PC

		DDM function and hot plugging.	
	2612-T-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2613-R-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2612-T-G-SC	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC
	2613-R-G-SC	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC
10G Optical Module	6630-G	Industrial SFP+ optical module, 10G multi-mode dual fiber 850nm, transmission distance: 300m, LC interface. supports DDM function and hot plugging.	PC
	7832-G	Industrial SFP+ optical module, 10G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	7832-33-G	Industrial SFP+ optical module, 10G single-mode single fiber TX1330nm/ RX1270nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	7832-27-G	Industrial SFP+ optical module, 10G single-mode single fiber TX1270nm/ RX13300nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC

RELATED PRODUCT

Model	Description
ONV-IPS33018FM	L2+ managed industrial Ethernet fiber switch with 16*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP fiber ports. It has a built-in redundant dual power supply, supports 2AC+DC power terminal input, and 1U/19" cabinet installation.
ONV-IPS36028FM	L2+ managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 4*1/10G uplink SFP+ fiber ports. It has a built-in redundant dual power supply, supports 2AC+DC power terminal input, and 1U/19" cabinet installation.
ONV-IPS36036FM	L2+ managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 8*100/1000M SFP fiber ports and 4*1/10G uplink SFP+ fiber ports. It has a built-in redundant dual power supply, supports 2AC+DC power terminal input, and 1U/19" cabinet installation.
ONV-IPS36368FM	L2+ managed industrial Ethernet fiber switch with 8*10/100/1000M RJ45 ports and 24*100/1000M SFP fiber ports and 4*1/10G uplink SFP+ fiber ports. It has a built-in redundant dual power supply, supports 2AC+DC power terminal input, and 1U/19" cabinet installation.
ONV-IPS36048FM	L2+ managed industrial Ethernet fiber switch with 48*10/100/1000M RJ45 ports and 4*1/10G uplink SFP+ fiber ports. It has a built-in redundant dual power supply, supports 2AC+DC power terminal input, and 1U/19" cabinet installation.

CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT



Email: onv@onv.com.cn

Skype: [onv@onv.com.cn](https://www.skype.com/people/onv@onv.com.cn)

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333,

Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

