

Product Datasheet

2-port 10/100M Single-mode Dual Fiber Media Converter (ONV0110-SCX-O)



OVERVIEW

The ONV0110-SCX-O is a 10/100M fiber media converter independently developed by ONV. It has 1*10/100Base-TX RJ45 port and 1*155M uplink SC fiber port. Users can select different optical modules, such as multi-mode dual fiber, single-mode dual fiber, and single-mode single fiber. The media converter adopts the enterprise-class Realtek carrier-grade chip solution, which has stable performance, good quality, and high-cost performance. It is suitable for optical fiber access application scenarios such as security monitoring, wireless coverage, intelligent transportation, and safe cities to form a cost-effective and stable communication network. Unmanaged model, plug and play, no configuration, easy to use.

FEATURE

■ 10/100M photoelectric Ethernet conversion transmission

◇ Support non-blocking wire-speed forwarding.

- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.
- ◇ Supports 100M RJ45 port and 155M SC fiber port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

■ Easy to use

- ◇ Support full-duplex/half-duplex working mode with auto-negotiation function.
- ◇ Automatic identification of twisted pair MDI/MDI-X cross lines and parallel lines.
- ◇ LED working status indication for network diagnosis and fault checking, reducing maintenance workload.
- ◇ Compatible with IEEE 802.3u 100Base-TX/FX network protocol, 10/100M R45 port rate auto-negotiation.
- ◇ Plug and play, no configuration, centralized power supply and centralized connection management through 2U-14 slot rack.

■ Stable and reliable


- ◇ CCC, CE, FCC, RoHS.
- ◇ Low power consumption, No fan, galvanized steel housing, and excellent heat dissipation ensure stable operation of the product.

TECHNICAL SPECIFICATION

Model	ONV0110-MCX-O	ONV0110-SCX-O	ONV0110S-SCX-O-A/B
Interface Characteristics			
Interface	1*155M uplink SC fiber port (Data) 1*10/100Base-TX RJ45 port (Data)		
Ethernet Port	10/100Base-TX auto-sensing, full/ half duplex MDI/ MDI-X self-adaption		
Twisted Pair	10BASE-T: Cat3,4,5 UTP (≤100 meters)		
Transmission	100BASE-TX: Cat5 or later UTP (≤100 meters)		
Optical Fiber Port	155M multi-mode dual fiber SC interface	155M single-mode dual fiber SC interface	155M single-mode single fiber SC interface

Optical Cable/ Distance	Multi-mode: 850nm/ 0-550m, 1310nm/ 0-2km	Single-mode: 1310nm / 0-40km, 1550nm/ 0-120km.
Chip Parameter		
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3u 100Base-FX, IEEE 802.3x	
Forwarding Mode	Store and Forward (Full Wire Speed)	
Switching Capacity	1.0Gbps (non-blocking)	
Forwarding Rate @64byte	0.3Mpps	
MAC	1K	
Buffer Memory	768K	
Jumbo Frame	1536byte	
LED Indicator	Power: PWR (Green), Network: L/A (Green), Single/ duplex: FDX (Green), Fiber port: FX(Green), Rate: 10/100 (Green)	
Power Supply		
Total PWR/ Input Voltage	3W/ (5VDC)	
Power Consumption	Standby<1W, Full Load<3W	
Physical Parameter		
Operation Temp/ Humidity	-20°C~+55°C, 5%~90% RH Non condensing	
Storage Temp/ Humidity	-40°C~+85°C, 5%~95% RH Non condensing	
Dimension (L*W*H)	106.7*72*26mm	
Net /Gross Weight	0.2kg / 0.35kg	
Installation	Desktop, 2U-14 slot rack	
Certification & Warranty		
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30	
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS	
Warranty	3 years, lifelong maintenance.	

APPLICATION

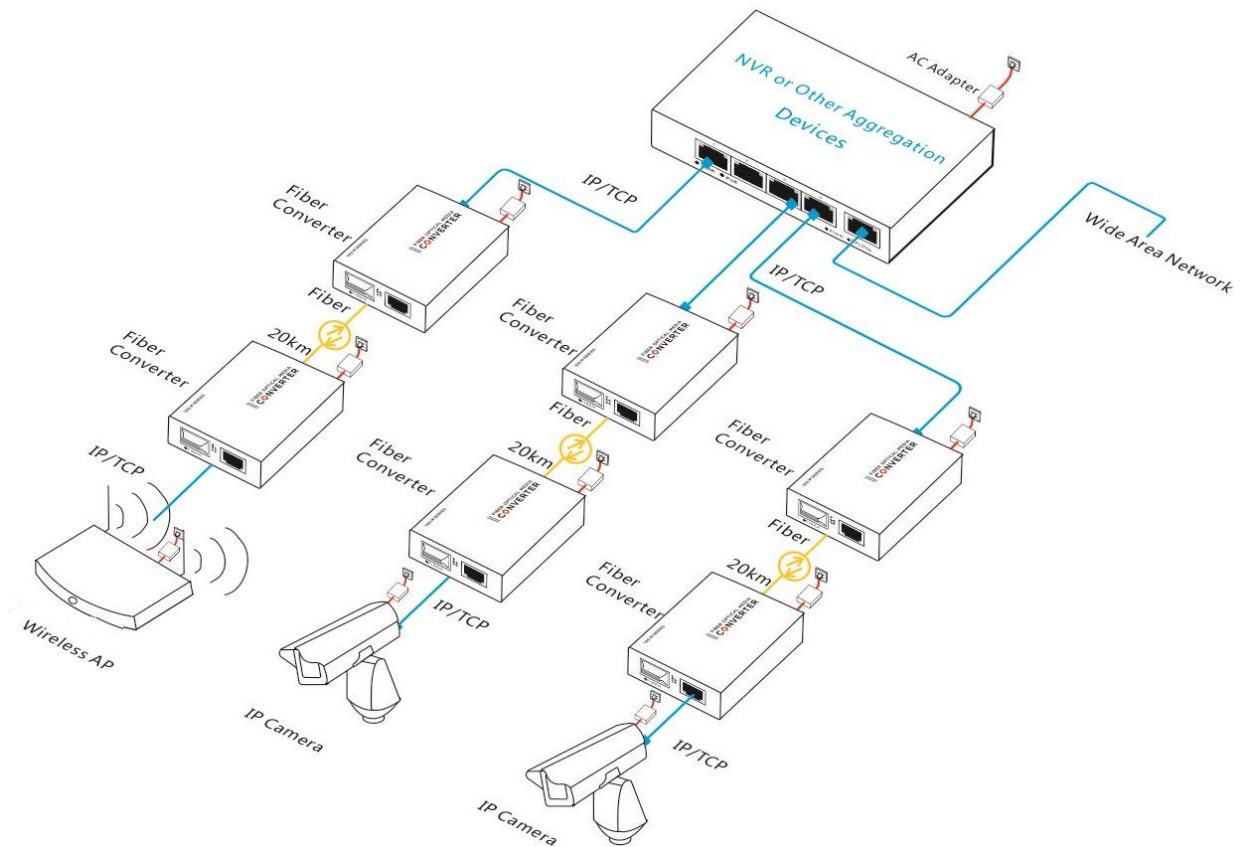

ORDERING INFORMATION

Model	Description
ONV0110-MCX-O	Multi-mode dual fiber media converter with 1*10/100M RJ45 port and 1*155M SC fiber port. 850nm/ 0-550m, 1310nm/ 0-2km. Total power is 4W. External power supply.
ONV0110-SCX-O	Single-mode dual fiber media converter with 1*10/100M RJ45 port and 1*155M SC fiber port. 1310nm/ 0-20km. Total power is 4W. External power supply.
ONV0110S-SCX-O-A	Single-mode single fiber media converter with 1*10/100M RJ45 port and 1*155M SC fiber port. 1310nm/0-20km. Total power is 4W. External power supply.

ONV0110S-SCX-O-B	Single-mode single fiber media converter with 1*10/100M RJ45 port and 1*155M SC fiber port. 1550nm/0-20km. Total power is 4W. External power supply.
------------------	---

PACKING LIST

	Content	Qty	Unit
Packing List	2-port 10/100M single-mode dual fiber media converter	1	Set
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

CONTACT US

ONV Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT

Email: onv@onv.com.cn

Skype: onv@onv.com.cn

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333, Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

