

Product Datasheet

10-port Gigabit Industrial Ethernet Switch

(ONV-IPS3108)



OVERVIEW

The ONV-IPS3108 is a Gigabit industrial Ethernet switch independently developed by ONV. It has 10*10/100/1000M adaptive RJ45 ports. Each port can support full line-rate forwarding.

The ONV-IPS3108 has excellent industrial field environment adaptability (mechanical stability, climate adaptability, electromagnetic environment adaptability, etc.). It is suitable for industrial scenes such as intelligent transportation, rail transit, power industry, mining, petroleum, shipping, metallurgy, and green energy construction to form a cost-effective, stable, and reliable communication network. Unmanaged mode, plug and play, no configuration, easy to use.

FEATURE

■ Gigabit access

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit RJ45 ports, high speed, and high bandwidth connection to meet the needs of various scenarios.

■ Stable and reliable


- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR and Link.
- ◇ Low power consumption, aluminum alloy housing, and excellent heat dissipation to ensure the stable operation of the switch.

TECHNICAL SPECIFICATION


Model	ONV-IPS3108
Interface Characteristics	
Fixed Port	10*10/100/1000Base-T RJ45 ports (Data) 2 sets V+, V- redundant DC power port (5P Phoenix terminal)
Ethernet Port	Port 1-10 can support 10/100/1000Base-T(X) auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)
Chip Parameter	
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3u 1000Base-T, IEEE 802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	20Gbps (non-blocking)
Forwarding Rate@64byte	14.88Mpps
MAC	2K
Buffer Memory	2M
Jumbo Frame	9.2K
LED Indicator	Power: PWR (Green), Network: Link G1-G10 (Yellow)

Power Supply	
Power Consumption	Standby<6W, Full load<12W
Input Voltage/ Interface	DC12-48V, 5P industrial phoenix terminal, anti-reverse protection.
Power Supply	No, optional 12V/24W or 24V/24W industrial power supply
Physical Parameter	
Operation Temp/ Humidity	-40~+75°C, 5%~90% RH Non condensing
Storage Temp/ Humidity	-40~+85°C, 5%~95% RH Non condensing
Dimension (L*W*H)	155*135*44mm
Net /Gross Weight	0.6kg/ 0.8kg
Installation	Desktop, 35mm DIN Rail
Certification & Warranty	
Lightning Protection	Protection level: IP30
	Lightning protection: 6KV 8/20us
	IEC61000-4-3 (RS):10V/m (80~1000MHz)
	FCC Part 15/CISPR22 (EN55022): Class A
	IEC61000-6-2 (Common Industrial Standard)
	IEC61000-4-9 (Pulsed magnet field): 1000A/m
	IEC61000-4-10 (Damped oscillation): 30A/m 1MHz
	IEC61000-4-12/18 (Shockwave): CM2.5kV, DM1kV
	IEC61000-4-4(EFT): Power cable: ±4kV, data cable: ±2kV
	IEC61000-4-16 (Common-mode transmission): 30V, 300V, 1s
	IEC61000-4-2 (ESD): ±8kV contact discharge, ±15kV air discharge
	IEC61000-4-6 (Radio frequency transmission): 10V(150kHz~80MHz)
	IEC61000-4-8 (Power frequency magnetic field): 100A/m, 1000A/m, 1s-3s
IEC61000-4-5 (Surge): Power cable: CM±4kV/ DM±2kV, data cable: ±4kV	
Mechanical Properties	IEC60068-2-6 (Anti Vibration), IEC60068-2-32 (Free Fall), IEC60068-2-27 (Anti Shock)
Certification	CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class A, RoHS
Warranty	5 years, lifelong maintenance.

DIMENSION

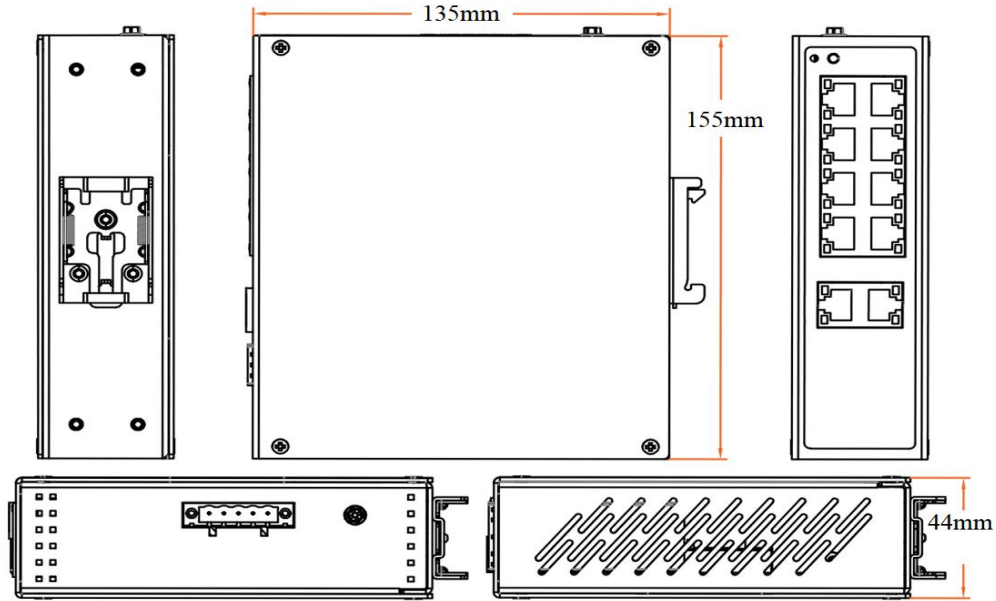

APPLICATION

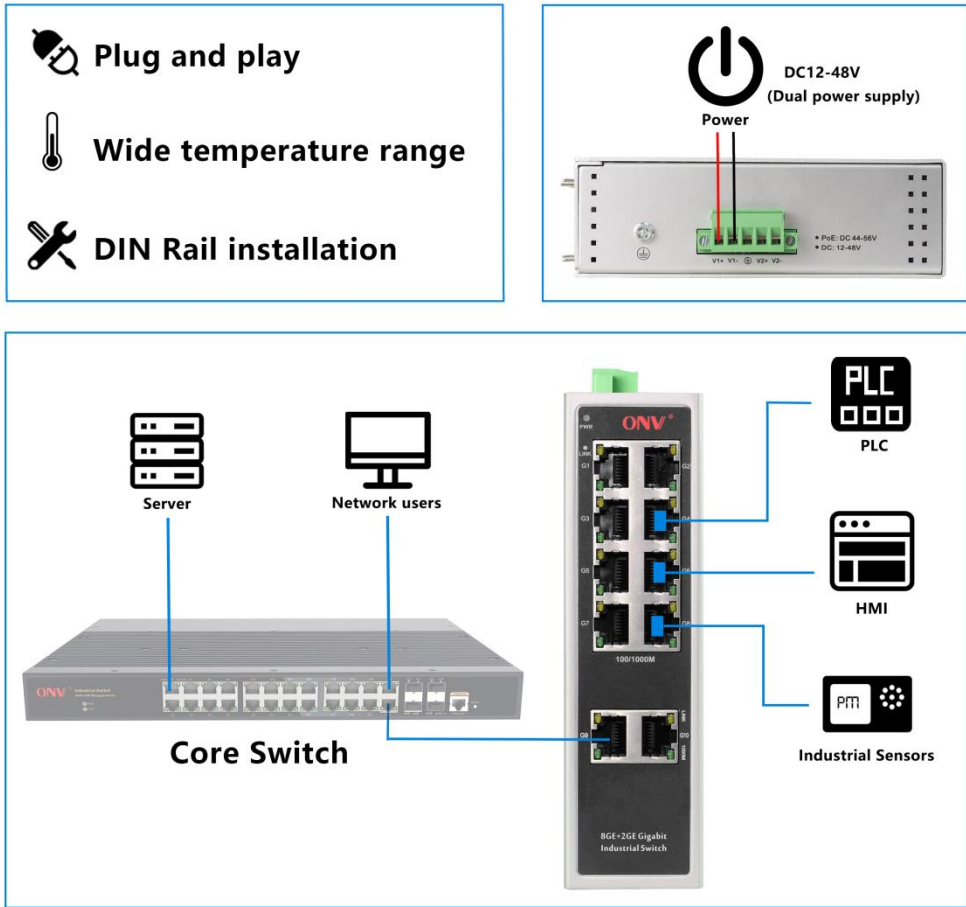

ORDERING INFORMATION

Model	Description	Recommended Power Supply
ONV-IPS3108	Unmanaged industrial Ethernet switch with 10*10/100/1000M RJ45 ports. It can support redundant DC power input and DIN Rail mounting.	24W

Note: The power supply is not included and needs to be purchased.

PACKING LIST

Packing List	Content	Qty	Unit
	10-port Gigabit industrial Ethernet switch	1	Set
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

POWER SUPPLY

Product	Model	Description	Unit
24W DIN Rail Industrial Power Supply	GWS-DP24-12	DIN Rail 24W single set of output power supply Input Voltage: AC100V~240V 50-60Hz, 0.35A Output Voltage: DC12V, 2.0A Operation Temperature: -40°C to +70°C	PC
24W DIN Rail Industrial Power Supply	GWS-DP24-24	DIN Rail 24W single set of output power supply Input Voltage: AC100V~240V 50-60Hz, 0.35A Output Voltage: DC24V, 1.0A Operation Temperature: -40°C to +70°C	PC

CONTACT US

ONV Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Skype: [onv@onv.com.cn](https://www.skype.com/people/onv@onv.com.cn)

WeChat ID: ONV-PoE-IoT

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333, Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

