

Product Datasheet

6-port 10/100M Managed Industrial PoE Switch

(ONV-IPS31064PFM)



OVERVIEW

The ONV-IPS31064PFM is a 10/100M managed industrial PoE fiber switch independently developed by ONV. It has 4*10/100Base-TX adaptive RJ45 ports and 2*10/100/1000Base-T uplink RJ45 ports and 2*100/1000Base-X Fiber SFP combo ports. Port 1-4 can support IEEE 802.3 af/at PoE standard and the single-port PoE power reaches 30W. As a PoE power supply device, it can automatically detect and recognize power-receiving devices that meet the standard and supply power through the network cable. It can supply power to PoE terminal equipment such as wireless AP, IP camera, VoIP, and industrial sensors through the network cable. It also meets the network environment that needs a high-density PoE power supply. It is suitable for intelligent transportation, rail transit, power industry, mining, petroleum, and industrial scenes such as shipping, metallurgy, and green energy construction forming a cost-effective, stable, and reliable communication network.

The ONV-IPS31064PFM adopts a new generation of high-performance hardware and software platforms. It can support security protection mechanisms, ACL/ QoS policies, and VLAN functions, and is easy to manage and maintain.

FEATURE

■ 10/100M access

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.
- ◇ Support 10/100M RJ45 port and Gigabit combo port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

■ Smart PoE power supply

- ◇ PoE network management, realize PoE port power allocation, priority setting, port power status viewing, time scheduling, etc.
- ◇ Comply with IEEE 802.3 af/at PoE standard, automatically identify PoE devices for power supply, and not damage non-PoE devices.
- ◇ The PoE port supports the priority mechanism. When the remaining power is insufficient, the power of the high-priority port is given priority to avoid overloading of the device.
- ◇ 4*10/100Base-TX RJ45 ports support PoE power, meeting the PoE power requirements of security monitoring, industrial automation systems, wireless coverage and other scenarios.

■ Strong business processing capability

- ◇ Support IEEE 802.1Q VLAN, Users can flexibly VLAN division and QinQ configuration.
- ◇ Support STP/RSTP/MSTP production tree protocol to eliminate layer 2 loops and realize link backup.
- ◇ Support static and dynamic aggregation to effectively increase link bandwidth, realize load balancing, link backup, and improve link reliability.
- ◇ Support QoS, port-based, 802.1P-based and DSCP-based three priority modes and four queue scheduling algorithms: Equ, SP, WRR, and SP+WRR.
- ◇ Support ACL to filter data packets by configuring matching rule processing operations and time permissions, and provide flexible security access control policies.
- ◇ Support IGMP V1/V2/V3 multicast protocol, IGMP Snooping meets multi-terminal high-definition video surveillance and video conference access requirements.

■ Security

- ◇ Port isolation and storm control.
- ◇ IP+MAC+port+VLAN quadruple flexible combination binding function.
- ◇ 802.1X authentication provides authentication functions for LAN computers and controls the authorization status of controlled ports according to the authentication results.

■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link, and PoE.
- ◇ Low power consumption, aluminum alloy housing, and excellent heat dissipation to ensure the stable operation of the switch.

■ Easy O&M management

- ◇ Support CPU monitoring and memory monitoring.
- ◇ Support HTTPS, SSLV3, SSHV1/V2, and other encryption methods, making management more secure.
- ◇ Support Web network management, SNMP V1/V2/V3 and other diversified management and maintenance.
- ◇ Support RMON, system log, and port traffic statistics to facilitate network optimization and transformation.
- ◇ Support LLDP to facilitate the network management system to query and judge the communication status of the link.

TECHNICAL SPECIFICATION


| Model | ONV-IPS31064PFM |
|----------------------------------|--|
| Interface Characteristics | |
| Fixed Port | 4*10/100Base-TX PoE ports (Data/Power) 2*10/100/1000Base-T uplink RJ45 ports (Data) |

| | |
|------------------------------|---|
| | 2*100/1000Base-X uplink SFP fiber ports (Combo port)(Data) 2 sets V+, V- redundant DC power port (5P industrial Phoenix terminal) |
| Ethernet Port | Port 1-4 can support 10/100Base-TX and port 5-6 can support 10/100/1000Base-T(X) auto-sensing, full/ half duplex MDI/ MDI-X self-adaption |
| Twisted Pair Transmission | 10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters) |
| Optical Fiber Port | Gigabit optical fiber port, default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC) |
| Optical Cable/ Distance | Multi-mode: 850nm/ 0-500m, Single-mode: 1310nm /0-40km, 1550nm/ 0-120km. |
| Chip Parameter | |
| Network Protocol | IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x |
| Forwarding Mode | Store and Forward (Full Wire Speed) |
| Switching Capacity | 14.8Gbps (non-blocking) |
| Forwarding Rate@64byte | 3.57Mpps |
| CPU(Hz) | 150M |
| DRAM | 256M |
| FLASH | 128M |
| MAC | 16K |
| Buffer Memory | 4M |
| Jumbo Frame | 10K |
| LED Indicator | POE: PoE (Green), Rate: Speed (Green), Power: PWR(Green), Network: Link, Link/Act (Yellow) |
| PoE& Power Supply | |
| PoE Port | Port 1-4 |
| PoE Management | Power delay start, PoE work, and time scheduling |


| | |
|-------------------------------------|---|
| | Port PoE working status display, Port PoE output power distribution |
| Power Supply Pin | 1/2(+) 3/6 (-) |
| Max Power Per Port | 30W, IEEE 802.3 af/at |
| Power Consumption | Standby<8W, Full load af<60W, at<120W |
| Input Voltage/ Interface | DC48-57V, 5P industrial Phoenix terminal, support anti-reverse protection. |
| Power Supply | No, optional 48V/60W or 48V/120W industrial power supply |
| Physical Parameter | |
| Operation Temp/ Humidity | -40~+75°C, 5%~90% RH Non condensing |
| Storage Temp/ Humidity | -40~+85°C, 5%~95% RH Non condensing |
| Dimension (L*W*H) | 145*134.5*47mm |
| Net /Gross Weight | 0.7kg/ 0.9kg |
| Installation | Desktop, 35mm DIN Rail |
| Certification & Warranty | |
| Lightning Protection | <p>Protection level: IP40</p> <p>Lightning protection: 6KV 8/20us</p> <p>IEC61000-4-3 (RS):10V/m (80~1000MHz)</p> <p>FCC Part 15/CISPR22 (EN55022): Class A</p> <p>IEC61000-6-2 (Common Industrial Standard)</p> <p>IEC61000-4-9 (Pulsed magnet field): 1000A/m</p> <p>IEC61000-4-10 (Damped oscillation): 30A/m 1MHz</p> <p>IEC61000-4-12/18 (Shockwave): CM 2.5kV, DM 1kV</p> <p>IEC61000-4-4(EFT): Power cable: ±4kV; data cable: ±2kV</p> <p>IEC61000-4-16 (Common-mode transmission): 30V, 300V, 1s</p> <p>IEC61000-4-2 (ESD): ±8kV contact discharge, ±15kV air discharge</p> <p>IEC61000-4-6 (Radio frequency transmission): 10V(150kHz~80MHz)</p> <p>IEC61000-4-8 (Power frequency magnetic field): 100A/m, 1000A/m, 1s-3s</p> <p>IEC61000-4-5 (Surge): Power cable: CM±4kV/ DM±2kV, data cable: ±4kV</p> |
| Mechanical Properties | <p>IEC60068-2-6 (Anti Vibration), IEC60068-2-27 (Anti Shock),</p> <p>IEC60068-2-32 (Free Fall)</p> |

| | |
|-----------------------------------|---|
| Certification | CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class A, RoHS |
| Warranty | 5 years, lifelong maintenance. |
| Network Management Feature | |
| Interface | IEEE802.3x flow control (Full-duplex) Broadcast storm control based on port speed Limit the rate of packet traffic on the incoming and outgoing ports with mini granularity 16Kbps |
| VLAN | IEEE802.1q, Port-based VLAN(4K), Protocol-based VLAN, QinQ configuration |
| Port Aggregation | LACP, Manual aggregation, Max 3 aggregation groups and 8 ports per group. |
| Spanning Tree | STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s) |
| Multicast | MLD Snooping, Multicast VLAN, Fast log-out IGMP Snooping v1/v2/v3, Max 64 multicast groups |
| Port Mirroring | Bidirectional data mirroring based on port |
| QoS | Diff-Serv QoS, 8*output queues of each port Queue Scheduling Algorithm (SP, WRR, SP+WRR) 802.1p/DSCP priority mapping, Priority Mark/ Remark |
| ACL | L2-L4 packet filtering function can match the first 80 bytes of the packet, and provide ACL based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port range, VLAN, etc. |
| Security | Binding function of IP+MAC+port Port isolation, Port broadcast storm suppression |
| DHCP | DHCP Client, DHCP Snooping, DHCP Relay |
| System | One-key recovery, NTP clock, System work log SNMP V1/V2/V3, Web Network Management (https) |

DIMENSION

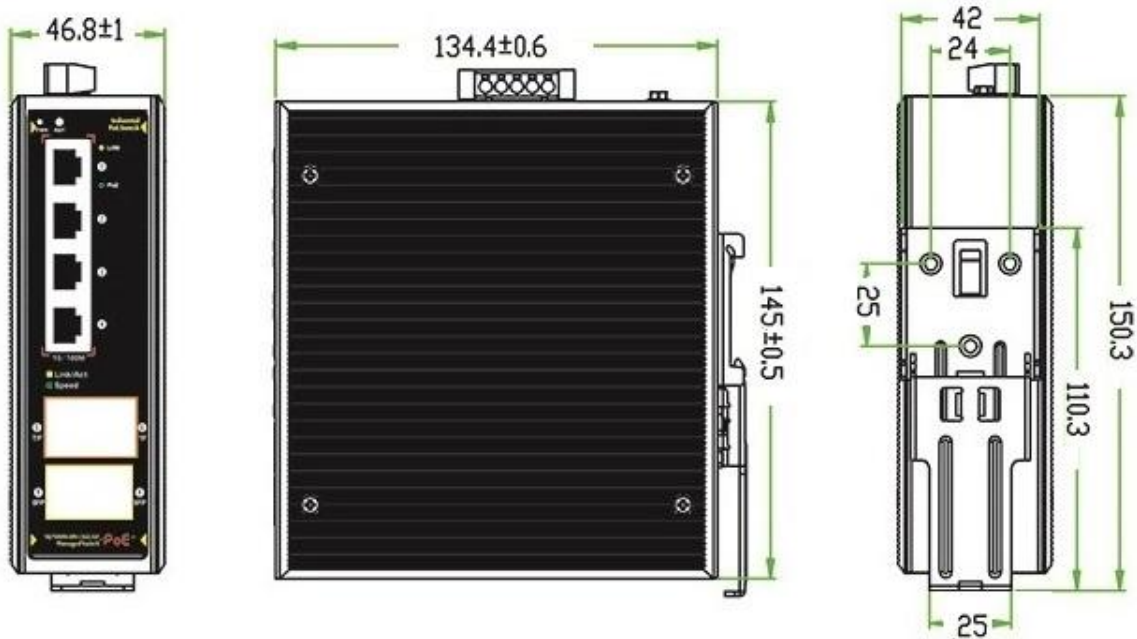

APPLICATION

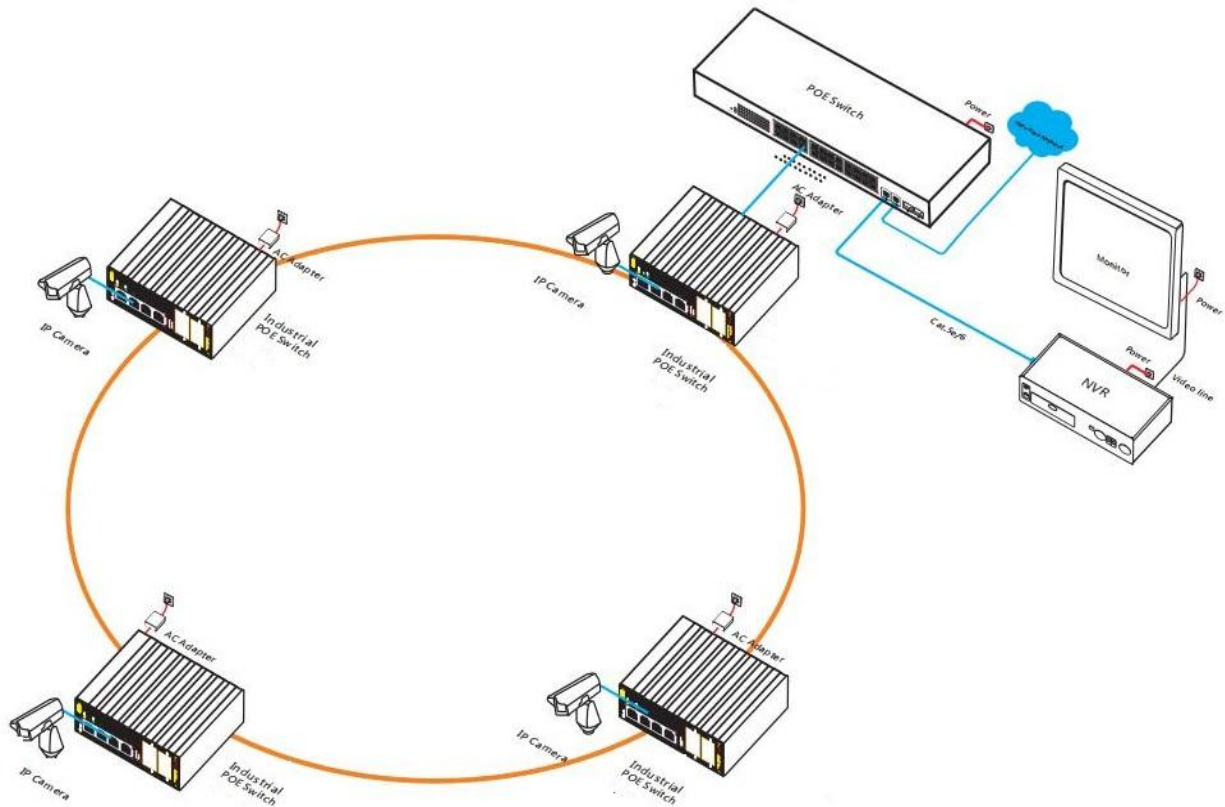

ORDERING INFORMATION

| Model | Description | Recommended Power Supply |
|-----------------|---|--------------------------|
| ONV-IPS31064PFM | L2 managed industrial PoE fiber switch with 4*10/100M RJ45 ports and 2*10/100/1000M uplink RJ45 ports and 2*100/1000M uplink SFP fiber combo ports. Port 1-4 can support IEEE 802.3 af/at PoE standard. It can support dual DC redundant power input and DIN rail mounting. | 60W/120W |

Note: The optical module and power supply are not included and need to be purchased.

PACKING LIST

| Packing List | Content | Qty | Unit |
|--------------|--|-----|------|
| | 6-port 10/100M managed industrial PoE switch | 1 | Set |
| | User Guide | 1 | PC |
| | Warranty Card and Certificate of Conformity | 1 | PC |

OPTICAL MODULE

| Product | Model | Description | Unit |
|---------------------------|----------|--|------|
| 1.25G Optica Module | 2630-G | Industrial SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface, supports DDM function and hot plugging. | PC |
| | 2632-G | Industrial SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging. | PC |
| | 2612-T-G | Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging. | PC |

| | | | |
|--|-------------|--|----|
| | 2613-R-G | Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging. | PC |
| | 2612-T-SC-G | Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface, supports DDM function and hot plugging. | PC |
| | 2613-R-SC-G | Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface, supports DDM function and hot plugging. | PC |

POWER SUPPLY

| Product | Model | Description | Unit |
|---------------------------------------|--------------|---|------|
| 60W DIN Rail Industrial Power Supply | GWS-DP60-48 | DIN Rai 60W single set of output power supply Input Voltage: AC100V-240V 50-60Hz, 1.0A Output Voltage: DC48V, 1.25A Operation Temperature:-40°C to +70°C | PC |
| 120W DIN Rail Industrial Power Supply | GWS-DP120-48 | DIN Rail 120W single set of output power supply Input Voltage: AC100V-240V 50-60Hz, 2.3A Output Voltage: DC48V, 2.5A Operation Temperature: -40°C to +70°C | PC |

RELATED PRODUCT

| Model | Description |
|-----------------|---|
| ONV-IPS31108PFM | L2 managed industrial PoE fiber switch with 8*10/100M RJ45 ports and 2*10/100/1000M uplink RJ45 ports and 2*100/1000M uplink SFP fiber combo ports. Port 1-8 can support IEEE 802.3 af/at PoE standard. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS33064PFM | L2+ managed industrial PoE fiber switch with 4*10/100/1000M RJ45 |

| | |
|---------------------|---|
| | ports and 2*100/1000M uplink SFP fiber ports. Port 1-4 can support IEEE 802.3 af/at PoE standard. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS33084PFM | L2+ managed industrial PoE fiber switch with 4*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. Port 1-4 can support IEEE 802.3 af/at PoE standard. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS33108PFM | L2+ managed industrial PoE fiber switch with 8*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP fiber ports. Port 1-8 can support IEEE 802.3 af/at PoE standard. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS33148PFM | L2+ managed industrial PoE fiber switch with 10*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. Port 1-8 can support IEEE 802.3 af/at PoE standard. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS33168PFM | L2+ managed industrial PoE fiber switch with 8*10/100/1000M RJ45 ports and 8*100/1000M uplink SFP fiber ports. Port 1-8 can support IEEE 802.3 af/at PoE standard. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS33168PFM-4GF | L2+ managed industrial PoE fiber switch with 12*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. Port 1-8 can support IEEE 802.3 af/at PoE standard. It can support dual DC redundant power input and DIN rail mounting. |

CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn



Skype: onv@onv.com.cn

WeChat ID: ONV-PoE-IoT

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333, Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

