

## Product Datasheet

# 6-port Gigabit Industrial bt PoE Switch

(ONV-IPS33064PF-bt)



## OVERVIEW

The ONV-IPS33064PF-bt is a Gigabit industrial bt PoE switch independently developed by ONV. It has 4\*10/100/1000M adaptive RJ45 ports and 2\*1000M uplink SFP fiber ports. Port 1-4 can support IEEE 802.3 af/at/bt PoE standard and the single-port PoE power output is 90W. As a PoE power supply device, it can automatically detect and recognize the power-receiving equipment that meets the standard and supply power through the network cable. It provides stable and safe terminals for PTZ network domes, high-power wireless AP, high-power network multimedia speakers, and high-power PoE lighting through a network cable to meet the network environment that needs a high-density PoE power supply. It is suitable for intelligent transportation, rail transit, electric power, mining, metallurgy, green energy, and industrial scenes such as construction to set up a cost-effective and stable communication network. Unmanaged mode, plug and play, no configuration, easy to use.

## FEATURE

### ■ Gigabit access

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit RJ45 ports and SFP fiber ports combination, high-speed high-bandwidth connection, to meet the networking needs of various scenarios.

### ■ Smart PoE power supply

- ◇ 4\*10/100/1000Base-T RJ45 ports can support bt PoE power supply, meeting the demand for super high power PoE power supply in various scenarios.
- ◇ Priority system for PoE port will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.
- ◇ The max single-port output power PoE is 90W backward compatibility IEEE802.3 af/at PoE power supply standard automatically identifies PoE devices for power supply without damaging non-PoE devices.

### ■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link/Act, and PoE.
- ◇ Low power consumption, aluminum alloy housing, and excellent heat dissipation to ensure stable operation of the switch.


## TECHNICAL SPECIFICATION

Model	ONV-IPS33064PF-bt
<b>Interface Characteristics</b>	
Fixed Port	2*1000Base-X uplink SFP fiber ports(Data) 4*10/100/1000Base-T bt PoE ports (Data/ Power) 2 set V+, V- redundant DC power port (5P industrial Phoenix terminal)


Ethernet Port	Port 1-4 can support 10/100/1000Base-T auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)
Optical Fiber Port	Default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)
Optical Cable/ Distance	Multi-mode: 850nm/ 0-550m, Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km.
<b>Chip Parameter</b>	
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3u 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	12Gbps (non-blocking)
Forwarding Rate@64byte	8.93Mpps
MAC	2K
Buffer Memory	2M
Jumbo Frame	9.2K
LED Indicator	Power: PWR (Green), Network: Link (Yellow), PoE: PoE (Green)
<b>PoE&amp; Power Supply</b>	
PoE Port	Port 1-4
Power Supply Pin	1/2(+) 3/6(-) 4/5(+) 7/8(-)
Max Power Per Port	90W, IEEE 802.3 af/at/bt
Power Consumption	Standby<6W, Full Load af<60W, at<120W, bt<240W
Input Voltage/ Interface	DC48-57V, 5P industrial Phoenix terminal, support anti-reverse protection.
Power Supply	No, optional 48V/240W industrial power supply
<b>Physical Parameter</b>	
Operation Temp/ Humidity	-40~+80°C, 5%~90% RH Non condensing
Storage Temp/ Humidity	-40~+85°C, 5%~95% RH Non condensing

Dimension (L*W*H)	119*100*30mm
Net /Gross Weight	0.4kg /0.5kg
Installation	Desktop, 35mm DIN Rail
<b>Certification&amp; Warranty</b>	
Lightning Protection	IEC61000-4-3 (RS):10V/m (80~1000MHz)
	FCC Part 15/CISPR22 (EN55022): Class A
	IEC61000-6-2 (Common Industrial Standard)
	IEC61000-4-9 (Pulsed magnet field): 1000A/m
	IEC61000-4-10 (Damped oscillation): 30A/m 1MHz
	IEC61000-4-12/18 (Shockwave): CM2.5kV, DM1kV
	Protection level: IP40, Lightning protection: 6KV 8/20us
	IEC61000-4-4(EFT): Power cable: ±4kV, data cable: ±2kV
	IEC61000-4-16 (Common-mode transmission): 30V, 300V, 1s
	IEC61000-4-2 (ESD): ±8kV contact discharge, ±15kV air discharge
Mechanical Properties	IEC61000-4-6 (Radio frequency transmission): 10V(150kHz~80MHz)
	IEC61000-4-8 (Power frequency magnetic field): 100A/m, 1000A/m, 1s-3s
Certification	IEC61000-4-5 (Surge): Power cable: CM±4kV/ DM±2kV, data cable: ±4kV
	IEC60068-2-6 (Anti Vibration), IEC60068-2-27 (Anti Shock), IEC60068-2-32 (Free Fall)
Warranty	5 years, lifelong maintenance.

## DIMENSION

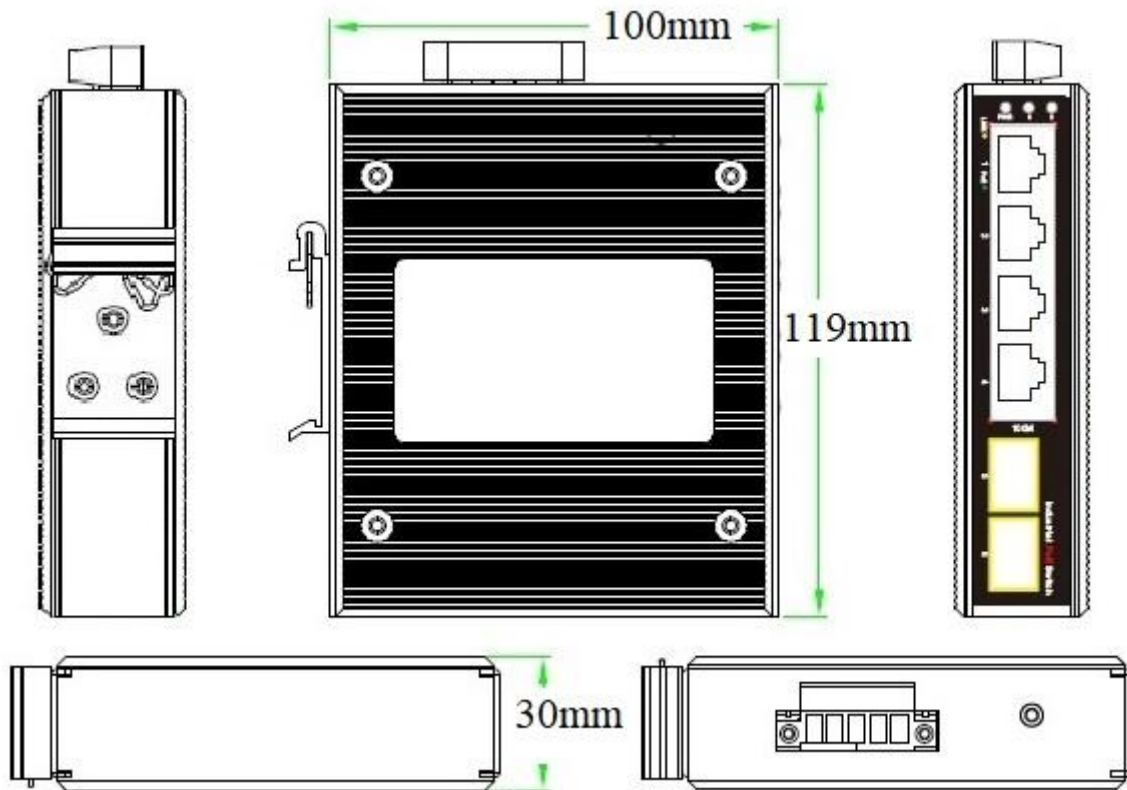

## APPLICATION

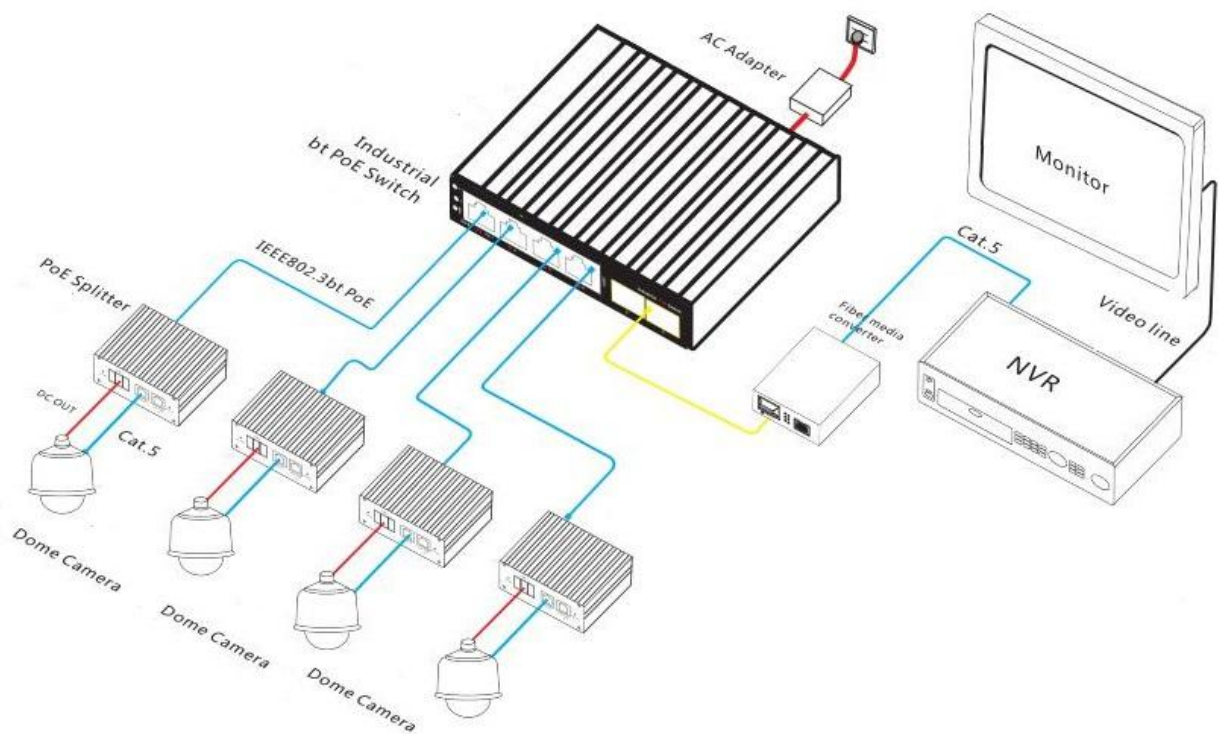

## ORDERING INFORMATION

Model	Description	Recommended Power Supply
ONV-IPS33064PF-bt	Unmanaged industrial bt PoE fiber switch with 4*10/100/1000M RJ45 ports and 2*1000M uplink SFP fiber ports. Port 1-4 can support IEEE 802.3 af/at/bt PoE standard. It can support dual DC redundant power input (Phoenix terminal connection) and DIN rail mounting.	240W

**Note:** The optical module and power supply are not included and need to be purchased.

## PACKING LIST

Packing List	Content	Qty	Unit
	6-port Gigabit industrial bt PoE switch	1	Set
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

## OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface, supports DDM function and hot plugging.	PC
	2632-G	Industrial SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	PC
	2612-T-G	Industrial SFP optical module, 1.25G single-mode single	PC

		fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	
	2613-R-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	PC
	2612-T-SC-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface, supports DDM function and hot plugging.	PC
	2613-R-SC-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface, supports DDM function and hot plugging.	PC
Power Module	2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC

## POWER SUPPLY

Product	Model	Description	Unit
240W DIN Rail Industrial Power Supply	GWS-DP240-48	DIN Rail 240W single set of output power supply Input Voltage: AC100V~240V 50-60Hz, 3.0A Output Voltage: DC48V, 5.0A Operation Temperature: -40°C to +70°C	PC

## RELATED PRODUCT

Model	Description
ONV-IPS31064P-bt	Unmanaged industrial bt PoE switch 6*10/100M RJ45 ports. Port 1-4 can support IEEE 802.3 af/at/bt PoE standard. It can support dual DC redundant power input (Phoenix terminal connection) and DIN rail mounting.
ONV-IPS33064P-bt	Unmanaged industrial bt PoE switch with 6*10/100/1000M RJ45 ports. Port 1-4 can support IEEE 802.3 af/at/bt PoE standard. It can support dual DC

	redundant power input (Phoenix terminal connection) and DIN rail mounting.
ONV-IPS33064PFG-bt	Unmanaged industrial bt PoE fiber switch with 5*10/100/1000M RJ45 ports and 1*1000M uplink SFP fiber port. Port 1-4 can support IEEE 802.3 af/at/bt PoE standard. It can support dual DC redundant power input (Phoenix terminal connection) and DIN rail mounting.
ONV-IPS33064PFM-bt	L2+ managed industrial bt PoE fiber switch with 4*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP fiber ports. Port 1- 4 can support IEEE 802.3 af/at/bt PoE standard. It can support dual DC redundant power input (Phoenix terminal connection) and DIN rail mounting.

## CONTACT US

**ONV** Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Skype: onv@onv.com.cn

WeChat ID: ONV-PoE-IoT

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333, Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

