

## Product Datasheet

# 36-port 10G Uplink Managed Industrial PoE Switch (ONV-IPS38036PFM)



## OVERVIEW

The ONV-IPS38036PFM is a 10G uplink managed industrial PoE switch independently developed by ONV. It has 24\*10/100/1000Base-T adaptive RJ45 ports and 8\*100/1000Base-X uplink SFP fiber ports and 4\*1/10G uplink SFP+ fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard and the single-port PoE power reaches 30W. As a PoE power supply device, it can automatically detect and recognize power-compliant devices that meet the standard and supply power through the network cable. It can supply power to PoE terminal equipment such as wireless AP, IP camera, VoIP, and industrial sensor through the network cable, and meet the network environment that needs a high-density PoE power supply. It is suitable for intelligent transportation, rail transit, power industry, mining, petroleum, and industrial scenes such as shipping, metallurgy, and green energy construction forming a cost-effective, stable, and reliable communication network.

The ONV-IPS38036PFM has L3 network management function, supports IPV4/IPV6 management, dynamic routing full line-speed forwarding, complete security protection mechanism, perfect ACL/QoS strategy, and rich VLAN functions for easy management and maintenance. It has leading ring network technology, supports a variety of industrial-grade redundant ring network protocols, and all ports can form rings. It supports chain, star, double star, ring, tangent ring, intersecting ring, coupled ring, and the ring

network recovery time within 20ms. It has high reliability, high security, and high manageability to ensure reliable transmission of key data. It supports remote management and cooperates with the ONV-NMS network management platform for cluster management to achieve full-process blind spot network management.

## FEATURE

### ■ Gigabit access, uplink 1/10G SFP+ fiber port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit RJ45 port and uplink 1/10G SFP+ fiber port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

### ■ Smart PoE power supply

- ◇ PoE network management, realize PoE port power allocation, priority setting, port power status viewing, time scheduling, etc.
- ◇ Comply with IEEE 802.3 af/at PoE standard, automatically identify PoE devices for power supply, and not damage non-PoE devices.
- ◇ The PoE port supports the priority mechanism. When the remaining power is insufficient, the power of the high-priority port is given priority to avoid overloading of the device.
- ◇ 24\*10/100/1000Base-T RJ45 ports support PoE power, meeting the PoE power requirements of security monitoring, industrial automation systems, wireless coverage and other scenarios.

### ■ Security

- ◇ Port isolation and storm control.
- ◇ IP+MAC+port+VLAN quadruple flexible combination binding function.
- ◇ 802.1X authentication provides authentication functions for LAN computers and controls the authorization status of controlled ports according to the authentication results.

### ■ Strong business processing capability

- ◇ Support ERPS ring network and STP/ RSTP/ MSTP to eliminate layer 2 loops and realize link backup.
- ◇ Support IEEE802.1Q VLAN, Users can flexibly divide VLAN, Voice VLAN, and QinQ configuration according to their needs.
- ◇ Support static and dynamic aggregation to effectively increase link bandwidth, realize load balancing, link backup, and improve link reliability.
- ◇ Support QoS, port-based, 802.1P-based, and DSCP-based three priority modes and four queue scheduling algorithms: Equ, SP, WRR, and SP+WRR.
- ◇ Support ACL to filter data packets by configuring matching rule processing operations and time permissions, and provide flexible security access control policies.
- ◇ Support IGMP V1/V2/V3 multicast protocol, IGMP Snooping meets multi-terminal high-definition video surveillance and video conference access requirements.

### ■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ Self-developed power supply, high redundancy design, providing a long-term and stable PoE power output.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, SYS, Link, L/A, and PoE.
- ◇ Low power consumption, with fan, galvanized steel metal housing, and excellent heat dissipation to ensure stable operation of the switch.

### ■ Easy O&M management

- ◇ Support CPU monitoring, memory monitoring, Ping detection, and cable length detection.
- ◇ HTTPS, SSLV3, SSHV1/V2, and other encryption methods are more secure in management.
- ◇ RMON, system log, and port traffic statistics are convenient for network optimization

and transformation.

- ◇ LLDP is convenient for the network management system to query and judge the communication status of the link.
- ◇ Support diverse management and maintenance methods such as Web network management, CLI command line (Console, Telnet), SNMP (V1/V2/V3), Telnet, etc.

## TECHNICAL SPECIFICATION

Model	ONV-IPS38036PFM	ONV-IPS38036PFM-at
<b>Interface Characteristics</b>		
Fixed Port	2*AC100-240V input ports 1*Console port (115200, N, 8,1) 4*1/10G uplink SFP+ fiber ports (Data) 8*100/1000Base-X uplink SFP fiber ports (Data) 24*10/100/1000Base-T PoE ports (Data/Power) 2*DC48-57V input ports (support reverse polarity protection)	
Ethernet Port	Port 1-24 can support 10/100/1000Base-T auto-sensing, full/ half duplex MDI/ MDI-X self-adaption	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)	
Optical Fiber Port	1/10G SFP+ optical fiber port, default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)	
Optical Cable/ Distance	Multi-mode: 850nm/ 0-550m, 850nm/ 0-300m(10G), Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km	
<b>Chip Parameter</b>		
Network Management Type	L3	
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX,	

	IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3ae 10GBase-SR/LR, IEEE 802.3x	
Forwarding Mode	Store and Forward (Full Wire Speed)	
Switching Capacity	176Gbps (non-blocking)	
Forwarding Rate@64byte	107.14Mpps	
CPU	500MHz	
DRAM	2G	
FLASH	128M	
MAC	32K	
Buffer Memory	32M	
Jumbo Frame	9.6K	
LED Indicator	Power: PWR (Yellow), System: SYS (Yellow), Network: Link/Act (Yellow), PoE: PoE (Green), Fiber port: L/A (Green)	
Reset Switch	Yes, Press and hold the reset switch for 10s and release it to restore the factory settings	
<b>PoE&amp; Power Supply</b>		
PoE Port	Port 1-24	
PoE Management	PoE power supply total power limit configuration Power delay start, PoE work and time scheduling Port PoE working status display, Port PoE output priority configuration Port PoE output power distribution, PoE on/off, af/at power distribution	
Power Supply Pin	1/2(+) 3/6 (-)	
Max Power Per Port	30W, IEEE 802.3 af/at	
Power Consumption	Standby<30W, Full Load<400W	Standby<35W, Full Load<600W
Power Input Interface	Built-in power supply, AC100~240V 50-60Hz, 5.0A	Built-in power supply, AC100~240V 50-60Hz, 6.6A
Power Input Port	Alarm switch port, 2*AC power input ports, 2*DC48-57V input ports Dual input power port design: AC power supply priority to support anti-reverse connection protection, and automatically switches to DC	

	connection when power fails.	
<b>Physical Parameter</b>		
Operation Temp/ Humidity	-40~+80°C, 5%~90% RH Non condensing	
Storage Temp/ Humidity	-40~+85°C, 5%~95% RH Non condensing	
Dimension (L*W*H)	440*378*44.5mm	
Net /Gross Weight	5.5kg/ 6.3kg	6.3kg/ 7.1kg
Installation	Desktop, 1U/19" cabinet	
<b>Certification&amp; Warranty</b>		
Lightning Protection	IEC61000-4-3(RS):10V/m (80~1000MHz)	
	FCC Part 15/CISPR22 (EN55022): Class A	
	IEC61000-6-2 (Common Industrial Standard)	
	IEC61000-4-9 (Pulsed magnet field): 1000A/m	
	IEC61000-4-10 (Damped oscillation): 30A/m, 1MHz	
	IEC61000-4-12/18 (Shockwave): CM 2.5kV, DM 1kV	
	Protection level: IP30, Lightning protection: 6KV 8/20us	
	IEC61000-4-4(EFT): Power cable:±4kV, Data cable: ±2kV	
	IEC61000-4-16 (Common-mode transmission): 30V, 300V, 1s	
	IEC61000-4-2 (ESD): ±8kV contact discharge, ±15kV air discharge	
Mechanical Properties	IEC61000-4-6 (Radio frequency transmission): 10V(150kHz~80MHz)	
	IEC61000-4-8 (Power frequency magnetic field):100A/m,1000A/m,1-3s	
	IEC61000-4-5( Surge): Power cable: CM±4kV/DM±2kV, Data cable: ±4kV	
Certification	IEC60068-2-6 (Anti Vibration), IEC60068-2-32 (Free Fall), IEC60068-2-27 (Anti Shock)	
	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class A, RoHS	
Warranty	5 years, lifelong maintenance.	
<b>Network Management Feature</b>		
Interface	IEEE802.3X (Full-duplex)	
	Port temperature protection setting	


	<p>No connection port automatic sleep</p> <p>Port green Ethernet Energy-saving setting</p> <p>Broadcast storm control based on port speed</p> <p>SFP+ optical port DDMI real-time digital diagnosis</p> <p>The speed limit of the message flow in the access port, mini particle size is 64Kbps.</p>
L3 Routing	<p>IPV4 Equal Cost Routing</p> <p>NG protocol max 1000 entries</p> <p>ARP protocol max 1000 entries</p> <p>IPV4/IPV6 VRRP max group is 255</p> <p>Pingv6, Telnetv6, TFTPv6, DNSv6, ICMPv6</p> <p>IPV4/IPV6 VLANIF interface supports up to 128</p> <p>IPV4/IPV6 static route/ default route supports up to 128 entries</p> <p>L3 network management function, IPV4/IPV6 dual-stack management</p> <p>IPV4 dynamic routing, RIPv1/v2, OSPFv2, BGP4+, 4000 routing entries</p> <p>IPV6 dynamic routing OSPFv3, BGP+, RIPv6, IPV6 management, 1000 routing entries</p> <p>L3 routing and forwarding, support communication between different network segments and different VLAN</p>
VLAN	<p>Voice VLAN, QinQ configuration, IEEE802.1q</p> <p>VLAN based on MAC, VLAN based on the protocol</p> <p>4K VLAN based on port, Port configuration of Access, Trunk, Hybrid.</p>
Port Aggregation	<p>LACP, Static aggregation, Max 18 aggregation groups and 8 ports per group.</p>
Spanning Tree	<p>STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)</p>
Ring Network Protocol	<p>G.8032 (ERPS), Recovery time less than 20ms. 250 Ring at most, Max 250 devices per ring.</p>
Multicast	<p>MLD Snooping, Multicast VLAN, Fast log out</p> <p>IGMP Snooping v1/v2, Max 1024 multicast groups</p>

Port Mirroring	Bidirectional data mirroring based on port
QoS	Flow-based redirection, Flow-based rate limiting Flow-based packet filtering, Priority Mark/Remark 8*Output queues of each port, 802.1p/ DSCP priority mapping Queue Scheduling Algorithm (SP, WRR, SP+WRR), Diff-Serv QoS
ACL	Port-based Issuing ACL, ACL based on port and VLAN L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc.
Security	ARP message rate limiting function Port broadcast message suppression SSL ensures data transmission security AAA& RADIUS& TACACS+ certification Limit the number of MAC addresses learned Port isolation, Host data backup mechanism Anti-DoS attack, ARP intrusion detection function Quadruple binding function of IP+MAC+VLAN+port IP source address protection, MAC address black hole User hierarchical management and password protection SSH 2.0 provides a secure encrypted channel for user login IEEE802.1X authentication/ centralized MAC address authentication
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	System work log, Link Layer Discovery Protocol NTP clock, Cable length detection, SNMP V1/V2/V3 Ping detection, Web network management (HTTPS) ONV-NMS platform cluster management (LLDP+SNMP) One click recovery, View CPU real-time utilization status FTP, TFTP, Xmodem, SFTP file upload and download management Console/ AUX Modem/ Telnet/ SSH2.0 CLI command line configuration




System	<p>Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher, Cat5 and above Ethernet cable</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, Mac OS X) installed on each computer in the network Cat5 and above Ethernet cable</p>
--------	---

## APPLICATION

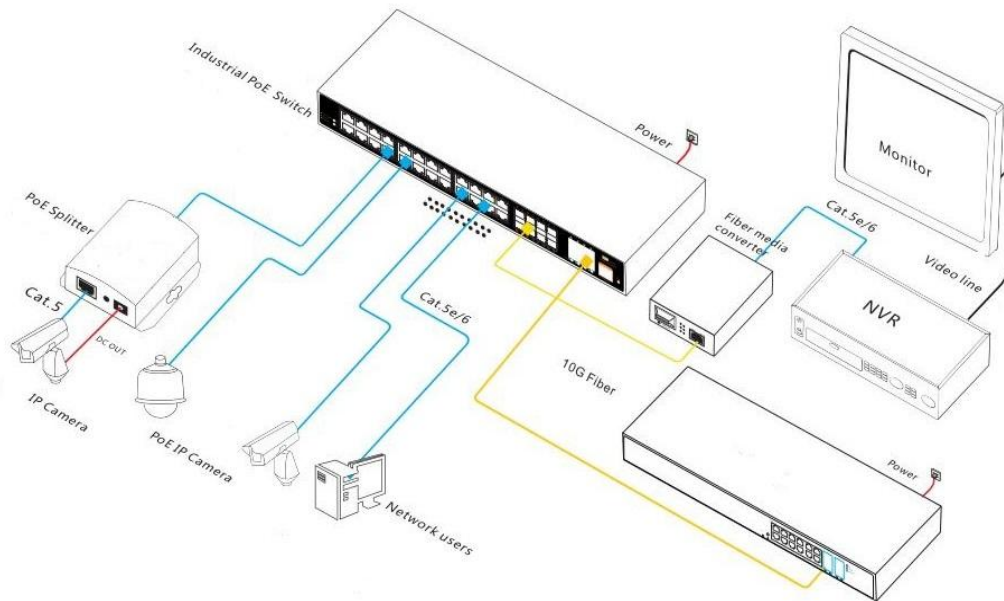

## DIMENSION

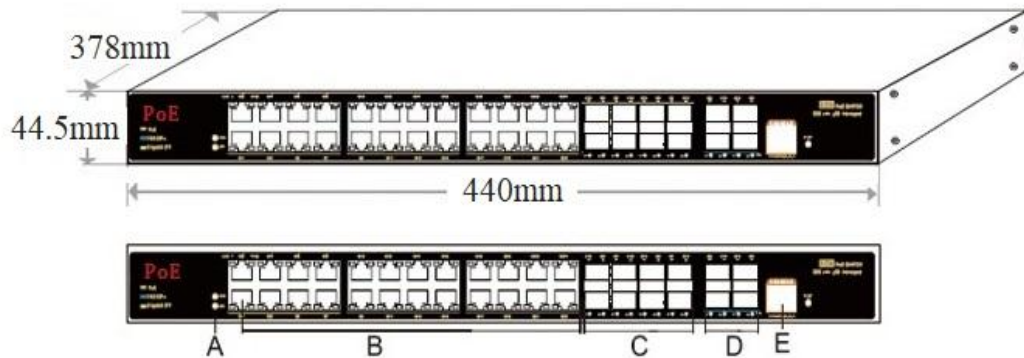

- A. Working indicator
- B. 24\*10/100/1000M PoE ports
- C. 8\*100/1000M uplink SFP fiber ports
- D. 4\*1/10G uplink SFP+ fiber ports
- E. Console port

## ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV-IPS38036PFM	L3 managed industrial PoE switch with 24*10/100/1000M RJ45 ports and 8*100/1000M SFP fiber ports and 4*1/10G uplink SFP+ fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard. It built-in power supply and 1U/19" cabinet installation.	2*400W
ONV-IPS38036PFM-at		2*600W

**Note:** The optical module is not included and needs to be purchased separately.

## PACKING LIST

	Content	Qty	Unit
Packing List	36-port 10G uplink managed industrial PoE switch	1	Set
	RJ45-DB9 Adapter Cable	1	PC
	AC Power Cable	1	PC
	Mounting Kits (Hanging Ear)	1	Set
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

## OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface, supports DDM function and hot plugging.	PC
	2632-G	Industrial SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, supports	PC

		DDM function and hot plugging.	
	2612-T-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	PC
	2613-R-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	PC
	2612-T-G-SC	Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface, supports DDM function and hot plugging.	PC
	2613-R-G-SC	Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface, supports DDM function and hot plugging.	PC
10G Optical Module	6630-G	Industrial SFP+ optical module, 10G multi-mode dual fiber 850nm, transmission distance: 300m, LC interface, supports DDM function and hot plugging.	PC
	7832-G	Industrial SFP+ optical module, 10G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	PC
	7832-33-G	Industrial SFP+ optical module, 10G single-mode single fiber TX1330nm/ RX1270nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	PC
	7832-27-G	Industrial SFP+ optical module, 10G single-mode single fiber TX1270nm/ RX1330nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	PC

## RELATED PRODUCT

Model	Description
ONV-IPS38168PFM	L3 managed industrial PoE switch with 12*10/100/1000M RJ45 ports and 4*1/10G uplink SFP+ fiber ports. Port 1-8 can support IEEE 802.3 af/at PoE standard. It can support dual DC redundant power input and DIN rail mounting.
ONV-IPS38028PFM	L3 managed industrial PoE switch with 24*10/100/1000M RJ45 ports and 4*1/10G uplink SFP+ fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard. It built-in power supply and 1U/19" cabinet installation.
ONV-IPS38048PFM	L3 managed industrial PoE switch with 48*10/100/1000M RJ45 ports and uplink SFP+ fiber ports. Port 1-48 can support IEEE 802.3 af/at PoE standard. It built-in power supply and 1U/19" cabinet installation.

## CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT

Email: onv@onv.com.cn

Skype: onv@onv.com.cn

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333,

Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

