

Product Datasheet

16-port Gigabit Easy Managed Industrial Ethernet Switch (ONV-IPS53168FMA)



OVERVIEW

The ONV-IPS53168FMA is a Gigabit Easy managed industrial Ethernet switch independently developed by ONV. It has 8*10/100/1000Base-T adaptive RJ45 ports and 8*1000Base-X SFP fiber ports. Each port can support wire-speed forwarding. It has excellent adaptability to industrial field environments (including mechanical stability, climate environment adaptability, electromagnetic environment adaptability, etc.). It is suitable for industrial scenarios such as intelligent transportation, rail transportation, power industry, mining, petroleum, shipping, metallurgy, and green energy construction to form an economical, efficient, stable, and reliable communication network.

The ONV-IPS53168FMA supports the ONV cloud platform and APP cloud management to realize security network topology management, port management, remote operation and maintenance, and other functions. It has high reliability, is easy to install and maintain,

has fast switching capabilities, and multiple access ports, making it suitable for access to LAN devices of various sizes.

FEATURE

■ Gigabit access, uplink SFP fiber port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit RJ45 port and uplink Gigabit SFP fiber port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

■ Minimalist application

- ◇ Support real-time fault alarm and fault location.
- ◇ Support remote upgrade, remote restart, and restore to factory settings.
- ◇ Support cloud platform and APP cloud management, visualized port control, network topology management, and VLAN division.
- ◇ Web network management function, QoS, link aggregation, ring network management, port mirroring, port control, and bandwidth management.

■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, SYS, and Link.
- ◇ Low power consumption, aluminum alloy housing, and excellent heat dissipation to ensure the stable operation of the switch.

■ Rich port combination

- ◇ The chip integrates 8 Gigabit RJ45 ports PHY, and a single chip can support 8*10/100/1000M RJ45 ports and 8*1000M SFP fiber ports. It can be expanded to flexibly support port forms with different optical and electrical combinations.

■ Flexible shared cache

- ◇ For scenarios such as video and industrial access, the chip provides a built-in flexible shared cache to meet the requirements of business traffic bursts.


TECHNICAL SPECIFICATION

Model	ONV-IPS53168FMA
Interface Characteristics	
Fixed Port	8*1000Base-X uplink SFP fiber ports (Data) 8*10/100/1000Base-T RJ45 ports (Data) 2 set V+, V- redundant DC power port (5Pin Phoenix terminal)
Ethernet Port	Port 1-8 can support 10/100/1000Base-T auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e/6 or later UTP (≤100 meters)
Optical Fiber Port	Default no include optical modules (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)
Optical Cable/ Distance	Multi-mode: 850nm/ 0-550m, Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km
Chip Parameter	
Network Management Type	L2
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X, IEEE802.3x
Forwarding Mode	Store and forward (Full wire speed)
Switching Capacity	56Gbps (non-blocking)
Forwarding Rate@64byte	23.81Mpps
MAC	8K
Buffer Memory	3M

Jumbo Frame	9.6K
LED Indicator	Power/ System: SYS(Green), Network: Link (Yellow), PoE: PoE (Green), Fiber port: L/A (Green)
Reset Switch	Press for 6 seconds and then release to restore to factory settings Short press twice (1 second interval) to switch to unmanaged state
Power Supply	
Power Consumption	Standby<8W, full load<18W
Input Voltage/ Interface	DC12-57V, 5Pin industrial Phoenix terminal, support anti-reverse protection
Power Supply	No, optional 12V/24W or 24V/24W industrial power supply
Physical Parameter	
Operation Temp/ Humidity	-40~75°C, 5%~90% RH non condensing
Storage Temp/ Humidity	-40~80°C, 5%~95% RH non condensing
Dimension (L*W*H)	165*148*54mm
Net /Gross Weight	1.1kg/ 1.3kg
Installation	Desktop, 35mm DIN Rail
Certification& Warranty	
Lightning Protection	IEC61000-4-3 (RS):10V/m (80-1000MHz) FCC Part 15/CISPR22 (EN55022): Class A IEC61000-6-2 (Common Industrial Standard) IEC61000-4-9 (Pulsed magnet field): 1000A/m IEC61000-4-10 (Damped oscillation): 30A/m 1MHz IEC61000-4-12/18 (Shockwave): CM2.5kV, DM1kV Protection level: IP40, Lightning protection: 6KV 8/20us IEC61000-4-4(EFT): Power cable: ±4kV, data cable: ±2kV IEC61000-4-16 (Common-mode transmission): 30V, 300V, 1s IEC61000-4-2 (ESD): ±8kV contact discharge, ±15kV air discharge IEC61000-4-6 (Radio frequency transmission): 10V(150kHz~80MHz) IEC61000-4-8 (Power frequency magnetic field): 100A/m, 1000A/m, 1s-3s IEC61000-4-5 (Surge): Power cable: CM±4kV/ DM±2kV, data cable: ±4kV

Mechanical Properties	IEC60068-2-6 (Anti Vibration), IEC60068-2-27 (Anti Shock), IEC60068-2-32 (Free Fall)
Certification	CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class A, RoHS
Warranty	5 years, lifelong maintenance.
Software	
Interface	Port traffic statistics, IEEE802.3x flow control (Full-duplex) Port status display, Port duplex/ negotiation rate configuration
Spanning Tree	STP/RSTP
VLAN	Port-based IEEE802.1Q VLAN configuration (4K)
Port Aggregation	Static aggregation, LACP
Multicast	IGMP Snooping v1/v2, Max 256 multicast groups
Mirroring	Support basic port traffic mirroring
QoS	Congestion avoidance, Flow classification based on CoS/DSCP Shaping based on port and queue, ACL based on L2/L3/L4/UDF 8* Output queues per port, support SP/WDRR/SP+WDRR scheduling
Security	Black hole MAC, 48*CPU queue protection Port speed limit, Port-based broadcast storm suppression Port isolation, VLAN-based isolation between physical ports Broadcast storm control, Port-based MAC learning number limit
Management	Mobile APP operation and maintenance management ONV cloud platform management, One-key recovery, Web Management
System	Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher, Cat5 and above Ethernet cable TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, Mac OS X) installed on each computer in the network Cat5 and above Ethernet cable

DIMENSION

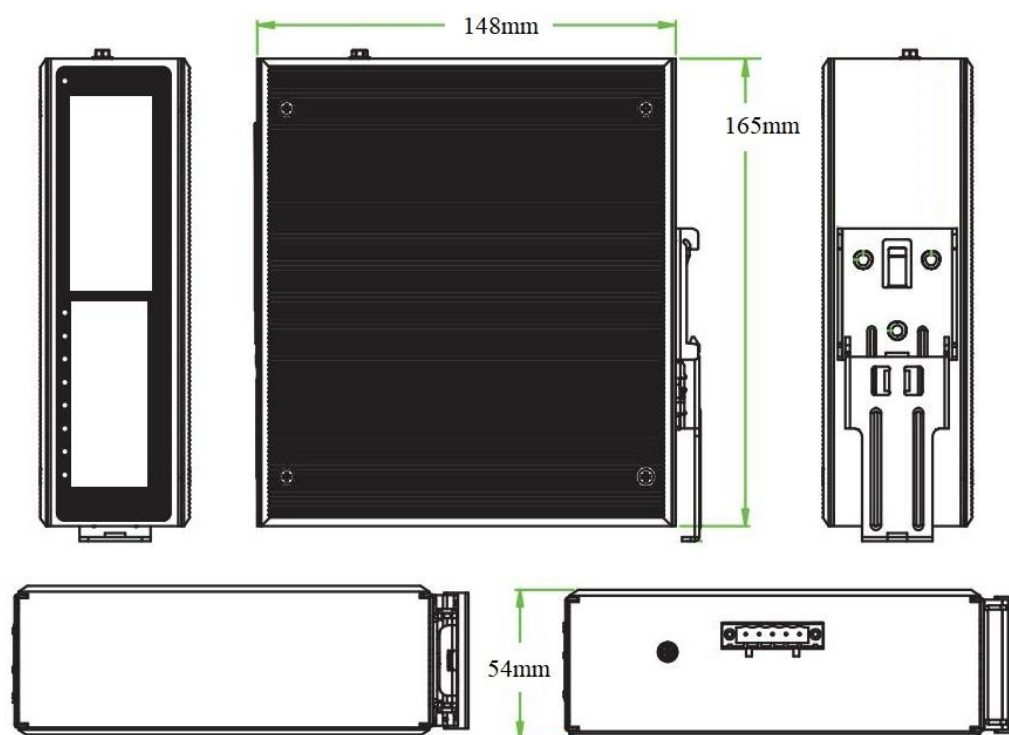

APPLICATION

ORDERING INFORMATION

Model	Description	Recommended Power Supply
ONV-IPS53168FMA	Easy managed industrial Ethernet switch with 8*10/100/1000M RJ45 ports and 8*1000M uplink SFP fiber ports. It can support dual DC redundant power input (Phoenix terminal connection) and DIN rail mounting.	24W

Note: The optical module and power supply are not included and need to be purchased.

PACKING LIST

	Content	Qty	Unit
Packing List	16-port Gigabit Easy managed industrial Ethernet switch	1	Set
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface, supports DDM function and hot plugging.	PC
	2632-G	Industrial SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	PC
	2612-T-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	PC

	2613-R-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface, supports DDM function and hot plugging.	PC
	2612-T-G-SC	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface, supports DDM function and hot plugging.	PC
	2613-R-G-SC	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface, supports DDM function and hot plugging.	PC

POWER SUPPLY

Product	Model	Description	Unit
24W DIN Rail Industrial Power Supply	GWS-DP24-12	DIN Rail 24W single set of output power supply Input Voltage: AC100V-240V 50-60Hz, 0.35A Output Voltage: DC12V, 2.0A Operation Temperature: -40℃~70℃	PC
24W DIN Rail Industrial Power Supply	GWS-DP24-24	DIN Rail 24W single set of output power supply Input Voltage: AC100V-240V 50-60Hz, 0.35A Output Voltage: DC24V, 1.0A Operation Temperature: -40℃~70℃	PC

CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT

Email: onv@onv.com.cn

Skype: onv@onv.com.cn



Teams: onv@onv.com.cn

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333,
Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

