

Product Datasheet

19-port Gigabit PoE Switch

(ONV-H3016PFD)



OVERVIEW

The ONV-H3016PFD is a Gigabit PoE fiber switch independently developed by ONV. It has 18*10/100/1000Base-T RJ45 ports and 1*1000Base-X uplink SFP fiber port. Port 1-16 can support PoE+ power supply and single-port PoE power up to 30W. As a PoE power supply device, it can automatically detect and recognize the power-receiving equipment that meets the standard and supply power through the network cable. It can supply power to PoE terminal equipment such as wireless AP, IP camera, VoIP phone, video access control intercom, etc., through a network cable to meet the network environment that needs a high-density PoE power supply. It is suitable for hotels, campuses, factory quarters, and small and medium-sized enterprises to form an economically efficient network. Unmanaged mode, plug and play, no configuration, easy to use.

FEATURE

■ Gigabit access, uplink RJ45/SFP fiber port

- ◇ Support non-blocking wire-speed forwarding for smoother transmission.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Provide Gigabit RJ45 ports and uplink SFP port for flexible networking and meets the networking requirements of various scenarios.

■ Smart PoE power supply

- ◇ Comply with PoE+ power supply, automatically identify PoE devices for power without damaging non-PoE devices.
- ◇ 16*10/100/1000Base-T RJ45 ports support PoE power to meet the needs of PoE power in various scenarios in the security field.
- ◇ Port 9-16 can support the watchdog function, which automatically detects the data communication status in real-time. When the port communication fails, the corresponding port PoE will automatically restart and repair the network communication by itself.

■ Innovative function

- ◇ **Long-distance mode (E):** When switched to the ON position (default off), the port 9-16 rate is 10M, and the transmission distance is up to 250 meters.

■ Stable and reliable


- ◇ CCC, CE, FCC, RoHS.
- ◇ Plug and play, no configuration, simple and convenient.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link, and PoE.
- ◇ Low power consumption, with fan, galvanized steel housing, and excellent heat dissipation to ensure the stable operation of the switch.

TECHNICAL SPECIFICATION

Model	ONV-H3016PFD
Interface Characteristics	
Fixed Port	1*1000Base-X uplink SFP fiber port (Data) 2*10/100/1000Base-T uplink RJ45 ports (Data) 16*10/100/1000Base-T PoE ports (Data/ Power)
Ethernet Port	Port 1-18 can support 10/100/1000Base-T(X) auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤250 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)
Optical Fiber Port	Default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)
Optical Cable/ Distance	Multi-mode: 850nm/ 0-550m, Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km
Function Switch	E file: long-distance function (Default-OFF, enable-ON), when opening, port 9-16 support 10M/250 meters transmission
Chip Parameter	
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X, IEEE802.3x
Forwarding Mode	Store and forward(Full wire speed)
Switching Capacity	38Gbps (non-blocking)
Forwarding Rate@64byte	28.28Mpps
MAC	4K
Buffer Memory	4M
Jumbo Frame	9.2K
LED Indicator	Power: PWR (Green), Network: Link (Green), PoE: PoE (Red), Function switch: EXTEND (Green)

PoE& Power Supply	
PoE Port	Port 1-16
Power Supply Pin	1/2(+) 3/6(-)
Max Power Per Port	30W, PoE+
Total PWR/ Input Voltage	250W/ (AC100-240V)
Power Consumption	Standby<12W, full load<250W
Power Supply	Built-in power supply, AC100~240V 50-60Hz, 4.1A
Physical Parameter	
Operation Temp/ Humidity	-20°C~55°C, 5%~90% RH non condensing
Storage Temp/ Humidity	-40°C~80°C, 5%~95% RH non condensing
Dimension (L*W*H)	350*215*44mm
Net /Gross Weight	2.0kg/ 2.5kg
Installation	Desktop, Rack mounted
Certification& Warranty	
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15, RoHS
Warranty	1 year, lifelong maintenance.

DIMENSION

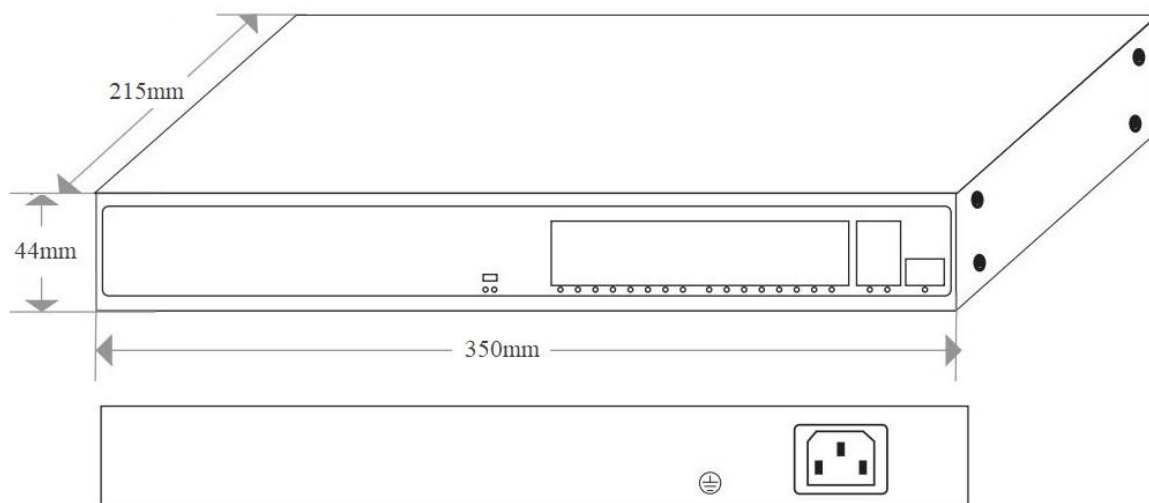

ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV-H3016PFD	PoE switch with 18*10/100/1000M RJ45 ports and 1*1000M uplink SFP fiber port. Ports 1-16 can support PoE+ standard. Adjust the function switch, ports 9-16 can support 10M/250 meters transmission. Built-in power supply.	52V/250W

Note: The optical module is not included and needs to be purchased.

PACKING LIST

	Content	Qty	Unit
Packing List	19-port Gigabit PoE switch	1	Set
	AC Power Line	1	PC
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630	SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. support DDM function and hot plugging.	PC
	2632	SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	2612-T	SFP optical module, 1.25G single-mode single fiber	PC

		TX1310nm/ RX1550nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	
	2613-R	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	2612-T-SC	SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. support DDM function and hot plugging.	PC
	2613-R-SC	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. support DDM function and hot plugging.	PC
Power Module	2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC

CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Skype: onv@onv.com.cn

Teams: onv@onv.com.cn

WeChat ID: ONV-PoE-IoT

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333, Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

