

## Product Datasheet

# 10-port Gigabit L2+ Managed Industrial Ethernet Switch (ONV-IPS33010FM)



## OVERVIEW

The ONV-IPS33010FM is a Gigabit L2+ managed industrial Ethernet fiber switch independently developed by ONV. It has 8\*10/100/1000Base-T adaptive RJ45 ports and 2\*100/1000Base-X uplink SFP fiber ports. Each port can support wire-speed forwarding.

The ONV-IPS33010FM has L2+ network management functions, supports IPV4 management, static routing forwarding, complete security protection mechanism, perfect ACL/QoS strategy, and rich VLAN functions for easy management and maintenance. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) to improve link backup and network reliability. When a unidirectional network fails, communication can be quickly restored to ensure uninterrupted communication of important applications.

According to application needs, port management, routing address management, port flow control, VLAN division, IGMP, security strategy, and other application business configurations can be performed through network management methods such as Web, CLI, SNMP, Telnet, etc. It is suitable for industrial scenarios such as intelligent transportation, rail transportation, power industry, mining, petroleum, shipping, metallurgy, and green energy construction to form an economical, efficient, stable, and reliable communication network.

## FEATURE

### ■ Gigabit access, uplink SFP fiber port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.
- ◇ Support RJ45 port and SFP fiber port combination which enables users to flexibly build networking to meet the needs of various scenarios.

### ■ Security

- ◇ Port isolation and storm control.
- ◇ IP+MAC+port+VLAN quadruple flexible combination binding function.
- ◇ 802.1X authentication provides authentication functions for LAN computers and controls the authorization status of controlled ports according to the authentication results.

### ■ Strong business processing capability

- ◇ Support ERPS ring network and STP/RSTP/MSTP to eliminate layer 2 loops and realize link backup.
- ◇ IEEE 802.1Q VLAN, users can flexibly divide VLANs according to their needs, and support QinQ configuration.
- ◇ Support static and dynamic aggregation to effectively increase link bandwidth, realize load balancing, link backup, and improve link reliability.
- ◇ Support QoS, port-based, 802.1P-based and DSCP-based three priority modes and four queue scheduling algorithms: Equ, SP, WRR, and SP+WRR.
- ◇ Support ACL to filter data packets by configuring matching rule processing operations and time permissions, and provide flexible security access control policies.
- ◇ Support IGMP V1/V2/V3 multicast protocol, IGMP Snooping meets multi-terminal high-definition video surveillance and video conference access requirements.

### ■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.

- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, SYS, and Link.
- ◇ Low power consumption, no fan, aluminum shell, and excellent heat dissipation to ensure the stable operation of the switch.

### ■ Easy O&M management

- ◇ Support CPU monitoring, memory monitoring, Ping detection, and cable length detection.
- ◇ Support RMON, system log, and port traffic statistics to facilitate network optimization and transformation.
- ◇ Support HTTPS, SSLV3, SSHV1/V2, and other encryption methods, making management more secure.
- ◇ Support LLDP to facilitate the network management system to query and judge the communication status of the link.
- ◇ Support Web network management, CLI command line (Console, Telnet), SNMP (V1/V2/V3), and other diversified management and maintenance.

## TECHNICAL SPECIFICATION

| Model                            | ONV-IPS33010FM  |
|----------------------------------|---|
| <b>Interface Characteristics</b> |   |
| Fixed Port                       | 1*Console port (115200,N,8,1)<br>8*10/100/1000Base-T RJ45 ports (Data)<br>2*100/1000Base-X uplink SFP fiber ports (Data)<br>2 set of V+, V- redundant DC power interface (5 Pin Phoenix terminal) |
| Ethernet Port                    | Port 1-8 support 10/100/1000Base-T auto-sensing, full/ half duplex MDI/ MDI-X self-adaption   |
| Twisted Pair Transmission        | 10BASE-T: Cat3,4,5 UTP (≤100 meters)<br>100BASE-TX: Cat5 or later UTP (≤100 meters)<br>1000BASE-T: Cat5e or later UTP (≤100 meters)   |


|                            |  |
|----------------------------|--|
| Optical Fiber Port         | Gigabit optical fiber interface, default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC) |
| Optical Cable/<br>Distance | Multi-mode: 850nm/ 0-500m, Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km.   |
| <b>Chip Parameter</b>      |  |
| Network<br>Management Type | L2+  |
| Network Protocol           | IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x                    |
| Forwarding Mode            | Store and Forward (Full Wire Speed)  |
| Switching Capacity         | 20Gbps (non-blocking)  |
| Forwarding<br>Rate@64byte  | 14.88Mpps  |
| CPU(Hz)                    | 500M   |
| DRAM                       | 1G   |
| Flash                      | 128M   |
| MAC                        | 8K   |
| Buffer Memory              | 4.1M   |
| Jumbo Frame                | 10K  |
| LED Indicator              | Power: PWR (Green), System: SYS (Green), Network: Link (Yellow), Fiber port: L/A (Green)   |
| Reset Switch               | Yes, Press and hold the reset switch for 10s and release it to restore the factory settings  |
| <b>Power Supply</b>        |  |
| Working Voltage            | DC12-48V, 5 Pin industrial Phoenix terminal, support anti-reverse protection.  |
| Power Consumption          | Standby<8W, Full load<12W  |
| Power Supply               | No, optional 24V/24W industrial power supply   |
| <b>Physical Parameter</b>  |  |
| Operation TEMP /           | -40~+80°C, 5%~90% RH Non condensing  |

|                                     |   |
|-------------------------------------|---|
| Humidity                            |   |
| Storage TEMP / Humidity             | -40~+85°C, 5%~95% RH Non condensing   |
| Dimension (L*W*H)                   | 145*134.5*47mm  |
| Net /Gross Weight                   | 0.85kg / 1.1kg  |
| Installation                        | Desktop, 35mm DIN Rail  |
| <b>Certification &amp; Warranty</b> |   |
| Lightning Protection                | Protection level: IP40<br>Lightning protection: 6KV 8/20us<br>IEC61000-4-3 (RS):10V/m (80~1000MHz)<br>FCC Part 15/CISPR22 (EN55022): Class B<br>IEC61000-6-2 (Common Industrial Standard)<br>IEC61000-4-9 (Pulsed magnet field): 1000A/m<br>IEC61000-4-10 (Damped oscillation): 30A/m, 1MHz<br>IEC61000-4-12/18 (Shockwave): CM 2.5kV, DM 1kV<br>IEC61000-4-4(EFT): Power cable:±4kV, Data cable: ±2kV<br>IEC61000-4-16 (Common-mode transmission): 30V, 300V, 1s<br>IEC61000-4-2 (ESD): ±8kV contact discharge, ±15kV air discharge<br>IEC61000-4-6 (Radio frequency transmission): 10V(150kHz~80MHz)<br>IEC61000-4-8 (Power frequency magnetic field):100A/m, 1000A/m, 1s-3s<br>IEC61000-4-5 (Surge): Power cable: CM±4kV/ DM±2kV, Data cable: ±4kV |
| Mechanical Properties               | IEC60068-2-6 (Anti Vibration), IEC60068-2-32 (Free Fall), IEC60068-2-27 (Anti Shock)  |
| Certification                       | CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS   |
| Warranty                            | 5 years, lifelong maintenance.  |
| <b>Network Management Feature</b>   |   |
| Interface                           | IEEE 802.3x flow control (Full duplex)<br>Broadcast storm control based on port speed<br>Port real-time traffic management (Flow Interval)  |


|                  |   |
|------------------|---|
|                  | Limit the speed of the message traffic at the inbound and outbound ports mini granularity is 16Kbps, and max granularity is 1Gbps   |
| L3 Feature       | ARP protocol, max 1024 entries<br>L2+ network management function<br>IPV4 static route/ default route, max 128 entries  |
| VLAN             | Port configuration of Access, Trunk, Hybrid<br>4K VLAN based on port, IEEE802.1q, VLAN based on the protocol  |
| Port Aggregation | LACP dynamic aggregation, static aggregation<br>Max 5 aggregation groups, per group support up to 8 ports   |
| Spanning Tree    | STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)  |
| Multicast        | Multicast VLAN, User quick exit mechanism<br>IGMP Snooping v1/v2/v3, Max 1024 multicast groups  |
| Port Mirroring   | Bidirectional data mirroring based on port  |
| QoS              | Queue Scheduling Algorithm (SP, WRR, SP+WRR)<br>Flow-based rate limiting, Flow-based packet filtering<br>Flow-based redirection, Diff-Serv QoS, Priority Mark/ Remark<br>8*Output queues of each port, 802.1p/DSCP priority mapping   |
| ACL              | ACL issued based on port and VLAN<br>L2-L4 packet filtering function can match the first 80 bytes of the message and provide ACL definition based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.   |
| Security         | Port-based IEEE802.1X authentication<br>User hierarchical management and password protection<br>DoS attack prevention, Port broadcast message suppression<br>SSH 2.0, provides a secure encrypted channel for user login<br>Port isolation, IP+MAC+VLAN+port four-way binding function<br>IP source address protection, ARP message rate limit function<br>Host data backup mechanism, ARP intrusion detection function |

|            |  |
|------------|--|
|            | MAC address the black hole, SSL ensures data transmission security<br>AAA&RADIUS authentication, MAC address the learning number limit   |
| DHCP       | DHCP Client, DHCP Snooping, DHCP Server  |
| Management | One-click restore, NTP clock, Ping detection<br>System work log, Link layer discovery protocol LLDP<br>Cable status check, Web network management<br>ONV-NMS platform cluster management (LLDP+SNMP)<br>SNMP V1/V2/V3, CPU real-time utilization status check<br>FTP, TFTP, Xmodem, SFTP file upload and download management<br>Console/AUX Modem/Telnet/SSH2.0 CLI command line configuration |
| System     | Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher, Cat5 and above Ethernet cable<br>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, Mac OS X) installed on each computer in the network Cat5 and above Ethernet cable   |

## DIMENSION

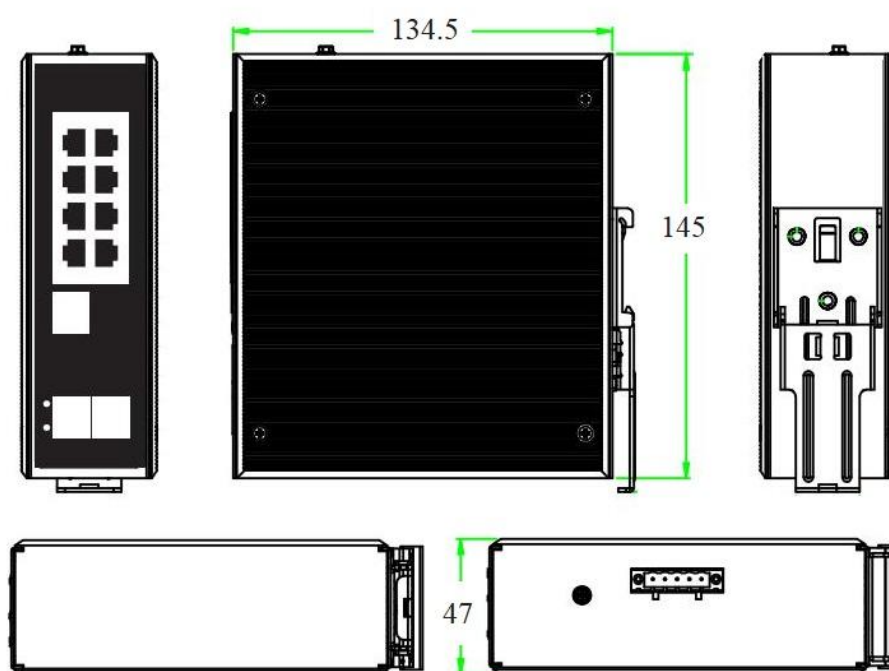

## APPLICATION

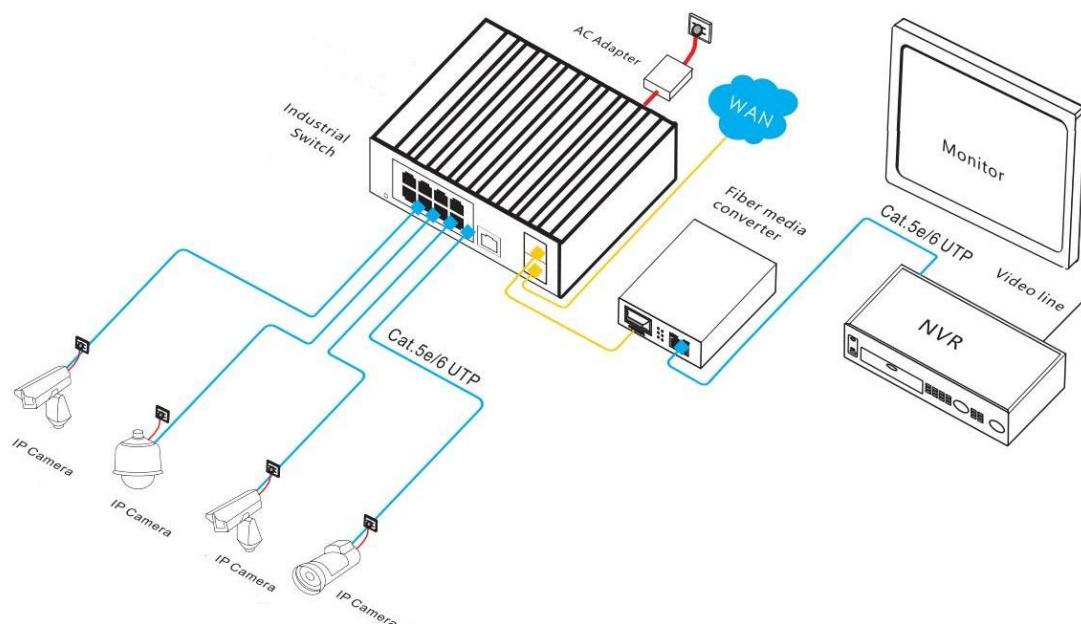

## ORDERING INFORMATION

| Model   | Description  | Recommended Power Supply |
|---|--|--------------------------|
| ONV-IPS33010FM  | L2+ managed industrial Ethernet fiber switch with 8*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP fiber ports. It can support dual DC power supply input and DIN rail mounting. | 24V/24W                  |
| <b>Note:</b> The optical module and power supply are not included and need to be purchased. |  |                          |

## PACKING LIST

|              | Content   | Qty | Unit |
|--------------|---|-----|------|
| Packing List | 10-port full gigabit managed industrial Ethernet switch | 1   | SET  |
|              | RJ45-DB9 Line   | 1   | PC   |
|              | User Guide  | 1   | PC   |
|              | Warranty Card   | 1   | PC   |



## OPTICAL MODULE

| Product                    | Model       | Description  | Unit |
|----------------------------|-------------|--|------|
| 1.25G<br>Optical<br>Module | 2630-G      | Industrial SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. supports DDM function and hot plugging.                 | PC   |
|                            | 2632-G      | Industrial SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.               | PC   |
|                            | 2612-T-G    | Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging. | PC   |
|                            | 2613-R-G    | Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging. | PC   |
|                            | 2612-T-SC-G | Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging. | PC   |
|                            | 2613-R-SC-G | Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging. | PC   |
| Power<br>Module            | 2633        | 1.25G SFP optical module transfers to 10/100/1000M RJ45 port.  | PC   |

## POWER SUPPLY

| Product                                    | Model       | Description   | Unit |
|--|-------------|---|------|
| 24W DIN Rail<br>Industrial Power<br>Supply | GWS-DP24-24 | DIN Rail 24W single set of output power supply<br>Input Voltage: AC100V~240V 50-60Hz, 0.35A<br>Output Voltage: DC24V, 1.0A<br>Operation Temperature: -40℃ to +70℃ | PC   |

## RELATED PRODUCT

| Model              | Description   |
|--------------------|---|
| ONV-IPS33006FM     | L2+ managed industrial Ethernet fiber switch with 4*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP fiber ports. It can support dual DC power supply input and DIN rail mounting.  |
| ONV-IPS33012FM     | L2+ managed industrial Ethernet fiber switch with 2*10/100/1000M RJ45 ports and 12*100/1000M uplink SFP fiber ports. It can support dual DC power supply input and DIN rail mounting. |
| ONV-IPS33148FM     | L2+ managed industrial Ethernet fiber switch with 10*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. It can support dual DC power supply input and DIN rail mounting. |
| ONV-IPS33168FM     | L2+ managed industrial Ethernet fiber switch with 8*10/100/1000M RJ45 ports and 8*100/1000M uplink SFP fiber ports. It can support dual DC power supply input and DIN rail mounting.  |
| ONV-IPS33168FM-4GF | L2+ managed industrial Ethernet fiber switch with 12*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. It can support dual DC power supply input and DIN rail mounting. |

## CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT

Email: onv@onv.com.cn

Skype: onv@onv.com.cn

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333,

Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

