

Product Datasheet

52-port 10G Uplink L2+ Managed PoE Fiber Switch (ONV-POE56052PFM)



OVERVIEW

The ONV-POE56052PFM is a 10G uplink L2+ managed PoE fiber switch independently developed by ONV. It has 48*10/100/1000Base-T adaptive RJ45 ports and 4*1/10G uplink SFP+ fiber ports. Port 1-48 can support IEEE 802.3 af/at PoE standard and single-port PoE power reaches 30W. As a PoE power supply device, it can automatically detect and recognize the power-receiving equipment that meets the standard and supply power through the network cable. It can supply power to PoE terminal equipment such as wireless AP, IP camera, VoIP phone, building visual access control intercom, etc. through a network cable, to meet the network environment that needs a high-density PoE power supply. It is suitable for hotels, campuses, factory dormitories, and small and medium-sized enterprises.

The ONV-POE56052PFM has L2+ full network management function, supports IPV4/ IPV6 management, static routing full line-speed forwarding, complete security protection mechanism, complete ACL/ QoS policy, and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS (<20ms) to improve link backup and network reliability. When a one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application requirements, you can configure multiple application services such as PoE power management, port traffic control, VLAN division, and SNMP through the Web network management mode.

FEATURE

■ Gigabit wire speed access, uplink 1/10G SFP+ fiber port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit RJ45 port and uplink 1/10G SFP+ fiber port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

■ Smart PoE power supply

- ◇ PoE network management, realize PoE port power allocation, priority setting, port power status viewing, time scheduling, etc.
- ◇ Comply with IEEE 802.3 af/at PoE standard, automatically identify PoE devices for power supply, and not damage non-PoE devices.
- ◇ 48*10/100/1000Base-T RJ45 support PoE power to meet the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- ◇ The PoE port supports the priority mechanism. When the remaining power is insufficient, the power of the high-priority port is given priority to avoid overloading of the device.

■ Security

- ◇ Port isolation and storm control.
- ◇ IP+MAC+port+VLAN quadruple flexible combination binding function.
- ◇ 802.1X authentication provides authentication functions for LAN computers, and controls the authorization status of controlled ports according to the authentication results.

■ Strong business processing capability

- ◇ Support ERPS ring network and STP/RSTP/MSTP to eliminate layer 2 loops and realize link backup.
- ◇ Support IEEE802.1Q VLAN, Users can flexibly divide VLAN, Voice VLAN, and QinQ configuration according to their needs.

- ◇ Support static and dynamic aggregation to effectively increase link bandwidth, realize load balancing, link backup, and improve link reliability.
- ◇ Support QoS, port-based, 802.1P-based and DSCP-based three priority modes and four queue scheduling algorithms: Equ, SP, WRR, and SP+WRR.
- ◇ Support ACL to filter data packets by configuring matching rule processing operations and time permissions, and provide flexible security access control policies.
- ◇ Support IGMP V1/V2/V3 multicast protocol, IGMP Snooping meets multi-terminal high-definition video surveillance and video conference access requirements.

■ **Stable and reliable**

- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link, and PoE.
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable PoE power output.
- ◇ Low power consumption, with fan, galvanized steel metal shell, and excellent heat dissipation to ensure the stable operation of the switch.

■ **Easy O&M management**

- ◇ HTTPS, SSLV3, SSHV1/V2 and other encryption methods are more secure in management.
- ◇ RMON, system log, and port traffic statistics are convenient for network optimization and transformation.
- ◇ LLDP is convenient for the network management system to query and judge the communication status of the link.
- ◇ Various management and maintenance methods such as Web network management, CLI (Console, Telnet), SNMP (V1/V2/V3), Telnet, etc.

TECHNICAL SPECIFICATION


Model	ONV-POE56052PFM
Interface Characteristics	
Fixed Port	1*Console RS232 port (115200,N,8,1) 4*1/10G uplink SFP+ fiber ports (Data) 48*10/100/1000Base-T PoE ports (Data/Power)
Ethernet Port	Port 1-48 can support 10/100/1000BaseT auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)
Optical Fiber Port	1/10G SFP+ optical fiber port, default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)
Optical Fiber Port Expansion	Turbo overclocking 2.5G optical module expansion and ring network
Optical Cable/ Distance	Multi-mode: 850nm/ 0-500m, 0-300m(10G), Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km
Chip Parameter	
Network Management Type	L2+
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3ae 10GBase-LR/SR, IEEE 802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	216Gbps (non-blocking)
Forwarding Rate@64byte	131Mpps
CPU	Dual core 1GHz

DRAM	2GB
FLASH	256MB
MAC	32K
Buffer Memory	16MB
Jumbo Frame	12KB
LED Indicator	System: SYS (Green), PoE: PoE (Green), Network: Link(Yellow), Fiber port: L/A (Green)
Reset Switch	Yes, press and hold the switch for 10 seconds and release it to restore the factory settings
PoE & Power Supply	
PoE Port	Port 1-48
PoE Management	PoE working status display, Port PoE on/off, af/at power distribution
Power Supply Pin	1/2(+) 3/6(-)
Max Power Per Port	30W, IEEE 802.3 af/at
Power Consumption	Standby<30W, Full Load<600W
Power Supply	Built-in power supply, AC100~240V 50-60Hz, 6.6A
Physical Parameter	
Operation TEMP/ Humidity	-20°C~+55°C, 5%~90% RH Non condensing
Storage TEMP/ Humidity	-40°C~+80°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*290*44.5mm
Net /Gross Weight	4.8kg / 5.7kg
Installation	Desktop, 1U/19" cabinet
Certification & Warranty	
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	3 years, lifelong maintenance.

Network Management Feature	
Interface	<p>IEEE802.3x flow control (full duplex)</p> <p>Port exception protection mechanism</p> <p>Port real-time flow management (Flow Interval)</p> <p>Broadcast storm suppression based on port rate</p> <p>Optical port SFP module DDMI real-time digital diagnosis</p> <p>Port IEEE Green Ethernet Energy-Saving configuration and status view</p> <p>Limit the rate of incoming and outgoing packet traffic, with mini granularity is 16Kbps and max 1Gbps</p>
L3 Feature	<p>IPv4/IPv6 static routing, max 128 entries, dual-stack management</p> <p>L2+ network management function, ARP protocol, max 1024 entries</p>
VLAN	<p>VLAN based on MAC, VLAN based on the protocol</p> <p>Port configuration of Access, Trunk, Hybrid, GVRP VLAN protocol</p> <p>(4K) VLAN based on port, IEEE802.1q, Voice VLAN, QinQ configuration</p>
Port Aggregation	<p>LACP, Static aggregation</p> <p>Max 26 aggregation groups and 8 ports per group.</p>
Spanning Tree	<p>STP BPDU Guard, BPDU filtering and BPDU forwarding</p> <p>STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)</p>
ERPS Ring Network Protocol	<p>Support ERPS ring network, Recovery time less than 20ms, ITU-T G.8032</p>
Multicast	<p>MLD Snooping, Multicast VLAN</p> <p>User quick log out, MVR (Multicast VLAN Registration)</p> <p>IGMP Snooping v1/v2/v3 and 1024 multicast groups at most</p>
Mirroring	<p>Bidirectional traffic mirroring for basic ports</p> <p>Supports 1-to-multiple mirroring, supports up to 4 port sessions</p>
QoS	<p>Queue scheduling algorithm (SP, WRR, SP+WRR)</p> <p>Flow-based rate limiting, Flow-based packet filtering</p> <p>Flow-based based redirection, 8*Output queues of each port</p> <p>802.1p/ DSCP priority mapping, Diff-Serv QoS, Priority Mark/ Remark</p>
ACL	<p>ACL distribution based on port and VLAN</p>


	L2-L4 packet filtering function, matching the first 80 bytes message, and provides ACL definitions based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.
Security	<p>ARP intrusion detection function</p> <p>ARP message rate limiting function</p> <p>Port-based IEEE802.1X certification</p> <p>Port broadcast message suppression</p> <p>SSL ensures data transmission security</p> <p>Port isolation, IP source address protection</p> <p>Host data backup mechanism, Anti-DoS attack</p> <p>Limit on the number of MAC addresses learned</p> <p>AAA&RADIUS certification, MAC address black hole</p> <p>User hierarchical management and password protection</p> <p>SSH 2.0 provides a secure encrypted channel for user login</p>
DHCP	DHCP Client, DHCP Snooping, DHCP Server
Management	<p>Web network management (https)</p> <p>View CPU real-time utilization status</p> <p>Link Layer Discovery Protocol (LLDP)</p> <p>NTP clock, SNMP V1/V2/V3, System work log</p> <p>One click recovery, Ping detection, Cable status check</p> <p>ONV NMS platform cluster management (LLDP+SNMP)</p> <p>Console/ AUX Modem/ Telnet/ SSH2.0 and CLI configuration</p> <p>FTP, TFTP, Xmodem, SFTP file upload and download management</p>
System	<p>Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher, Cat5 and above Ethernet cable</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, Mac OS X) installed on each computer in the network</p> <p>Cat5 and above Ethernet cable</p>

DIMENSION

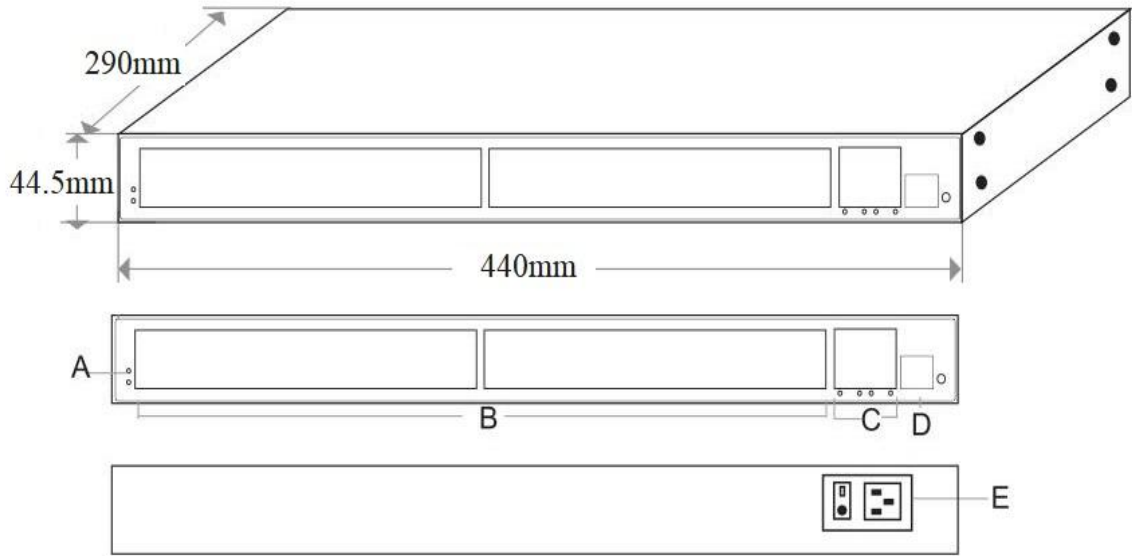

- A. Working indicator
- B. 48*10/100/1000M PoE ports
- C. 4*1/10G uplink SFP+ fiber ports
- D. Console port
- E. Power input port AC100-240V, 50/60Hz

APPLICATION

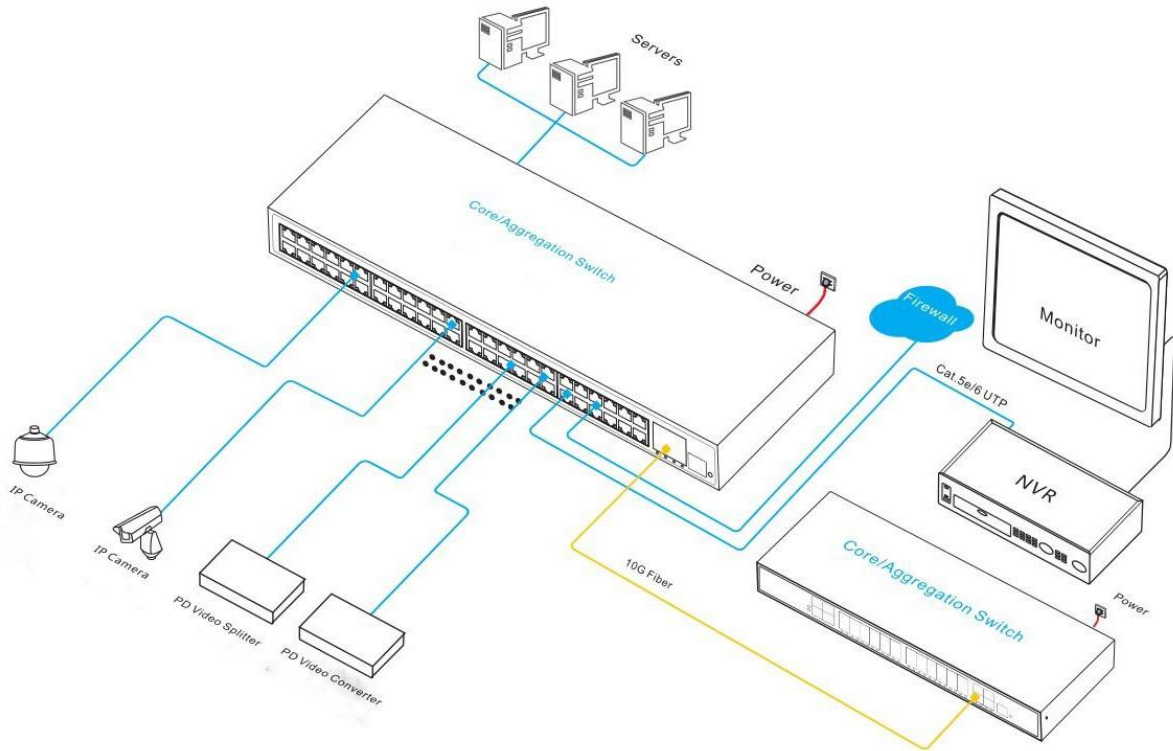

ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV-POE56052PFM	L2+ managed PoE switch with 48*10/100/1000M RJ45 ports and 4*1/10G uplink SFP+ fiber ports. Port 1-48 can support IEEE 802.3 af/at PoE standard. It built-in power supply and 1U/19" cabinet installation.	600W

Note: The optical module is not included and needs to be purchased.

PACKING LIST

	Content	Qty	Unit
Packing List	52-port 10G uplink managed PoE switch	1	SET
	AC Power Cable	1	PC
	RJ45-DB9 Line	1	PC
	Mounting Kits (Hanging Ear)	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630	SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. support DDM function and hot plugging.	PC
	2632	SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC

	2612-T	SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	2613-R	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	2612-T-SC	SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. support DDM function and hot plugging.	PC
	2613-R-SC	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. support DDM function and hot plugging.	PC
Power Module	2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC
10G Optical Module	6630	SFP+ optical module, 10G multi-mode dual fiber 850nm, transmission distance: 300m, LC interface. support DDM function and hot plugging.	PC
	7832	SFP+ optical module, 10G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	7832-33	SFP+ optical module, 10G single-mode single fiber TX1330nm/ RX1270nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	7832-27	SFP+ optical module, 10G single-mode single fiber TX1270nm/ RX13300nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC

RELATED PRODUCT

Model	Description
ONV-POE56028PFM	L2+ managed PoE switch with 24*10/100/1000M RJ45 ports and 4*1/10G uplink SFP+ fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard. It built-in 400W power supply and 1U/19" cabinet installation.
ONV-POE56036PFM	L2+ managed PoE switch with 16*10/100/1000M RJ45 ports and 8*10/100/1000Base-T RJ45 ports and 8*100/1000Base-X uplink SFP fiber combo ports and 4*1/10G uplink SFP+ fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard. It built-in 400W power supply and 1U/19" cabinet installation.

CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Skype: onv@onv.com.cn

WeChat ID: ONV-PoE-IoT

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333,

Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

