


Product Datasheet

24-port 10/100M Ethernet Switch

(ONV-H1024)

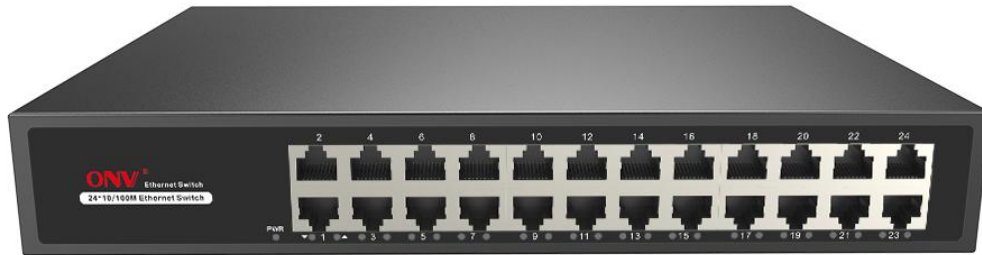

OVERVIEW

The ONV-H1024 is a high performance and easy-to-maintain high speed forwarding Ethernet switch independently developed by ONV. It is suitable for hotels, banks, campuses, factory dormitories, and small and medium-sized enterprises.

The ONV-H1024 has 24*10/100M adaptive RJ45 ports. Each port support full line-speed forwarding. 4M large-capacity cache to ensure timely transmission of large files and stable video streaming. 7*24 hours of stability, and no disconnection effectively solving problems such as video freezes and picture loss in high-definition surveillance environments. Plug and play, no configuration, simple and convenient to use.

FEATURE

- **10/100M access, full line-speed forwarding**
- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.

- ◇ Support 10/100M adaptive RJ45 port, plug and play, to meet the networking needs of various scenarios.

■ Stable and reliable


- ◇ CCC, CE, FCC, RoHS.
- ◇ Plug and play, no configuration, simple and convenient.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR and Link.
- ◇ Adopt high stability power supply, high redundancy design to provide long-term stable power output.
- ◇ Low power consumption, no fan, metal housing, and excellent heat dissipation to ensure the stable operation of the switch.

TECHNICAL SPECIFICATION


Model	ONV-H1016	ONV-H1024
Interface Characteristics		
Fixed Port	16*10/100Base-TX RJ45 ports (Data)	24*10/100Base-TX RJ45 ports (Data)
Ethernet Port	Port 1-16/1-24 support 10/100Base-TX auto-sensing, full/ half duplex MDI/MDI-X self-adaption	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters)	
Chip Parameter		
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3x	
Forwarding Mode	Store and Forward (Full Wire Speed)	
Switching Capacity	7.2Gbps (non-blocking)	8.8Gbps (non-blocking)
Forwarding Rate @64byte	2.38Mpps	3.57Mpps

MAC	16K	
Buffer Memory	4M	
Jumbo Frame	10K	
LED Indicator	Power: PWR (Green), Network: Link (Green)	
Power Supply		
Total PWR / Input Voltage	13W/ (AC100-240V)	16W/ (AC100-240V)
Power Consumption	Standby<7W, Full Load<13W	Standby<8W, Full Load<16W
Power Supply	Built-in power supply, AC100~240V 50-60Hz, 0.56A	
Physical Parameter		
Operation Temp/ Humidity	-10~+55°C, 5%~90% RH Non condensing	
Storage Temp/ Humidity	-40~+75°C, 5%~95% RH Non condensing	
Dimension (L*W*H)	270*181*44.5mm	
Net /Gross Weight	1.05kg /1.55kg	1.1kg /1.6kg
Installation	Desktop, Wall mount, 1U/19 inch	
Certification & Warranty		
Lightning Protection	Lightning protection: 4KV 8/20us; Protection level: IP30	
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS	
Warranty	1 year, lifelong maintenance.	

DIMENSION

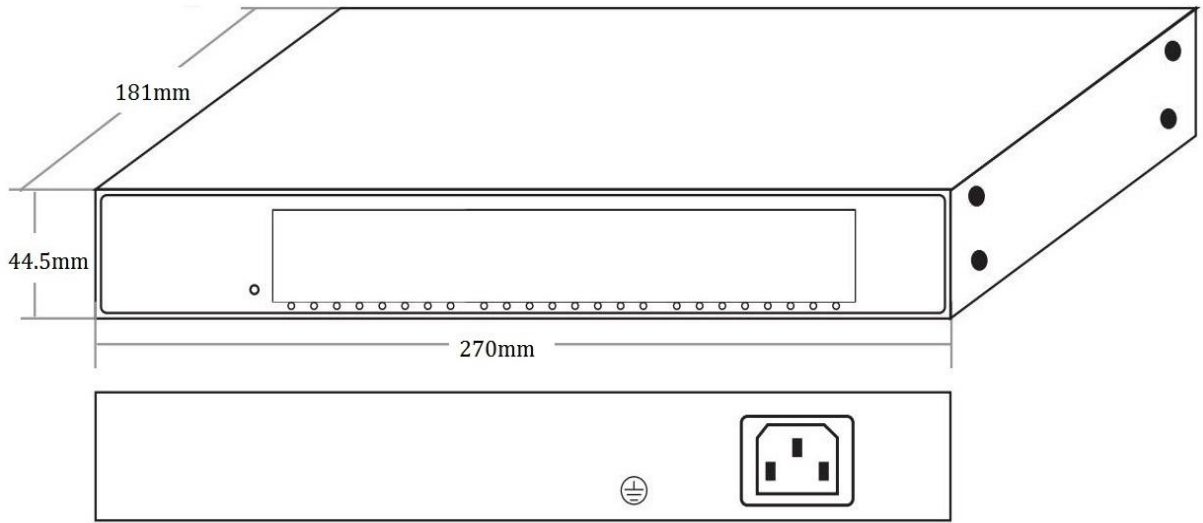

APPLICATION

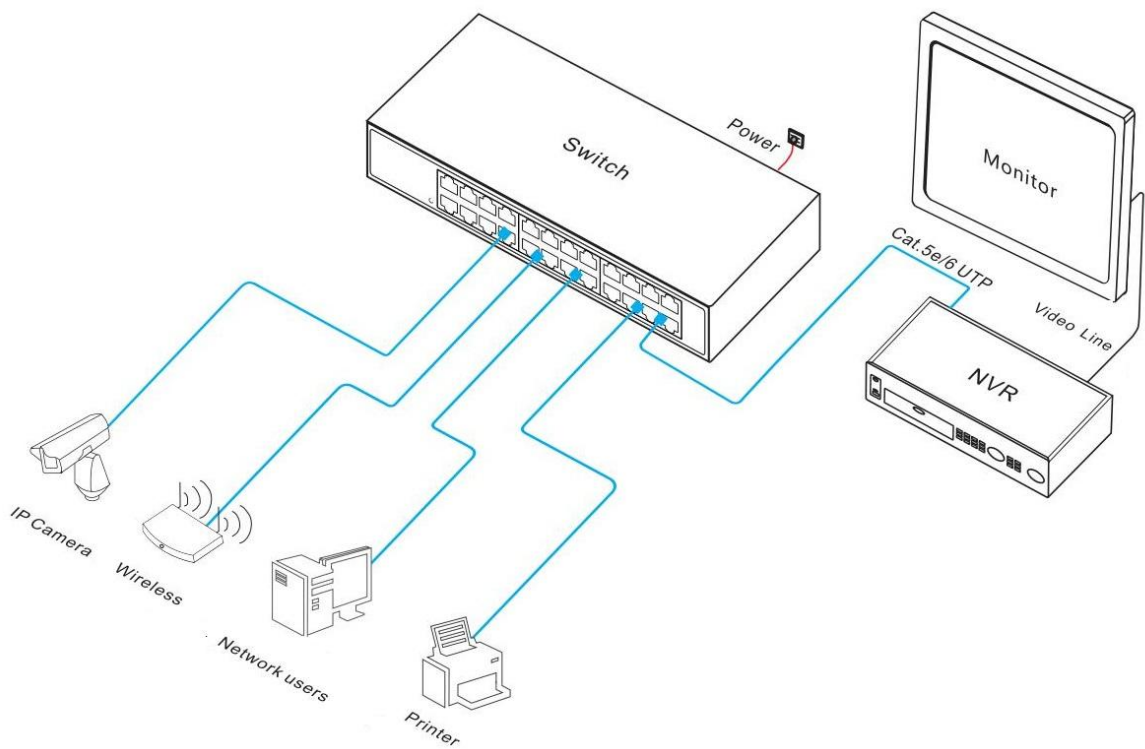

ORDERING INFORMATION

Model	Description	Configure Power Supply
ONV-H1016	Unmanaged Ethernet switch with 16*10/100M RJ45 ports. It built-in power supply and 1U/19" cabinet installation.	20W
ONV-H1024	Unmanaged Ethernet switch with 24*10/100M RJ45 ports. It built-in power supply and 1U/19" cabinet installation.	

PACKING LIST

	Content	Qty	Unit
Packing List	24-port 10/100M Ethernet Switch	1	SET
	AC Power Cable	1	PC
	Mounting Kit	1	SET
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

RELATED PRODUCT

Model	Description
ONV-H1005S	Plastic case unmanaged Ethernet switch with 5*10/100M RJ45 ports. External power supply.
ONV-H1008S	Plastic case unmanaged Ethernet switch with 8*10/100M RJ45 ports. External power supply.
ONV-H3005S	Plastic case unmanaged Ethernet switch with 5*10/100/1000M RJ45 ports. External power supply.
ONV-H3008S	Plastic case unmanaged Ethernet switch with 8*10/100/1000M RJ45 ports. External power supply.

ONV-H3016	Unmanaged Ethernet switch with 16*10/100/1000M RJ45 ports. It built-in power supply and 1U/19" cabinet installation.
ONV-H3024	Unmanaged Ethernet switch with 24*10/100/1000M RJ45 ports. It built-in power supply and 1U/19" cabinet installation.

CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Skype: onv@onv.com.cn

WeChat ID: ONV-PoE-IoT

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333,

Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

